(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

PCT

(43) International Publication Date
15 March 2001 (15.03.2001)

(10) International Publication Number
WO 01/18533 A1

(51) International Patent Classification[7]: G01N 22/00

(21) International Application Number: PCT/GB00/03431

(22) International Filing Date: 7 September 2000 (07.09.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
9921042.9 7 September 1999 (07.09.1999) GB

(71) Applicant and
(72) Inventor: STOVE, George, Colin [GB/GB]; 41 Craiglockhart Park, Edinburgh EH14 1EU (GB).

(74) Agent: MURGITROYD & COMPANY; 373 Scotland Street, Glasgow G5 8QA (GB).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:
— *With international search report.*
— *Before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments.*

[Continued on next page]

(54) Title: RADAR APPARATUS FOR IMAGING AND/OR SPECTROMETRIC ANALYSIS AND METHODS OF PERFORMING IMAGING AND/OR SPECTROMETRIC ANALYSIS OF A SUBSTANCE FOR DIMENSIONAL MEASUREMENT, IDENTIFICATION AND PRECISION RADAR MAPPING

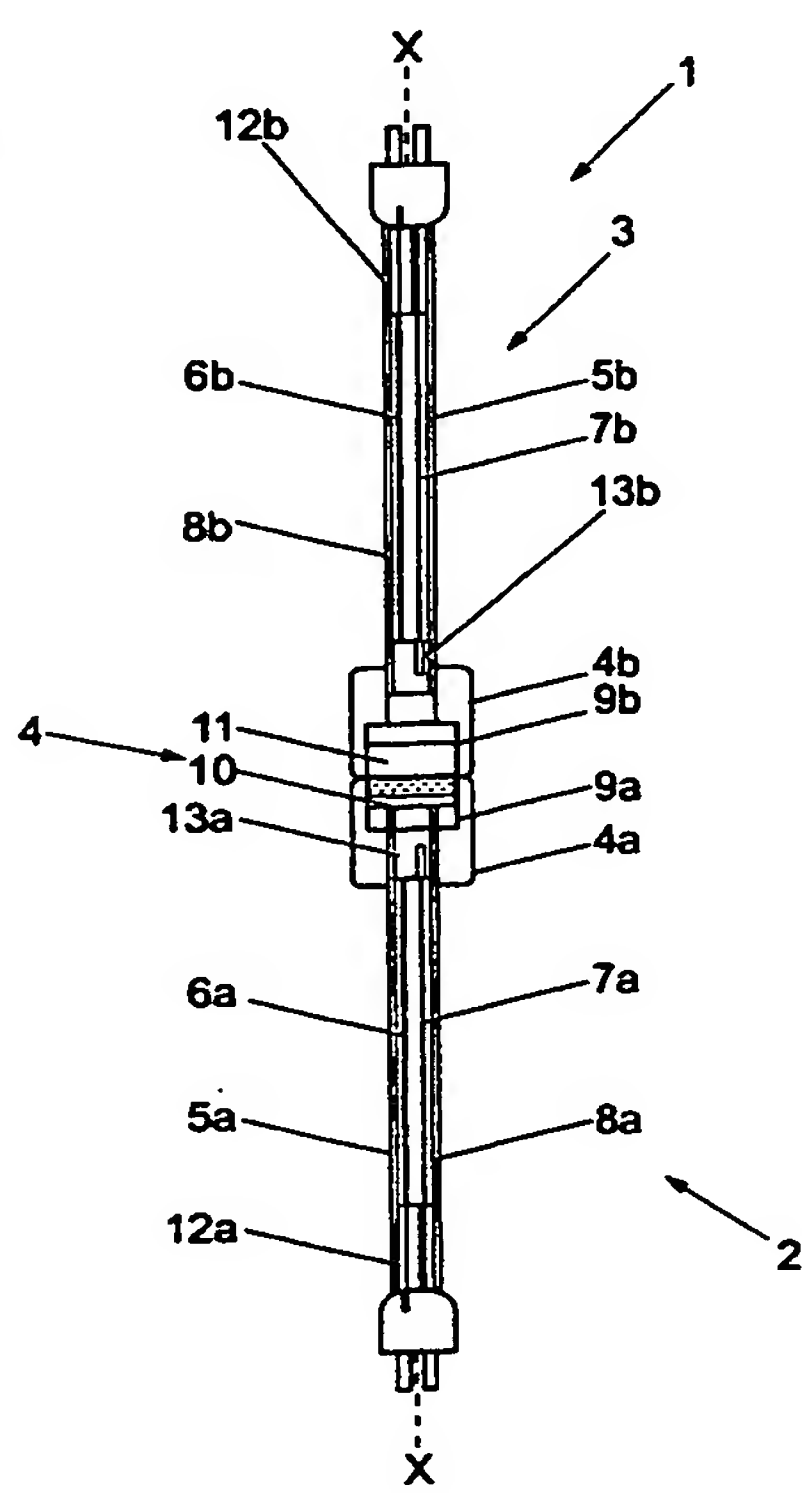

(57) Abstract: Radar apparatus and methods of use thereof for imaging and/or spectrometric analysis. The invention employs pulsed radar signals for magnifying, imaging, scale measuring, identifying and/or typecasting the composition of substances by radargrammetric imaging and/or statistical analysis of energy/frequency spectrums. The invention may be used to locate and/or distinguish a substance from other substances, to image a substance/feature and to monitor the movement of an imaged substance/feature. The systems and methods can be adapted for a variety of applications at a wide range of scales and distances, from large scale, long range applications such as geophysical imaging/analysis, to the small scale such as material typecasting applications and small scale (including microscopic) imaging/analysis, including biological and- medical imaging and diagnostic applications. The invention includes novel antenna assemblies and novel data processing techniques.

WO 01/18533 A1

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Radar Apparatus for Imaging and/or Spectrometric Analysis and Methods of Performing Imaging and/or Spectrometric Analysis of a Substance for Dimensional Measurement, Identification and Precision Radar Mapping

This invention relates to radar apparatus and methods of use thereof for imaging and/or spectrometric analysis. In particular, it relates to pulsed radar apparatus for magnifying, imaging, scale measuring, identifying and/or typecasting the composition of a substance by radargrammetric imaging and/or spectrometric analysis. The invention further relates to the use of the radar apparatus to locate and/or distinguish a substance from other substances. The invention may additionally be used to image a substance/feature and to monitor the movement of an imaged substance/feature. Such moving substances/features include but are not limited to the flow of blood and other substances moving within a human or animal body, and substances/features in a

subterranean environment, such as the movement of water, oil, gas and/or contaminants below the ground surface, below standing or flowing water bodies, or below sea level and the seabed.

Radar systems and methods in accordance with the invention can be adapted for a variety of applications at a wide range of scales and distances. These vary from large scale, long range applications such as airborne, seaborne and ground based geophysical imaging/analysis of the Earth's surfaces and sub-surfaces, for example precision mapping and classification of sea-bed materials and also soil, sediment and rock type mapping and classification to medium scale, medium range applications such as "ground level" (on land or water bodies) imaging/analysis such as sea-bed and ground penetrating applications at relatively shallow depths, to the small scale such as material typecasting applications and small scale (including microscopic) imaging/analysis, including biological and medical imaging and diagnostic applications. The invention might also be extended to very long range/large scale space based imaging and analysis applications, such as orbital surveying of planets and astronomical applications.

The scale (i.e. range and resolution) the radar apparatus operates on is determined to a greater or lesser extent by the geometry of transmitting and receiving antenna apparatus employed in systems according to the invention. It is also affected by the

properties of dielectric materials employed in such apparatus.

Certain aspects of the invention concern certain conditions being achieved during the set up of the apparatus so as to obtain "standing wave oscillations" in sample chambers and/or in antenna assemblies. In this respect it is important to selectively control the group velocity of the radiation as it is emitted or "launched" by the transmitter into the surrounding medium. In particular, for deep scanning it is important for the launch speed of the wave to be sufficiently slow to ensure that the wave can be accurately registered at a precise "zero time" location by the receiver after the pulse has been transmitted. The zero time position is the start position for range measurements and must be identified on the received radar signal to determine the true range represented by the received signal.

Setting up the standing wave oscillations for different time ranges or time windows such as, for example, 25 ns, 50 ns, 100 ns, 1000 ns or 20,000 ns, would all involve different zero time locations. Different time ranges are required to enable the different depth ranges required for certain precision mapping applications to be obtained. Accurate location of the zero time point is important and can be a difficult procedure: inaccurately pinpointing the zero time introduces a systematic shift in the location of all radar measurements. Certain embodiments of the invention register the zero time location prior to the

received radar signal being converted from analogue to digital form. This enables a more accurate zero time to be located than can be obtained by using conventional techniques. Preferred embodiments of the invention locate the optimum position for time zero, for mapping or "staring" operations, by digital means using mathematical logic.

A blind spot of the order of 1 meter in close proximity (the near range) to the radar apparatus could generate an equivalent position shift in the radar map of features detected. Such near range blind spots can thus be highly undesirable. By accurately locating the position of the zero time point in the received signal radar, such blind spots can be mitigated or obviated.

Although ground penetrating radars (GPRs) are already known as non-destructive testing tools their analytical capabilities have been restricted and imaging is often crude using conventional devices. Conventional radar systems which use electromagnetic waves to investigate the internal structure of non-conducting substances within the ground provide relatively low resolution. Furthermore, they are often unwieldy devices and require skilled technical operators.

The apparatus, systems and methods of the invention may be used for a variety of purposes, particularly but not exclusively three basic types of application. The first of these relates to identifying or "typecasting" unknown materials using their spectral characteristics; i.e. using energy-frequency characteristics, and may be

referred to generally as "typecasting" operations. The second relates to use of the equipment in the field or laboratory, for detecting and/or mapping and/or measuring and/or analysing structures or materials, for example; these may be referred to generally as "surveying" operations. The third relates to use of the apparatus to locate materials previously typecast, and to search for them in the field or laboratory and may be referred generally to as the "searching" operations. The various types of operation are supported by suitable software which enables the field or laboratory imaging and analysis processes to be performed in near real time.

The inventor believes that a key feature of the invention is the set up of resonant conditions in the transmitter/receiver apparatus. This is affected by the dimensions and/or the geometry of a transmitter cavity and a receiver cavity which substantially surround respective transmitting and receiving antennae. In particular, the relative proportions of the lengths and widths of the antenna element(s) to the lengths and widths of the surrounding cavities are important. Ideally the internal diameter of an antenna cavity, whose walls may form the cathode element of an antenna in certain embodiments, is an integer multiple of the diameter of the internal antenna anode element, and similarly, the internal length of the is ideally an integer multiple of the length of the antenna anode element. The resonant conditions may be further affected by at least partially cladding the antennae element(s) with a suitable dielectric cladding

material. Furthermore, the selection of a suitable dielectric material to clad the transmitting and receiving antenna elements is believed to further assist in the near range focusing and in more accurately pin-pointing the zero time position, the start position for range measurements.

The invention seeks to provide radar apparatus having a transmitter which is capable of emitting a beam of electromagnetic radiation into or towards a substance and a receiver which is capable of receiving electromagnetic radiation which has passed through or been reflected from the substance. The radiation is preferably a pulsed radar type signal. The radar signal may be provided by a conventional pulsed radar unit. The radar apparatus includes a suitable tuning means which is capable of controlling the spectral characteristics, for example the power and bandwidth, of the emitted radar signal. The spectral characteristics of the emitted radar signal are controlled so that by suitably irradiating a substance, a frequency response dependent on the composition of the substance can be detected by the receiver.

Suitable substances whose composition and/or structure can be detected by the apparatus include solids, liquids and composite substances such as powders, soil or sediment. Liquid substances may be admixtures and/or emulsions (e.g. air/oil etc.).

The spectrometric analysis of the data acquired by the radar apparatus is performed on a computer which is

capable of running a suitable software program to implement the required analysis.

The frequency response obtained by irradiating a substance displays characteristics which the inventor believes are at least partially dependent on the interaction of the transmitted signal with the sub-atomic structure of the substance to be analysed. The radar apparatus may further include suitable filter devices to control the spectral characteristics, for example bandwidth and/or polarisation, of the signals.

Optionally, the radar signal may be transmitted into a chamber capable of holding a sample of the substance.

In certain embodiments of the invention, the transmitted signal is controlled so that resonant conditions, i.e. standing waves, are set up within the radar apparatus. Preferably, the resonant conditions occur within transmitting/receiving cavities surrounding the antennae. Further resonant conditions may be generated within the substance and/or within a chamber enclosing the substance. Such resonant conditions may be established by selectively tuning the parameters of the emitted signal until the spectrum of the received signal indicates resonant conditions.

The radar apparatus is preferably configured so as to be capable of providing a highly collimated or selectively focussed beam over a desired range.

The boundary conditions for resonant standing waves are at least partially dependent on the surface boundaries of the substance itself, and may be further affected by any internal structure within the substance. Composite materials, for example, may exhibit more complex boundary conditions which can enable the structure of the substance to be determined; for example, the degree of granularity of a powdered sample may be determined to some extent using the radar apparatus.

The invention, in its various aspects, variants and optional and preferred features, is defined in the Claims appended hereto.

Embodiments of the invention will now be described, by way of example only, with reference to the accompanying drawings in which:

Fig 1 is a block diagram of a radar system embodying one aspect of the present invention;

Fig 2 is a block diagram of a preferred embodiment of a radar system similar to that of Fig. 1;

Figs. 3A and 3B are cross-sections of test chambers incorporating receiving and transmitting antennas embodying another aspect of the invention;

Fig. 4 is an exploded internal plan-view of the test chamber illustrated in Fig. 3A;

Fig. 5A is a cross-sectional side view of an antenna assembly for use as a transmitter or receiver embodying a further aspect of the invention;

Fig. 5B is a cross-sectional side view of a first variant of the antenna assembly of Fig. 5A;

Fig. 5C is a cross-sectional side view of a second variant of the antenna assembly of Fig. 5A;

Fig. 5D is a cross-sectional side view of a third variant of the antenna assembly of Fig. 5A;

Fig. 5E is a cross-sectional side view of an antenna assembly for use as a transmitter or receiver, similar to that of Fig. 5A;

Figs. 5F to 5N are schematic end views illustrating variants of antenna assemblies of the type shown in Fig. 5E;

Fig 6A is a cross-sectional view of radar apparatus set up for chamber mode operation according to one embodiment of the invention;

Fig. 6B is a cross sectional view of apparatus set up according to a variation of the embodiment of Fig. 6A;

Fig. 7A illustrates an example of an arrangement of radar apparatus for operation in a reflection mode in accordance with a further embodiment of the invention;

Fig. 7B illustrates a further arrangement of radar apparatus for operation in a transillumination mode in accordance with a further embodiment of the invention;

Figs. 8A to 8D are sketches which illustrate various embodiments of the invention suitable for the remote detection and/or imaging and/or typecasting of substances/objects;

Fig. 9 is a sketch illustrating an embodiment of radar apparatus in accordance with the invention suitable for sea-bed scanning;

Fig. 10 is a sketch illustrating another embodiment of apparatus embodying the invention suitable for sea-bed scanning;

Fig. 11A shows an example of a microscope fitted with transmitting and receiving antenna assemblies in accordance with a further embodiment of the invention.

Fig. 11B illustrates the relative movement of a transmitting antenna and receiving antenna in accordance with a further embodiment of the invention.

Fig. 12 is a table summarising various parameters as used in a variety of embodiments of the invention.

Fig. 13 is an image recorded using the radar apparatus according to the invention.

Firstly, apparatus embodying various aspects of the invention will be described.

Fig. 1 is a generic block diagram illustrating the basic architecture of radar systems in accordance with the invention. A pulsed radar unit 21 is powered by a power supply 20. The radar unit 21 is connected to a transmitting ("Tx") antenna assembly or antenna array 2 and to a receiving ("Rx") antenna assembly or antenna array 3. The radar unit 21 may be of a conventional type, suitably a Ground Penetrating Radar (GPR) set, capable of providing controlled signal pulses to the Tx antenna assembly 2 and of receiving and processing return signals received by the Rx antenna assembly 3 and includes suitable input/output means to transmit and receive pulsed signals. The general configuration, controls etc. of radar sets of this type will be well known to persons skilled in the art and will not be described in detail herein. The controls of the radar unit 21 enable the characteristics of the transmitted pulse to be controlled, such characteristics including, for example, the pulse profile, width, duration and energy. For the purposes of the present invention, the radar set 21 acts primarily as a pulse generator for driving the Tx antenna.

The radar unit 21 is connected to an analog/digital (A/D) converter 22 and control unit 25, for controlling the operation of the radar unit 21 and for receiving analog signals received by the radar unit via the Rx antenna 3 and for converting the analog signals to digital form. The A/D converter and control unit 22,25

are in turn connected to signal processing and display means 23, typically comprising a suitably programmed personal computer, with associated data storage means 24 of any suitable type(s) (hard disk and/or tape and/or writable CD-ROM etc.). The computer 23 generally includes a suitable visual display device (not shown).

The power supply means 20 may be a mains supply, or a generator and/or a battery supply. The power supply means 20 may be provided internally within the pulse generation unit 21 or externally. Typically, the power supply means 20 is a 12 volt DC supply which may be a mains supply converted to 12 V DC, or alternatively, especially in portable embodiments of the invention, be a 12V generator and/or a 12V DC battery supply.

The radar unit, A/D converter and control unit and the computer may be combined in a variety of configurations in custom built apparatus. As illustrated, the system preferably comprises a standard radar unit, a standard computer with software suited to the methods of the present invention, and a purpose built A/D converter and control unit.

The computer is suitably a ruggedised portable computer (laptop) with a suitably powerful processor, e.g. a Pentium-type processor, and adequate memory (RAM) and mass storage capacity.

The A/D converter 22 is preferably designed so that in use it is capable of receiving at least three signal

inputs. An additional signal input, for example a voice data input, may also be provided.

The system is operable in at least one of three general modes of operation, in accordance with the invention: "chamber" modes in which a sample of material under investigation is enclosed in a chamber, the Tx antenna being arranged to irradiate the interior of the chamber and the Rx antenna being arranged to receive signals modified by the interaction of the transmitted signals with the chamber and its contents; "transillumination" modes in which the Tx antenna is arranged to transmit signals through a sample of material or an object, body or structure etc. under investigation and the Rx antenna is arranged to receive signals which have passed through the sample, object etc.; and "reflection" mode in which the Rx antenna receives signals transmitted by the Tx antenna and reflected by a sample, object, body or structure etc. These various modes of operation will be discussed in more detail below. The various modes of operation are used for a variety of imaging, mapping, measuring and typecasting functions, as shall also be described in more detail hereinafter.

Fig. 2 illustrates a preferred embodiment of a multi-purpose radar system in accordance with the invention which can employ a variety of types of transmitting and receiving antennas, antenna assemblies or antenna arrays, including the preferred antennas and antenna assemblies described hereinbelow.

Referring to Fig. 2, the system comprises a radar control unit (RCU) 500, a computer 506, a transmitter unit 507, a receiving unit 508, a transmitting antenna 550, a receiving antenna 552 and a power supply 519.

The RCU has its own motherboard with a processor 501, DMA controller 502, a buffer memory module 503 and an input/output controller 504, all linked to a system bus 505. The I/O controller 504 is directly connected to the external computer 506, which controls all digital set-ups, data storage and data analysis. The RCU 500 provides the timing signals for controlling the transmitting and receiving units 507 and 508, which are directly linked to the transmitting and receiving antennas 550, 552. The antennas 550, 552 may be single or multiple elements. The timing signals are controlled by parameters output from the computer 506 to the RCU 500. The RCU 500 also relays digitised data from the receiver unit 508 back to the computer 506. The RCU 500 consists of analogue and digital logic with a programmable central processing unit (CPU) 501.

The RCU sets up a Pulse Repetition Frequency (PRF). The transmitter unit 507 essentially consists of a pulse generator 512 designed to produce strong pulses with characteristics, including the PRF, determined by the RCU. The pulse is limited by the high voltage, current and power required. Extending the pulse width reduces the voltage and current needed for the same average pulse energy. Too short a pulse will produce too much high frequency energy which is not necessary for certain applications in which high frequencies are

absorbed more than the lower frequencies in the subject under examination (e.g. the ground in sub-surface ground applications). Higher frequencies may be required for other applications including shallow range modes of operation (e.g. for microscopic slide scanning applications in medical tissue studies).

In the transmitter unit 507, the pulse is triggered by a digital "Trig in" pulse sent from the RCU 500, via a PRF module 509 which channels the Trig in pulse through a fixed delay line 510. The Trig in pulse 511 is responsible for triggering the transmitted pulse in the transmitter unit 507. A delay/gain control 513 in the RCU 500 controls a gain control 514 to generate a fixed time varying gain (TVG) and fixed delay line 510 for the transmitter unit 507. The same delay/gain control 513 operated upon by the PRF module 509 also creates a variable TVG for the receiver unit amplifier 518 and a variable delay line 515 for a sample and hold module 516 of the receiver unit 508. The rate at which pulses are transmitted is referred to as the pulse repetition frequency (PRF) and the PRF module 509 sets the required PRF for each particular mode of operation of the system. The PRF must be long enough to allow analogue to digital (A/D) conversion to be performed by the A/D converter 517 of the receiver unit 508 and to cover the required time window for the particular instrument measuring application.

The receiver unit 508 includes a low noise amplifier 518 which amplifies the analogue signal received via the receiver antenna 552, which is sampled by the

sample and hold module 516 and digitised by the A/D converter 517 when requested by a digital signal from the RCU 500.

The A/D converter 517 is responsible for analogue to digital sampling and the digital sampling frequency should ideally be no greater than the time spacing between picture elements (pixels) of the output signal data. A smaller sampling interval results in aliasing (i.e. increasing noise) of the signal. A longer sampling interval attenuates the higher frequency components of the signal. The advantage of the variable TVG from the gain control 514 to the receiver amplifier is that the A/D conversion may be performed to the same precision with a lower number of bits.

The digital data obtained from the A/D converter enable real-time analysis of
i) a positioning fix sign or chainage mark, enabling the location of a substance/image to be determined;
ii) imaging signal information;
iii) typecasting information - i.e. the spectral characteristics of the scanned substance/object;
iv) a voice-over to be further recorded from the user via a suitable microphone as a digital signal.

In use of the radar apparatus, the A/D converter converts the received signal from analogue format to a 12-bit digital signal and combines this with a synch pulse and electronic fix data. The signal is buffered and synchronised with a 16 bit computer signal to

condition the data. Image data are converted into 8-bit image files.

The computer 506 controls the overall functions of the other units and provides a user interface for the selection of control and survey parameters, data collection, data enhancement, image production, image analysis, material typecasting, material testing and data logging etc..

The entire radar system is powered either by mains power 519 or battery power conversion 520.

There are four primary signal, data and control linkages between the components of the system: transmitter 507 to receiver 508, RCU 500 to transmitter 507, receiver 508 to RCU 500, and RCU 500 to computer 506. The transmitter to receiver linkage is via the antennas 550, 552 and intervening media such as air or other gases, water or other liquids, the ground, vacuum etc. There may also be unintentional transmitter-receiver linkage through RCU-transmitter cables and receiver-RCU cables if they are conducting. When this occurs, touching the cables may cause an electrical short which can affect output data. The RCU-transmitter and receiver-RCU linkages will generally be metal or glass fibre, but can be wireless connections such as radio or optical through vacuum and/or gaseous and/or liquid media. Metal is preferably avoided for the above mentioned reasons. The RCU-computer linkage will normally be a serial or parallel port connection, since the required data rates are not unusually high.

Other possible links include USB, PCMCIA, IrD or radio modem.

Examples of various antennas and antenna assemblies, embodying further aspects of the invention, will now be described, which are particularly suited for the purposes of the invention when operated in one or more of its various modes.

Figs. 3A, 3B and 4 illustrate examples of antenna/chamber assemblies suited for chamber mode operations in accordance with the invention, particularly for typecasting applications performed on material samples or relatively small objects.

Fig. 3A shows a cross-section through a sample irradiation chamber 100a which has a preferred pyramidal geometry. Fig. 3B shows a cross-section through a sample irradiation chamber 100b which has an upper section with a pyramidal geometry similar to that of Fig. 3A but with a rectangular chamber extending downwardly from the base of the pyramid. Fig. 4 shows an exploded overhead view of the embodiments illustrated in Figs. 3A and 3B indicating the antenna configuration.

The cross-section along lines X-X' of Fig. 4 is illustrated in Fig. 3A. In Fig. 4. A transmitting antenna 102 and a receiving antenna 103 are directly provided within the chambers 100. Fig 3A shows the configuration of the transmitting antenna 102 in profile. A cathode feed connector wire 111 connects a

cathode half of a transmitting bowtie dipole element 115a to the pulse generator of the system. An anode feed connector wire 112 connects the anode half of the transmitter bowtie element 115b provided on the opposite internal face of the chamber 100 to the receiver side of the system.

Fig. 4 illustrates the orientation of a receiving cathode bowtie dipole component 120a and connecting cathode feed connector wire 118 and a receiving anode bowtie dipole component 120b and connecting anode feed connector wire 119.

To increase the detection of cross-polarised reflections and to reduce the detection of other reflections, the receiver dipole components 120a,120b are orientated at 90° to the transmitter dipole components 115a,115b.

To ensure that a sample of material 116 placed within the chamber 100 (as Fig. 3A and 3B show) is sufficiently irradiated, the chamber 100 is provided with a suitable geometry to enhance the internal reflection and is suitably sealed to eliminate radiation leaks. Alternatively the chamber and/or transmitter/receiver tubes are vacuum sealed. A wall 113a or base 113b of the chamber 100 is configured so that access to the interior is provided so as to enable the sample 116 to be placed inside. For example, the entire base 113b of the chamber 100 may be detachable.

Radiation shielding of the interior and the elimination of any radiation leaks from the interior is provided by the selection of suitable construction materials for the chamber 100. For example, the walls 113a and base 113b of the chamber 100 may be constructed from an insulating material such as plastic, and may be bonded externally or internally to an electrically conducting material such as copper 114. Alternatively, the base 113b may be made of a metallic substance to optimise base reflections.

In the Fig. 3B chamber, to ensure that the optimal number of reflections occur in the chamber interior, the rectangular side walls 122 are preferably provided with a metallic inside surface. This enables omni-directional backwall and base reflections from the transmitted radiation to penetrate the sample. The geometry of the chamber 100 is preferably selected to maximise the irradiation of the sample. As Figs. 3A and 3B show, the primary direction of the radiation pattern is orientated to and from the walls 113, base 123 and the sample 116.

Figs. 5A to 5D are cross-sectional side views of preferred embodiments of antenna assemblies in accordance with one aspect of the invention which can be deployed as receivers and/or transmitters in various systems and methods embodying the invention. These embodiments are applicable to all of the various operational modes and functions in accordance with the various aspects of the invention; i.e. chamber, transillumination and reflection modes and

imaging/mapping and typecasting functions. The configuration of the antenna assemblies is scalable over a wide range of dimensions for different applications.

At the front end 203 of the assembly, a focusing system is provided by a suitable lens device 204, for example of the type of a Fresnel Zone Plate (FZP) lens. The FZP lens comprises two concentric slit-ring apertures 224, 225 separated by a ring spacer 226, for example a metallic (e.g. polished brass) front-end internal reflecting ring. The main body of the assembly consists of a tube 227, preferably having a reflective metallic composition, for example polished brass or stainless steel. A back wall reflector 232 is provided in the form of a concave metallic ring (again polished brass or any other suitably reflective material may be used) which is bonded to the tube 227 and to a cathode connector 233. Through the centre of the backwall reflector 232 protrudes an anode element 230, which is preferably a narrow hollow tube element, for example comprising copper, and which is separated from the grounded cathode walls of the assembly by insulating material 231.

The diameter D_A of the anode element 230 is preferably an exact multiple of the internal diameter D_T of the tube 227. The un-insulated portion of the anode element 230 also protrudes into the interior of the tube 227 by a distance L_A which is preferably an exact multiple of the total reflecting distance L_T from the back wall reflector 232 to the front wall reflecting ring 226.

For example, an anode width of 2 mm and a tube inner diameter of 10 mm gives a ratio $D_A:D_T$ of 1:5. Ideally, the ratios between the anode diameter and the tube diameter are integers and similarly the ratios between the anode length and the tube length are integers. In this case, an anode length L_A of 19.05mm and a tube inner length L_T of 190.5 mm between the back wall internal reflector 232 and front wall internal reflector 226 gives a longitudinal standing wave ratio parameter of $L_A:L_T$ of 1:10. This balances the lateral ratio parameter $D_A:D_T$ of 1:5 to achieve optimum standing wave resonance in the tube, before the wave is launched through the aperture.

These proportions are selected to optimise resonant reflection conditions in the assembly. The resonant amplification effect and the propagation of signals through the assembly is further optimised by the appropriate selection of a dielectric cladding material 228 which substantially fills the interior of the tube 227 (and, preferably, the interior of the tube forming the anode 230, in order to maximise the effective dielectric constant of the assembly for a given dielectric material). The cladding material 228 preferably has a high dielectric constant to provide an optimum resonant amplification through the antenna assembly. The dielectric material may be a liquid or a solid or a mixture thereof. Preferably, the dielectric material comprises a powdered solid packed within the interior of the tube 227.

An anode feed wire connects the anode element connector 236 to a highly resistive (e.g. 75 Ω) lead cable 235. The back reflector 232 is grounded by connecting a ground wire from the lead cable 235 to the cathode element connector 237.

The configuration of the assembly is such that the transmitted energy radiated from the anode 230 is highly collimated within the body of the assembly. When the assembly is used as a transmitter the concentric focussing ring slits 224, 225 at the transmitting end have the effect of focussing the collimated beam exiting the assembly at a predetermined distance from the exit aperture. Depending on the configuration of the focussing ring slits, and/or the use of additional focussing elements such as dielectric lens attachments described below, the characteristics of the transmitted beam can be modified so that the focal distance of the assembly may be varied over a wide range, effectively from the exit aperture to infinity, for different applications.

Fig. 5B shows an antenna assembly similar to that of Fig. 5A, which further includes a cylindrical dielectric lens element 238 with planar end surfaces. This type of lens attachment modifies the beam leaving the assembly in a manner which depends on the distance of the outer end surface of lens attachment relative to the inherent focal distance of the main assembly, and on the refractive index and dielectric properties of the lens attachment relative to those of the dielectric

cladding material inside the assembly and relative to those of the external medium/media into which the bean is transmitted from the device. This embodiment is particularly useful when the lens surface is located at the inherent focal distance of the assembly and placed in contact with a surface under examination, acting as a spacer element for precise focussing.

Fig. 5C shows a further antenna assembly similar to that of Fig. 5A. In this case the assembly is fitted with a cylindrical plano-concave dielectric lens 239. As compared with the embodiment of Fig. 5B, this type of lens attachment further modifies the beam depending on the geometry of the concave surface, in addition to its refractive and dielectric properties. A beam emerging from the embodiment of Fig. 5A will diverge beyond the focal distance of the assembly. A plano-concave lens of this type may be configured to reduce such divergence or to re-focus the beam or to collimate the beam.

Fig. 5D shows still another antenna assembly similar to that of Fig. 5A. In this case the assembly is fitted with a cylindrical plano-convex dielectric lens 240. This type of lens attachment will have an effect opposite to that of Fig. 5B. When the assembly is used as a receiver, it will increase the capacity of the assembly to collect incident radiation.

In the embodiments of Figs. 5A to 5D, the tubular body of the assembly acts as the cathode of the antenna and the anode extends along the central longitudinal axis

of the tube. Fig. 5E shows an alternative embodiment, similar to that of Fig. 5A except that both the anode and cathode both comprise elongate, preferably tubular, elements 602, 604 located inside the outer tube 606, parallel to and arranged symmetrically about the longitudinal axis thereof. The dimensions (particularly the lengths and diameters) of the anode and cathode elements 602 and 604 are preferably proportional to the corresponding dimensions of the tube 606, as with the anode of the embodiments of Figs. 5A - 5D. Also, the spacings between the elements 602 and 604 and between the elements and the outer tube 606 are similarly in proportion.

The arrangement of the antenna elements 602 and 604 in Fig. 5E allows a pair of similar antenna assemblies to be cross polarised relative to one another since the assemblies can be rotated about their longitudinal axes such that the planes in which the elements 602 and 604 of each assembly lie can be arranged at right angles to one another.

The number and arrangement of anode and cathode elements within the antenna assemblies may be varied, as illustrated in Figs. 5F to 5N, which are schematic end views of antenna assemblies similar to those of Fig. 5E with different arrangements of elements. Figs. 5F and 5I show assemblies similar to those of Fig. 5E with one anode and one cathode element 602 and 604. In Fig. 5F, the elements are oriented at right angles to those of Fig. 5I. Figs. 5G, 5H 5J and 5K show assemblies with multiple anode and cathode elements

arranged in linear arrays along a diameter of the outer tube of the assembly, with Figs. 5G and 5H showing the arrays oriented at right angles to those of Figs. 5J and 5K. Figs. 5L to 5N show further embodiments with multiple elements arranged in cruciform arrays, the elements being located along two diameters of the tube at right angles to one another. In such embodiments, the arrangement of anodes and cathodes may vary. For example, the elements along one diameter may all be anodes and the elements along the other diameter may all be anodes, or the elements located along two adjacent radii may be anodes and the elements located along the other two radii my be cathodes, allowing different polarisations of respective assemblies. Pairs of assemblies may be oriented with the planes of their arrays disposed at relative angles other than 90°, such as 45°, so as to provide other relative polarisations. Electrical connections to the various elements may be switchable so that a single assembly may be selectively configured with different arrangements of anodes and cathodes. In all cases, the relative dimensions and spacings of the elements and the outer tube are preferably in proportion as previously described.

The various basic modes of operation of radar systems in accordance with the invention will now be described.

Figs. 6A and 6B illustrate "chamber" modes, in which a sample of material or the like is enclosed in a chamber. These embodiments operate by "transilluminating" the sample. The embodiments of

Figs 3 and 4 are also intended for chamber mode operation, but do not transilluminate the sample in the same way as the embodiments of Figs 6A and 6B.

Referring now to Fig. 6A, a cross-section of two antenna assemblies similar to those of Fig. 5E is illustrated, arranged for chamber mode operation.

The apparatus shown generally at 1 consists of a transmitter assembly 2 and a receiver assembly 3 aligned substantially coaxially with a chamber 4 provided in co-alignment therebetween.

The transmitter 2 and receiver 3 each consist of a cavity 5a and 5b respectively, for example a hollow tube or pipe. Within the tube 5a, an anode 6a and cathode 7a form a transmitting antenna 8a which is disposed in longitudinal alignment with the tube axis XX'. Within tube 5b, an anode 6b and cathode 7b form a receiving antenna 8b which is disposed in longitudinal alignment with the tube axis XX'.

Within each tube 5a,5b, the anodes 6a,6b and cathodes 7a,7b are substantially surrounded by a cladding material selected for its dielectric properties. For example, the antennae 8a,8b can be immersed in distilled water which is used as a dielectric cladding. Other alternatives include mixtures of distilled water and sand, or any other substance having the desired dielectric properties. Each tube 5a, 5b is suitably sealed at each end 12a, 13a and 12b, 13b respectively.

A suitable sealant is, for example, a resin or other electrically insulating substance,

Focusing means 9a, 9b are provided adjacent to the chamber 4. In this case, each of the focusing means 9a or 9b comprises a dielectric lens of a selected geometry and dielectric composition to enable the radiation emitted/received by the respective transmitting antenna 8a or collecting antenna 8b to be converged/diverged as it enters/exits the chamber 4 respectively. For example, in this first embodiment of the invention, the lenses 9a, 9b of the transmitter and receiver respectively are both selected to have a wax composition with a high resistivity, for example, of the order of 10^9 Megohm-meters.

The relative dimensions of each anode 6a,6b to the corresponding cathode 7a, 7b and the surrounding dielectric material and/or tube 5a,5b are determined to be fractionally proportional to each other as previously described. For example, the width of the anode 6a is proportional to the width of the cathode 7a and to the interior diameter of the tube 5a and the length of the anode 6a is proportional to the overall length of the tube 5a.

It is believed that such geometrical scaling between the antenna and the surrounding cladding, together with the dielectric properties of the cladding, assists the formation of resonant standing wave oscillations. Standing wave oscillations set up within the dielectric material contained within the transmitting tube 5 can

assist in the intensification and collimation of the emitted radiation. Under such conditions, the transmitter 2 provides a means of generating a resonant and collimated beam of radiation at selected wavelengths which the receiver 3 is capable of detecting.

The overall geometry of the transmitter 2 and receiver 3 are therefore related to the size and scale of resolution required. The dielectric properties of the cladding material selected to surround the antennas 8a, 8b are also important in this respect as these will affect the group velocity V_g of the radiation emitted/received.

In the embodiment illustrated in Fig. 6A, the transmitter 2 and receiver 3 are arranged in coaxial alignment so that the sample chamber 4 is transilluminated.

To typecast a substance by determining its spectral characteristics, other selection criteria may be used to determine suitable antenna cladding materials and the relative dimensions and overall size of the antenna assemblies. In each case the object is to ensure sufficient spectral detail is obtained at the desired resolution and scale. To ensure optimum conditions, it is preferable for the widths/lengths of the tubes 5a,5b to be integral multiples of the widths/lengths of the internal antennas 8a and 8b respectively.

Returning to Fig 6A, in this embodiment of the invention the radar equipment 1 is operated to typecast/identify a sample 10 placed within the chamber 4. The chamber 4 in this embodiment is disposed in two parts: a lower portion 4a attached to the transmitter 2 and an upper portion 4b attached to the receiver 3. The sample 10 is placed in the lower portion 4a. For example, the chamber may have an internal diameter of 40 mm and an internal depth of 40mm above the tube base.

In this embodiment, the tubes 5a,5b may each have an internal diameter of 16mm, and the chamber 4 is positioned so that the overall inner transmission length of the transmitter tube 5a and chamber portion 4a is 330mm and the overall receiver length of the receiving tube 5b and chamber portion 4b is 295mm. The measurements in each case are parallel to the direction XX' and are measured from the contact interface between the lower chamber portion 4a and the upper chamber portion 4b when the chambers contact each other in the transillumination configuration. For a required internal chamber volume, the dielectric lenses 9a, 9b are selected to optimise the convergence/divergence of radiation emitted by the antenna assemblies 2,3 and the sample chamber portion 4a is located within a maximum distance from the transmitter 2, preferably no more than 300mm.

In the embodiment illustrated in Fig. 6A, each antenna 8a, 8b may be a multi-folded YAGI array with two insulated groups containing a plurality of individually

screened high quality copper elements in the longitudinal tube plane XX'. Each array is filled with the selected dielectric material, such as distilled water in this example, to make a dielectrically clad bistatic antenna pair. The above configuration enables an optimum impedance match to be obtained at 50 ohm.

The radiation emitted by the transmitting antenna 8a is focused by means of the wax lens 9a so that the sample 10 placed in the lower portion of the chamber 4a is irradiated. Each wax lens 9a, 9b in this embodiment extends 4mm into the base of the chamber portions 4a, 4b respectively. The receiving portion of the chamber 4b is filled with a suitable dielectric, for example, air. The radiation is refocussed by the wax lens 9b into the receiving antenna assembly 2 where it is detected by the receiving antenna 8b.

In this embodiment, the size of the chamber 4 limits the size of objects to be examined: apart from this limitation a variety of substances may be typecast ranging, for example, from solid materials or composites, liquids, gases, soils, sediments or powder samples. For example, wood powders, soils, flours and oils. Both organic and non-organic substances can be typecast.

As an example, if the total volume of the sample chamber 4 is 45ml, a sample of, for example, 25ml of the substance to be typecast may be placed within the lower portion of the chamber 4a. Air occupies the

remaining 20ml volume of space inside the upper chamber portion 4b.

To ensure that stray e.m. radiation is reduced to a minimum, suitable e.m. shielding is provided. For example, by selecting a conductive, metallic substance (e.g. aluminium) to form the tubes 5a,5b and chamber portions 4a,4b and/or by further sheathing the metallic substance with a suitable insulating material (e.g. plastic). The provision of a layer of insulating material and conductive material is as is known in the art such that stray e.m. fields etc. are substantially eliminated.

The transmitter antenna assembly 2 is used to generate a resonant collimated beam of pulsed radar signals. These pulsed signals are set up and controlled by a pulse generator unit as previously described in relation to Figs. 1 and 2. In this example, the bandwidth of the transmitted pulse may be of the order of 2 MHz to 200 MHz. A large enough time window is employed to ensure that sufficient reflections have occurred within the telescopes 2, 3 and the chamber 4. For example, a time window of 16ns can be used with a pulse interval time of 100ms.

Fig. 6B shows another embodiment which is a variation of the arrangement of Fig. 6A. In Figs. 6A and 6B, like reference numerals designate like or equivalent components and features. In this embodiment, the transmitting and receiving antenna assemblies 2 and 3 are again aligned in transillumination mode, with an

enclosed chamber 4 which completely contains and conceals a sample container 400 for specimen typecasting. In this example the transmitting and receiving antenna assemblies may be similar to those of Figs. 5A and 5B. This embodiment differs from that of Fig. 6A in that interior cavities of the tubes 5a and 5b are packed with a high dielectric material, such as barium titanate, for which ε_r equals 4000 at room temperature. Within the tubes 5a, 5b, the anodes 6a, 6b are located centrally, extending along the axis X-X', and the cathodes 7a, 7b are provided by the inner walls of the tubes 5a, 5b.

The focussing means 9a, 9b preferably touch the top and bottom respectively of the sample container 400. In this case, the focussing means 9a, 9b comprises two concentric slit-ring apertures 224a, 224b, 225a and 225b, separated by a spacer 226a, 226b, as described above in relation to Fig. 5.

The chamber 4 in this case comprises two metallic solid cells 4a, 4b screwed together to form a sealed radio frequency (RF) shielded unit. The cells 4a, 4b are preferably made from non-magnetic metals, such as aluminium or brass, for example.

This arrangement of the typecasting chamber has been optimised to substantially eliminate stray electromagnetic fields.

The bandwidth of the signals received depends on the size and configuration of the antennas 8a,8b and the sample chamber 4. If the sample substance is to be typecast, its spectral characteristics are determined by subtracting the signal received from the apparatus under resonant conditions when the sample chamber 4 is empty from the signal received under similar conditions when a substance to be typecast is placed within the chamber 4. The spectral characteristics of the resultant data may then be compared with the spectral characteristics of known materials which have previously been obtained in a similar manner and stored in a database.

It is important to provide a sufficiently long time window for the radiation pattern created within the test chamber 4 to create resonant conditions within the sample (this also applies to other typecasting modes of operation as shall be described below). The transmitted radar pulse may be tuned so that the detected signal indicates that a suitable resonant radiation conditions have been established.
The second mode of operation relates to the use of antenna assemblies 200, such as those illustrated in Fig. 5, being deployed in a transillumination configuration, without the use of a sample chamber, such as that illustrated in Fig. 6B, which shows axially aligned Tx and Rx antenna assemblies 201, 202, such as those of Figs. 5A - 5N. It will be understood that transillumination modes of operation do not necessarily require the Tx and Rx antennas to be axially aligned. The antennas may be parallel or at an

angle to one another on one side of the object etc under examination, with a reflector placed behind the object so that the signal from the Tx antenna passes through the object and is reflected back to the receiver by the reflector.

As shown in Fig. 7B, the assemblies are co-axially aligned to face one another and are placed at an optimal focusing separation with a test substance/object located mid-way between the two sensors in order to achieve a balanced transillumination effect. Assemblies of this type may also be used in the arrangements illustrated in Figs 6A and 6B.

In this mode, the apparatus provides a means to image or typecast the internal composition or contents of, for example, baggage on a conveyor belt. In such an application, the antenna assemblies 201, 202 are arranged on either side of the belt to transilluminate baggage as it moves along the belt. Metallic reflectors may be further provided below the belt and around the sides/roof of any surrounding shield.

The third mode of operation relates to the antenna assemblies 200 being deployed in a parallel configuration or at an angle to one another with the apertures of the Tx and Rx antenna assemblies facing the same direction and the received signal having been deviated back towards its source direction (e.g. reflected or backscattered). Figs. 7A, 8A to 8D, 9 and 10 illustrate examples of this mode of operation. The

antenna assemblies may be deployed in a stationary configuration or one or both of the antenna assemblies may move relative to the substance/area to be scanned and/or the substance/area may be moved relative to the antenna assemblies.

For example, Fig 7A is a schematic diagram illustrating the arrangement of the receiving and transmitting antenna assemblies 201, 202 as described above, in a GPR application suitable for remotely detecting and/or imaging and/or typecasting objects and/or substances located underground. The transmitter assembly 201 and the receiver assembly 202 may be mounted on suitable land and/or sea vehicles. For example, Fig 8A illustrates how the apparatus may be mounted on to the rear or front of a land vehicle. Alternatively, the apparatus could be provided to protrude through the floor or hull of a sea-vehicle such as Fig 8D shows. Depending on the scale of the antenna assemblies, the apparatus may be highly portable for applications, such as Figs 8B and 8C illustrate. Fig 8B shows a portable device suitable for operation on land whereas Fig 8C shows a portable device suitable for submerged operation by a diver.

Fig. 9 illustrates how a transmitting antenna assembly 201 and a receiving antenna assembly 202 may be arranged in parallel along a tong 250 forming part of a submerged moveable platform 280 which can be attached, for example, to the front of a remotely operated vehicle 260 suitable for operation on a seabed 270.

Fig 10 illustrates how a plurality of pairs of arrays of transmitting antenna assemblies 201 and receiving antenna assemblies 202 may be arranged on the underside of pontoon-type supports 300a, 300b for use with a semi-submersible platform or sea-vehicle. Such a configuration of the radar apparatus enables sea-bed sensing, imaging and typecasting of materials for the oil industry.

The antenna pairs are spaced along the pontoon, preferably equidistant from adjacent antenna pairs in the array. At least one array of receiving antennas is arranged parallel to the corresponding array of paired transmitting antennas to enable wide angle reflection and refraction (WARR) sounding. At least one such antenna pair array 310a,310b and 320a,320b is provided on each pontoon, for example, two per pontoon are illustrated in Fig. 10, to form a total of eight arrays of antenna assemblies. Using this apparatus, a variety of large scale structural and compositional information may be collated from and within the seabed, for example, the apparatus may be used in such a "searching mode" to detect subterranean and seabed features.

The inventor has detected shipwrecks and the apparatus may be suitable for the detection of oil and gas deposits using this apparatus. Features such as shipwrecks may be buried deep below the seabed. Although it is possible to detect such features with a single pair of antenna assemblies over a relatively small search area, an array of antennas, and preferably

a multiple array of antennas can be used. Multiple arrays could scan many lines in one forward sweep covering a large search area in a short space of time.

Furthermore, by allowing the apparatus to remain in situ and scan a fixed area for a period of time, (i.e. to "stare" in the surveying mode) it is possible to record a series of images indicating movement of substances such as liquids (e.g. oil) and gases (e.g., natural gas seepage).

In the WARR configuration illustrated in Fig 10, the arrays provided operate in tandem. For example, the transmitting array 310a will emit signals which are reflected and recorded by the receiving array 320b, and the transmitting array 320a will emit signals which are preferably recorded by the receiving array 310b, etc. This enables a plurality of lines 330 to be scanned efficiently along the sea-bed. In the illustrated example, nine lines 330 can be scanned. In WARR mode any antenna assembly can be selected as a transmitter and reflections can be received from any receiving antenna in any specific order and sampling time to allow increasing Tx and Rx (see Fig. 10) separation for triangulation and precision mapping purposes. If this triangulation procedure is carried out, then a detailed table of dielectric properties can be produced including depths, radar velocities, interlayer thicknesses, interlayer velocities, and interlayer dielectric constants.

The sizes of the apertures of the antenna assemblies may be optimised to suit the path length and the beam collimation requirements. For deeper sounding and longer path lengths it may be necessary to vary the focusing means, for example by fitting narrow apertures with a range of optional circular slits. These can then be fitted to the telescopes to provide focusing at the optimum near/far field ranges. Dielectric lens attachments such as those illustrated in Figs. 5B to 5D may also be used for these purposes. The focusing means selection criteria follows that known in the art from radar design and selection procedures and are based on simple geometric, timing and platform speed considerations.

For field operation, typical land vehicles include ATVs, small robotic platforms, man-portable and/or hand operated or track or rail mounted for tunnels or mines, or man portable operated from raised bucket platforms for scanning vertical wall surfaces of buildings, tunnels or bridge structures. Typical sea-vehicles include inflatables, hovercraft, Dory work boats, tug-boats, hydrographic/seismic-type survey vessels, or oil-industry semi-submersible platforms with pontoons suitable for mounting large tube-arrays, or ROVs, or autonomous underwater vehicles (AUVs), or Jack-Up Platforms or Drilling Rigs or Stand-Alone Production Platforms. The antenna assemblies are typically arranged substantially vertically and are orientated so that they can stare into the ground/seabed, at depths capable of resolving oil and gas reservoir structures. In a specific example for detecting sub-seabed

substances, the antenna assemblies 201, 202 may be of the order of 24m long by 8 inches internal diameter and may comprise two 12m long by 8 inch (internal diameter) high quality steel oil tube casings welded to another two 12m by 8 inch casings to make a pair of large transmitting and receiving assemblies some 24m long. Such a geometry for the antenna assemblies is believed by the inventor to have a natural resonance which amplifies the radar signal by a factor of 180.

The apparatus may be further mounted on air/space vehicles, for example, small helicopters or remotely powered vehicles (RPVs) such as model aircraft, or balloons, blimps or piloted auto-gyros. Spaceborne platforms may be used for subsurface geological investigations of moons, comets and/or other planets.

The selection of appropriate antenna configurations and aperture sizes enables different scales to be resolved, for example, objects/substances which are underground or underwater (see for example, Figs 8C, 8D, 9 and 10).

Fig. 11A illustrates a further embodiment of the invention with a Tx antenna assembly 201 and an Rx antenna assembly mounted on a conventional optical microscope 700, for the purpose of examining, for example, biological samples mounted on microscope slides 702. The Rx assembly 202 is mounted in a socket of the microscope which would normally be occupied by an ocular (eyepiece). The end of the Rx assembly 202 may be suitably configured to fit this existing socket. The Tx assembly 201 in this example is mounted in a

socket or the like which would normally receive a light source for illuminating the slide 712. If the microscope is of the binocular type, the other ocular may be used for visual observation of the slide and for focussing the microscope. The transmitted signal from the Tx assembly 201 follows the normal optical path through the microscope to the Rx assembly 202. That is, the Tx and Rx assemblies 201, 202 are arranged for transillumination of the slide 702. Alternatively, the Tx and Rx assemblies could be mounted side by side in the ocular sockets of a binocular microscope, for reflection mode operation. In this way, a variety of different types of optical microscope may be adapted for operation as "radar microscopes" and may be used for imaging and/or typecasting of biological samples or the like in a variety of applications including medical diagnosis. For scanning purposes, the slide 702 may be translated relative to the Tx and Rx assemblies by using the conventional movable slide stage of the microscope.

For precision mapping applications of the invention, it is necessary to employ calibrated antenna assemblies, preferably of the type illustrated in Figs. 5E to 5N, whose relative separation can be varied for optimised triangulation of range distance. Preferably, the transmitting, Tx, and receiving antennas, Rx, can be rotated about their longitudinal axes through 0 - 360° relative to one another to enable variable polarisation of signals, so as to optimise coherent image reflections of targets and interfaces of interest.

The triangulation factor is important for many applications of the invention. The polarisation factor is of greatest significance for close range inspection of structures such as pipes or concrete sections. Changing the polarisation, by a factor of 90° for example, can enable the collection of multivariate image-data sets along each scan line. This often assists the classification of the medium and provides co-ordinates of point targets or structures in the medium being investigated.

The antennas can typically be oriented in two ways: plane polarised (PP or Plane Mode) or cross polarised (CP, 90° mode) where Tx is oriented at 90° to Rx or vice versa. Therefore, at any given frequency, two different sets of spectral reflection data (or digital image bands) can be collected. The design of suitable spatial frequency filters and the use of principal components analysis (PCA) for multivariate image mapping of such complex multi-spectral and multi-polarised image datasets can greatly assist in identifying, for example, engineering structures of interest for precision mapping and classification.

Consideration must also be given to the spatial (X,Y,Z) co-ordinates of both the transmitting and receiving antennas. This means that the area to be investigated should be precisely surveyed to build up a concise topographic survey database of co-ordinates for each line scanned. In cases where the scanning lines are non-linear, it is important to track the antennas on

their scanning platform during the data collection phase.

This situation may arise, for example, when scanning the irregular topographic features of a biopsy specimen, as the antennas will be mounted on a simple biopsy scanning platform (BSP) and not in direct contact with the surgical specimen. With a fixed antenna configuration on a BSP, where the tissue is irregular, the air gap between the antenna and the specimen will vary considerably. Therefore, it is important to simultaneously track the antennas during the scanning phase so that the true subject datum plane is known and can be related to precise X, Y and Z co-ordinates of the subject being investigated.

To achieve coherent imaging, it is important that the optimum scan configuration of the antennas is selected. Essentially, this is the fixed separation distance between the Tx and Rx antennas mounted on the scanning rig or BSP. For imaging of deeper structures the antennas have to be fixed with a wider separation distance. Again, for focussing through lower dielectric materials or deeper organs in the body, the antennas should be moved further apart. To acquire accurate depth data it is important to triangulate every scan line, in the body's sub-surface domain. This can be achieved by overlapping scan legs from the start of scan position (SOS) to the end of scan position (EOS). This type of scanning is commonly referred to as a WARR scan (wide angle reflection and refraction, as illustrated in Fig. 11A which shows a

fixed Tx antenna assembly 201, and a movable Rx antenna assembly 202 moving progressively away from the Tx antenna 201 in the direction of the arrows, relative to a subject 704, such as a cancer tumour within a body). This can be achieved by automatic sensor array digital switching, managed by software control.

As the scanning rig moves along the scan line, the Rx antenna assembly captures each new reflection and plots the returns alongside the previously scanned returns. This process integrates reflection traces and eventually a comprehensive image of the subject 704 is obtained. To compose a coherent image, the system processes the response reflections from the objects examined. These are automatically enhanced to optimise desired targets and layered boundary reflections may be classified.

The images may also be suitably scaled by software, with re-sampling and auto-zoom features enabling 2-D and 3-D visualisation of point targets and boundary interfaces, displayed in real time. These features, together with the use of classified colour palettes, can discriminate the textural classes or surface roughness (for example) of a wide range of materials. A typical breast carcinoma may consist of six distinct tissue layers, with layer thicknesses measured in micrometers (e.g.: 76, 76, 152, 202, 88, 77), each with a different dielectric constant.

Further analysis of the image may display dielectric tables showing mean inter-layer thicknesses, depths,

propagation velocities and dielectric constants. These tables may also include RMS error computations in two way travel time measured in nanoseconds (NS) and depth in metres (m) for each stratigraphic boundary.

The preferred signal processing software performs real-time de-convolution of the transmit pulse to allow true conformal mapping of object shapes. For example, conventional GPR reflections from circular or elliptical section structures such as pipes occur as parabolic echoes from the top and bottom of the pipe reflecting surfaces, whereas mapping in the manner described above will display the structures in their true circular or elliptical shapes.

From the resultant images, materials can be spectroscopically identified and classified (as described further below), provided they have been previously typecasted and their spectral characteristics logged in the reference database. If this is the case, classification is possible in near-real-time; that is, within a few micro-seconds of data capture. Depths can be automatically calculated by the system computer after the WARR results have been implemented. Thus, it is simply a matter of reading the depth of a required target position from the scaled image.

Fig. 12 is a table summarising system specifications for a variety of operational modes of systems embodying the invention. Fifteen modes of operation A1 - A5, B1 - B5 and C1 - C5 are indicated, exemplifying the broad

range of applications of the invention. Modes A1 - A5 are close range/near field (small scale) modes for a range of increasing distances between the Tx antenna and the subject, suitable for applications such as biological and medical imaging. Modes B1 - B5 are near to medium range (medium scale) modes, again for a range of increasing distances, suitable for typical GPR applications with relatively shallow penetration. Modes C1 - C5 are long range (large scale) modes, suitable for geological/geophysical applications, particularly in the oil industry, for relatively deep subsea/subsurface penetration. The various modes would typically use substantially the same computer, pulse generator and radar control apparatus, with different Tx and Rx antenna assemblies, these preferably being of the types illustrated in Figs. 5A to 5N, smaller assemblies (e.g. about 200 mm to 300 mm in length) being used for modes A1 to A5, intermediate size assemblies being used for modes B1 to B5, and larger size assemblies (e.g. up to about 24 m in length) being used for modes C1 to C5.

The resolution time and resolution space (columns 2 and 3) indicate the resolution which may be obtained using each mode. Values given are for salt water and may be converted for other media with different dielectric properties. Column 4 indicates suitable values of the Pulse Repetition Frequency (PRF) for each mode, being higher for close range applications and lower for longer range applications. Column 4 indicates suitable Pulse Width (Pw) values for the various modes, these being shorter for close range modes and longer for long

range modes. For each of modes A1 - A5, suitable values are in the range 10 - 100 ps (picoseconds) i.e. 0.01 to 0.1 ns (nanoseconds); for each of modes B1 - B5, suitable values are in the range 1 - 10 ns; for each of modes C1 - C5, suitable values are in the range 10 to 25 ns. The table of Fig. 12 utilises Pw values of 0.1 ns for modes A1 - A5, 1 ns for modes B1 - B5 and 10 ns for modes C1 - C5. Column 6 indicates the Time Range (TR) in the received signal produced by each transmitted pulse which will contain data of interest at the relevant distance and scale. The Time Range would normally begin with the first peak of the received signal. The Time Range is shorter for close range/small scale applications and longer for long range/large scale applications.

Columns 6 and 7 indicate the preferred frequency ranges (Fmin to Fmax) of the transmitted pulse for each mode, being higher for close range/small scale applications requiring little penetration and high resolution and lower for long range/large scale applications requiring deep penetration and lower resolution. The frequency range is determined by the radar system as a whole, including the characteristics of the TX and Rx antennas. Columns 9 to 11 indicate suitable values of pulses-per-trace (Ptr), scan rate (SR, traces-per-second) and Sdelay (1/SR)for the purposes of sampling, storing and displaying digitised data.

The total frequency range of the radar systems is indicated as 1 MHz to 10 GHz, which covers an exceptionally wide range of frequencies. This range is

suited for the various imaging and typecasting operations of the apparatus at various distances and scales. For each of the fifteen modes, the sampling rate (Fs) most preferably equals two times the maximum frequency (Fmax) as indicated in column 7 of Fig. 12B. The sampling rate is determined by the difference in time delays from pulse to pulse. For all modes of operation, the sampling rate preferably falls in the range Fmax/4 to 4Fmax. The sampling time, Ts (column 12), is different from the sampling rate, being the time during which the analogue signal is sampled before being digitised, corresponding to the time represented by one pixel in the y-direction. Preferably, on average, the sampling time Ts is 1/(2Fmax). It should be at least 1/Fmax but for fast scanning it is recommended to be 1/(4Fmax) which equates to 0.25 ns where Fmax = 1 GHz.

It is important that the analogue input signal is filtered before sampling to avoid aliasing. This is partially accomplished by the sampler 516 (Fig. 2) which averages the signal over the sampling time. The lower frequency range is limited by the Tx and Rx antennas, the time window and a low frequency component from the radar. The lowest frequency that can be resolved is the reciprocal of the time from time zero to the end of the trace. For example, consider mode A5 of Fig. 12. In this case, the 25 ns time range (column 6) will have a minimum frequency of $(25\ \text{ns})^{-1}$, i.e. 40 MHz. This is an absolute minimum value. For practical purposes, a higher value (100 MHz in Fig. 12) is preferably selected.

Modes A1 to A5 are intended for close range or near field imaging and typecasting such as in medical and biological applications. The recommended frequency ranges for these modes of operation is from a minimum frequency (Fmin) in the range 100 MHz (A5) to 1 GHz (A1) to a maximum frequency in the range 1 GHz (A5) to 10 GHz (A1). For these frequency ranges, the sampling rate (Fs) is determined by the difference in time delays from pulse to pulse. As noted above, the criterion for selecting Fs is that it should be at least two times Fmax for most applications, or preferably four times Fmax for some specific applications such as fast scanning. The preferred overall range for all modes is Fmax/4 to 4Fmax.

The pulse repetition frequency (PRF) is the rate at which pulses are emitted from the transmitter. For close range (focussed near field imaging) medical and biological applications, PRF should be at least 64 kHz for combined imaging and typecasting applications, but the preferred maximum value is 100 kHz.

The number of pulses per trace (Ptr, column 9, Fig. 12B) is important for efficient operation of the apparatus. The preferred maximum Ptr for modes A1 - A5, to cover a wide range of diagnostic medical, biological and biochemical applications, is 100 pulses per trace. The maximum time window, TR, is a function Ptr and Ts, as follows: TR = (Ptr x Ts). Accordingly, in mode A3 operation: Ts = 1/2Fmax; i.e. Ts = 10^{-10} = 0.1 ns; TR = (100 x 0.1)ns = 10 ns.

There is a trade off between parameters for optimum imaging and typecasting performance. Higher values of Fmax always give better results in terms of resolution etc. but at the expense of penetration, data processing etc.

Modes B1 - B5 relate to near range to medium range (focused subsurface imaging) general ground penetrating radar (GPR) applications. For these modes, the preferred value of PRF is also 100 kHz. The optimum range of Ptr to cover this range of applications is 4000 to 9600 pulses per trace.

Modes C1 - C5 relate to medium range to long range (far field) applications. For many far field geological applications, a most appropriate time range would be of the order of 20000 to 80000 ns. For deep geological applications (i.e. shallow seismic to deep seismic type depths up to thousands of metres), the time ranges of the order of 160000 to 250000 ns may be selected.

Stacking the pulse (St) is a common method of enhancing the imaged products in conventional geophysical or seismic imaging. This technique can be applied in the present system at the time of data collection (through digital control) or it can be carried out externally by post-processing of the collected radar imagery. In the latter case, then the data collection rate is preferably increased.

The scanning rate (SR) equals the number of traces (or scans) per second. The maximum value of SR equals PRF divided by the product of Ptr and St. For example (mode A1), where Ptr equals 40, PRF equals 100 kHz and St equals 1 (no stacking), then SR = $(100 \times 10^3)/(40 \times 1)$ = 2500 scans per second.

With reference to the setting up of the radar system for operational use, the time zero (T_0) position is of particular importance. T_0 will generally be selected as appropriate for a particular application, to ensure that all of the relevant received signal data is retrieved. In general terms T_0 is the time at which the transmitted pulse is received by the shortest transmission path between the transmitter and the receiver (the "direct wave", e.g. transmitted through air in an air medium or through water in a water medium). The required T_0 position is not actually the zero point on the time scale because the pulse has travelled from the transmitter unit to the receiver unit, so the T_0 position actually corresponds to the distance between the transmitter antenna and the receiver antenna divided by the speed of the pulse. This factor is important for obtaining accurate depth measurements through materials, especially those with multivariate dielectric constants and inter-layer velocities. It is important that the T_0 position is included in the time window range (TR, column 6, Fig. 12) or in the displayed image on the visual display unit of the computer. The direct wave received pulse can be used to de-convolve the image. This will generally produce a less cluttered image; i.e. objects

such as circular section pipes will appear circular rather than as parabolic reflections of the top and bottom of the pipe.

The position of T_0 in the image depends on the various delays in the radar system and is preferably set up when the radar is first switched on, before any other settings are altered.

The foregoing discussion, referring to Fig. 12 of the drawings, applies particularly to transillumination and reflection modes of operation.

To set up appropriate conditions in order to typecast material in chamber mode operation (as illustrated in Fig. 6A), the following technique may be used when using a conventional GPR radar set (or equivalent) as the pulse generator. To provide optimum control during the set up procedure, the best method found by the inventor is to switch off the Automatic Gain Control and the Time Varying Gain Control of the pulse generator 21 (Fig. 1). A reasonable received signal bandwidth is then established by suitable selection of the cut-off frequencies of a high-pass filter and low-pass filter; for example, between 40 Hz and 3.2 kHz.

A large enough time window is selected for sampling to allow a sufficient number of resonant ringing reflections through the scanned substance/object to have occurred to enable significant spectral relationships for each sampled substance to be established. The inventor has found that in the case

where a 25ml sample was placed in the chamber portion 4a (Fig. 6A), and 20ml of air was left in the sample chamber portion 4b, that a suitable time window was approximately 16ns. Increasing the minimum time window to, for example, 25ns, further enables sufficient resonant effects to be established and tested. The sampling interval, or scan rate, is selected to allow a sufficient pulse dwell time to enable resonance through the sampled substance to be optimised. In this example, sampling was optimised with a sampling interval of 100ms (10 scans per second) to ensure that consistent results were obtained on repetitive tests. In general, as a lower limit, the sampling interval should not be less than 50ms; i.e. the scan rate should not exceed 20 scans per second. However, for certain fast scanning applications, it is possible to scan at 200 scans per second and it is also possible for typecasting to be performed at this rate.

The data obtained using the apparatus, systems and methods as described thus far may be used for a variety of purposes, including imaging, mapping, dimensional measurement, and typecasting (identification of materials etc.).

The time domain data as received by the receiver may be processed for imaging/mapping/measurement purposes using well known techniques employed in conventional GPR and other imaging/mapping applications, which will not be described herein.

The time domain data may be transformed into frequency domain data, by means of Fourier Transform techniques (especially FFT). This provides an energy/frequency spectrum which, in accordance with one aspect of the invention, may be used as a unique signature to identify (typecast) the material which produced the spectrum. In accordance with this aspect of the invention, the energy/frequency spectrum is analysed using any of a variety of well known statistical analysis methods (such as principal components analysis, maximum likelihood classification or multivariate classification) or combinations of such methods, in order to obtain a parameter set. A reference database of known materials is established, comprising the original time domain data, and/or the transformed data, and/or the parameter set obtained therefrom, and an unknown material can thereafter be identified by comparing its parameter set, also obtained by means of the apparatus, systems and methods of the present invention, with those in the reference database. The statistical analysis of the energy/frequency spectrum may be performed either by frequency classification (using energy bins) or by energy classification (using frequency bins).

Conventional analytical methods may also be applied to the data for classification purposes, such as time domain reflectrometry techniques, velocity distribution analysis or the like, as used in conventional geophysical applications for determining dielectric properties.

The computer forming part of the radar system in accordance with the invention may be programmed to perform these functions.

By use of the invention, it is possible to classify and map oil, water and gas reserves deep underground without the need for drilling. By staring deep underground, it is possible to monitor oil, water and gas movements and to classify oils already typecast and held in reference databases of oil types etc.

Other applications include the detection of explosives, contraband substances, and in particular narcotics, as well as the typecasting of rock, soil, sediment and ice cores, and biological/medical imaging and diagnosis.

The preferred antenna assemblies of the present invention (Figs. 5A to 5N) are believed to operate in a manner analogous to a laser, except that radio waves are resonated in a highly dielectric medium and with a carefully selected dielectric medium and with a carefully selected dielectric lens aperture with concentric circular focusing slits. With a 3mm aperture, it is possible to focus the beam from 3mm outside the central aperture to infinity, like a pin-hole camera.

An example image obtained by means of the invention is shown in Fig 11. The image represents a scan of a short cylindrical core of gold in a quartzite seam indicated at A. The width of this short scanned

portion is 280mm and the diameter of the gold core is approximately 40mm.

The vertical dimension reflects the time domain and the horizontal scale has been rectified to represent the length of the core scanned by the moving antenna pair. The top of the image is 0ns. Further time delays represent signals reflected from deeper within the sample core. Looking down through the core reflections are recorded to about 5.4ns. Two further harmonic reflections are provided which provide information on surface roughness of the core and arise from too much initial power being used to generate the radar pulse. The first reflection lies from approximately 7ns to 13ns in time range and the second multiple surface reflection shows an enlarged portion of the core from 17ns to 25ns, the limit of the 25ns time window selected.

The selection of appropriate circular slit apertures 224,225 and ring spacings 226 and the choice of dielectric filler 228 which launches the wave enables the internal structure of the core to be perceived. If the anode length is proportional to the tube length as previously described, for example $1/\alpha$ or in this case 1/10th of the total internal telescope tube 227 length, then the time delay of the radar beam (i.e., the time from emission to detection) is multiplied by the reciprocal α of the fraction $1/\alpha$; i.e., the actual time delay $T_D = \alpha \times$ the expected time delay T_E, where T_E is as is given in conventional ground penetrating radar

(GPR) formulae. Using the conventional GPR Range Formulae, this 40 mm core of quartzite with a mean dielectric constant ($\varepsilon_R = 5$) should have produced an equivalent time range length on the image of 0.54ns, but the 10:1 factor stretched the time range because the beam was slowed down in the telescope and this resulted in a time range image spanning 5.4ns. This is considered by the inventor to be a tube geometry and dielectric lens effect, and will assist in the near range focusing of radio-wave cameras and microscopes as well as radio-wave telescopes for mapping deep below ground level or the sea-bed.

The above description relates to particular embodiments of the invention. In general, the values or ranges of values indicated for various parameters may all vary and may be dependent on the particular application of the invention.

Furthermore, if the dielectric properties of the cladding material surrounding the antenna of the telescopes vary under given conditions, for example if the dielectric constant is thermally dependent, such as is the case with barium titanate, then it is possible to detect such conditions by using the invention to "stare" at the substance and monitoring the change in the received spectral data. This could enable the thermal conditions of subterranean structures/substances/objects to be determined. Other dielectrics of interest include lead zirconate titanate (PZT) and ammonium dihydrogen phosphate.

For the removal of doubt, wherever specific reference has been made to a "substance", "sample" or the like, the term may be taken to include other objects, liquids and powders as well as larger or smaller scale geological, marine or biological features etc. The term "subject" as used herein means any such substance, sample, object, feature etc. to be imaged, detected or analysed by means of the invention.

It will be understood that for certain applications of the invention, the transmitting and receiving antennas, antenna arrays or antenna assemblies may be combined in transceiver arrays or assemblies.

While several embodiments of the present invention have been described and illustrated, it will be apparent to those skilled in the art once given this disclosure that various modifications, changes, improvements and variations may be made without departing from the spirit or scope of this invention.

Claims

1. A radar antenna assembly for use as a transmitter, receiver or transceiver comprising:

a tubular casing having a radar-reflective inner surface and having a first end, a second end and a longitudinal axis;

a radar-reflective reflector closing said first end;

an aperture disposed at said second end;

at least one elongate antenna element extending substantially parallel to said longitudinal axis from said reflector towards said second end; and

dielectric material substantially filling the interior volume of said tubular casing.

2. A radar antenna assembly as claimed in Claim 1, further including focussing means at said second end.

3. A radar antenna assembly as claimed in Claim 2, wherein said focussing means includes a plurality of concentric slit ring apertures located at said second end.

4. A radar antenna assembly as claimed in Claim 2 or Claim 3, wherein said focussing means includes at least one dielectric lens element located at said second end.

5. A radar antenna assembly as claimed in Claim 4, wherein said dielectric lens element comprises a planar lens element.

6. A radar antenna assembly as claimed in Claim 4, wherein said dielectric lens element comprises a plano-concave lens element.

7. A radar antenna assembly as claimed in Claim 4, wherein said dielectric lens element comprises a plano-convex lens element.

8. A radar antenna assembly as claimed in any preceding Claim, wherein said tubular casing has an inner diameter D_T of which is an integer multiple of the diameter D_A of said at least one antenna element.

9. A radar antenna assembly as claimed in any preceding Claim, wherein said tubular casing has an interior length L_T which is an integer multiple of the length L_A of said at least one antenna element.

10. A radar antenna assembly as claimed in any preceding Claim, wherein an interior surface of said tubular casing comprises an antenna cathode and said elongate antenna element comprises an antenna anode.

11. A radar antenna assembly as claimed in Claim 10, wherein said elongate antenna element extends along said longitudinal axis.

12. A radar antenna assembly as claimed in any one of Claims 1 to 9, including at least two of said elongate antenna elements, at least one of which comprises an antenna cathode and at least one of which comprises an antenna anode.

13. A radar antenna assembly as claimed in Claim 12, wherein said elongate antenna elements are disposed symmetrically about the longitudinal axis of the tubular casing.

14. A radar antenna assembly as claimed in Claim 13, wherein said elongate antenna elements have substantially equal lengths and diameters.

15. A radar antenna assembly as claimed in Claim 14, wherein the interior diameter D_T of the tubular casing is an integer multiple of the diameter D_A of said elongate antenna elements and of the spacing between adjacent pairs of said elongate antenna elements.

16. A radar antenna assembly as claimed in any preceding Claim, wherein said dielectric material is a liquid.

17. A radar antenna assembly as claimed in any preceding Claim, wherein said dielectric material is a solid.

18. A radar antenna assembly as claimed in any preceding Claim, wherein said dielectric material is a powdered solid packed into the interior of said tubular casing.

19. A radar antenna assembly comprising a closed chamber adapted to contain a sample of material, said chamber including four substantially triangular side

walls together defining an open-based pyramidal structure, said assembly including transmitter antenna elements disposed on interior surfaces of a first opposed pair of said triangular side walls and receiver antenna elements disposed on interior surfaces of a second opposed pair of said triangular side walls.

20. A radar antenna assembly as claimed in Claim 19, wherein said antenna elements comprise bowtie dipole antennas with respective cathode and anode elements disposed on said opposed pairs of said triangular side walls.

21. A radar antenna apparatus as claimed in Claim 19 or Claim 20, wherein the base of said pyramidal structure is closed by a generally planar base wall, said chamber comprising the interior volume of said pyramidal structure.

22. A radar antenna assembly as claimed in Claim 19 or Claim 20, wherein said chamber comprises a closed volume communicating with the open base of said pyramidal structure.

23. A radar system comprising pulsed signal generating means, transmitter antenna means, receiver antenna means, control means for controlling the operation of said pulsed signal generating means, analog-digital converter means for digitising signals received by said receiver antenna means, and data storage means for storing said digitised signals, wherein said transmitter antenna means and receiver antenna means

comprise at least one radar antenna assembly as claimed in any one of Claims 1 to 22.

24. A radar system as claimed in Claim 23, wherein said transmitter antenna means comprises at least one transmitter radar antenna assembly as claimed in any one of Claims 1 to 18, and said receiver antenna means comprises at least one receiver radar antenna assembly as claimed in any one of Claims 1 to 19.

25. A radar system as claimed in Claim 24, wherein said transmitter and receiver antenna assemblies are disposed so as to transilluminate a subject.

26. A radar system as claimed in Claim 24, wherein said transmitter and receiver antenna assemblies are disposed so as to be co-axially aligned on opposite sides of a subject.

27. A radar system as claimed in any one of Claims 24 to 26, wherein said transmitter and receiver antenna assemblies are connected to a closed sample chamber adapted to enclose a subject.

28. A radar system as claimed in Claim 24, wherein said transmitter and receiver antenna assemblies are disposed such that said receiver antenna assembly receives a signal transmitted by said transmitter antenna assembly and reflected from a subject.

29. A radar system as claimed in Claim 28, wherein said transmitter and receiver antenna assemblies are

arranged such that their longitudinal axes are substantially parallel to one another with their second ends facing in the same direction.

30. A radar system as claimed in Claim 28 or 29, wherein said system is adapted to be portable.

31. A radar system as claimed in Claim 28 or Claim 29, wherein said system is adapted to be carried by a land vehicle.

32. A radar system as claimed in Claim 28 or Claim 29, wherein said system is adapted to be carried by a water-borne vessel.

33. A radar system as claimed in Claim 28 or Claim 29, wherein said system is adapted to be carried by a submersible vehicle.

34. A radar system as claimed in Claim 28 or Claim 29, wherein said system is adapted to be carried by an airborne vehicle.

35. A radar system as claimed in Claim 28 or 29, wherein said system is adapted to be carried by a space vehicle.

36. A radar system as claimed in Claim 28 or Claim 29, wherein the position of said transmitter antenna assembly is fixed relative to said receiver antenna assembly.

37. A radar system as claimed in Claim 28 or Claim 29, wherein at least one of said transmitter antenna assembly and said second antenna assembly is adapted to be movable relative to a subject.

38. A radar system as claimed in Claim 28 or Claim 29 in which one of said transmitter and receiver antenna assemblies is adapted to be movable relative to the other.

39. A radar system as claimed in any one of Claims 28 to 38, including a plurality of transmitter antenna assemblies.

40. A radar system as claimed in any one of Claims 28 to 39, including a plurality of receiver antenna assemblies.

41. A radar system as claimed in any one of Claims 28 to 40, for use with close range subjects, in which said control means is adapted to control said pulsed signal generating means so as to generate pulses with a pulse repetition frequency of the order of 100 kHz.

42. A radar system as claimed in any one of Claims 28 to 41, for use with close range subjects, in which said control means is adapted to control said pulsed signal generating means so as to generate pulses with a pulse width in the range 0.01 to 0.1 nanoseconds.

43. A radar system as claimed in any one of Claims 28 to 42, for use with close range subjects, adapted to capture data in a time range of 2 to 25 nanoseconds.

44. A radar system as claimed in any one of Claims 28 to 43, for use with close range subjects, adapted to transmit pulses with a minimum frequency in the range 100 to 1000 MHz and with a maximum frequency in the range 1000 to 10000 MHz.

45. A radar system as claimed in any one of Claims 28 to 40, for use with close to medium range subjects, in which said control means is adapted to control said pulsed signal generating means so as to generate pulses with a pulse repetition frequency of the order of 25 to 100 kHz.

46. A radar system as claimed in any one of Claims 28 to 40 or 45, for use with close to medium range subjects, in which said control means is adapted to control said pulsed signal generating means so as to generate pulses with a pulse width in the range 1 to 10 nanoseconds.

47. A radar system as claimed in any one of Claims 28 to 40, or 45 or 46, for use with close to medium range subjects, adapted to capture data in a time range of 2000 to 10000 nanoseconds.

48. A radar system as claimed in any one of Claims 28 to 40, or 45 to 47, for use with close to medium range subjects, adapted to transmit pulses with a minimum

frequency in the range 12.5 to 125 MHz and with a maximum frequency in the range 200 to 2000 MHz.

49. A radar system as claimed in any one of Claims 28 to 40, for use with long range subjects, in which said control means is adapted to control said pulsed signal generating means so as to generate pulses with a pulse repetition frequency of the order of 3.125 to 50 kHz.

50. A radar system as claimed in any one of Claims 28 to 40 or 49, for use with long range subjects, in which said control means is adapted to control said pulsed signal generating means so as to generate pulses with a pulse width in the range 10 to 25 nanoseconds.

51. A radar system as claimed in any one of Claims 28 to 40, or 49 or 50, for use with long range subjects, adapted to capture data in a time range of 20000 to 250000 nanoseconds.

52. A radar system as claimed in any one of Claims 28 to 40, or 49 to 51, for use with long range subjects, adapted to transmit pulses with a minimum frequency in the range 1 to 12.5 MHz and with a maximum frequency in the range 12.5 to 200 MHz.

53. A radar system as claimed in any one of Claims 23 to 52, further including data processing means for processing said digitised signals.

54. A radar system as claimed in Claim 53, wherein said data processing means is adapted to process said

digitised signals for the purposes of at least one of imaging, measuring, mapping, detecting, identifying and typecasting said subject.

55. A method of typecasting a subject comprising the steps of:

irradiating the subject with a pulsed, broad band radar frequency signal transmitted by at least one transmitter antenna;

detecting a return signal following interaction of said transmitted signal with said subject, using at least one receiver antenna;

calculating an energy-frequency spectrum of said return signal; and

analysing said energy-frequency spectrum to obtain a characteristic energy-frequency signature of said subject.

56. A method as claimed in Claim 55, wherein said step of analysing said energy-frequency spectrum comprises performing a statistical analysis of said energy frequency spectrum.

57. A method as claimed in Claim 56, wherein said statistical analysis includes at least one of principal components analysis, maximum likelihood classification and multivariate classification.

58. A method as claimed in any one of Claims 55 to 57, wherein said step of analysing said energy-frequency spectrum comprises frequency classification using energy bins.

59. A method as claimed in any one of Claims 55 to 57, wherein said step of analysing said energy-frequency spectrum comprises energy classification using frequency bins.

60. A method of identifying an unknown subject comprising the steps of:

obtaining an energy-frequency signature of said subject using the method of any one of Claims 55 to 59; and

comparing said energy-frequency signature of the unknown subject to a database of energy-frequency signatures of known subjects previously obtained using the method of any one of Claims 55 to 59.

61. A method as claimed in any one of Claims 55 to 60, implemented using a radar system as claimed in Claim 53 or 54.

62. A radar system as claimed in Claim 53 or 54, wherein said data processing means is adapted to perform the method of any of Claims 55 to 60.

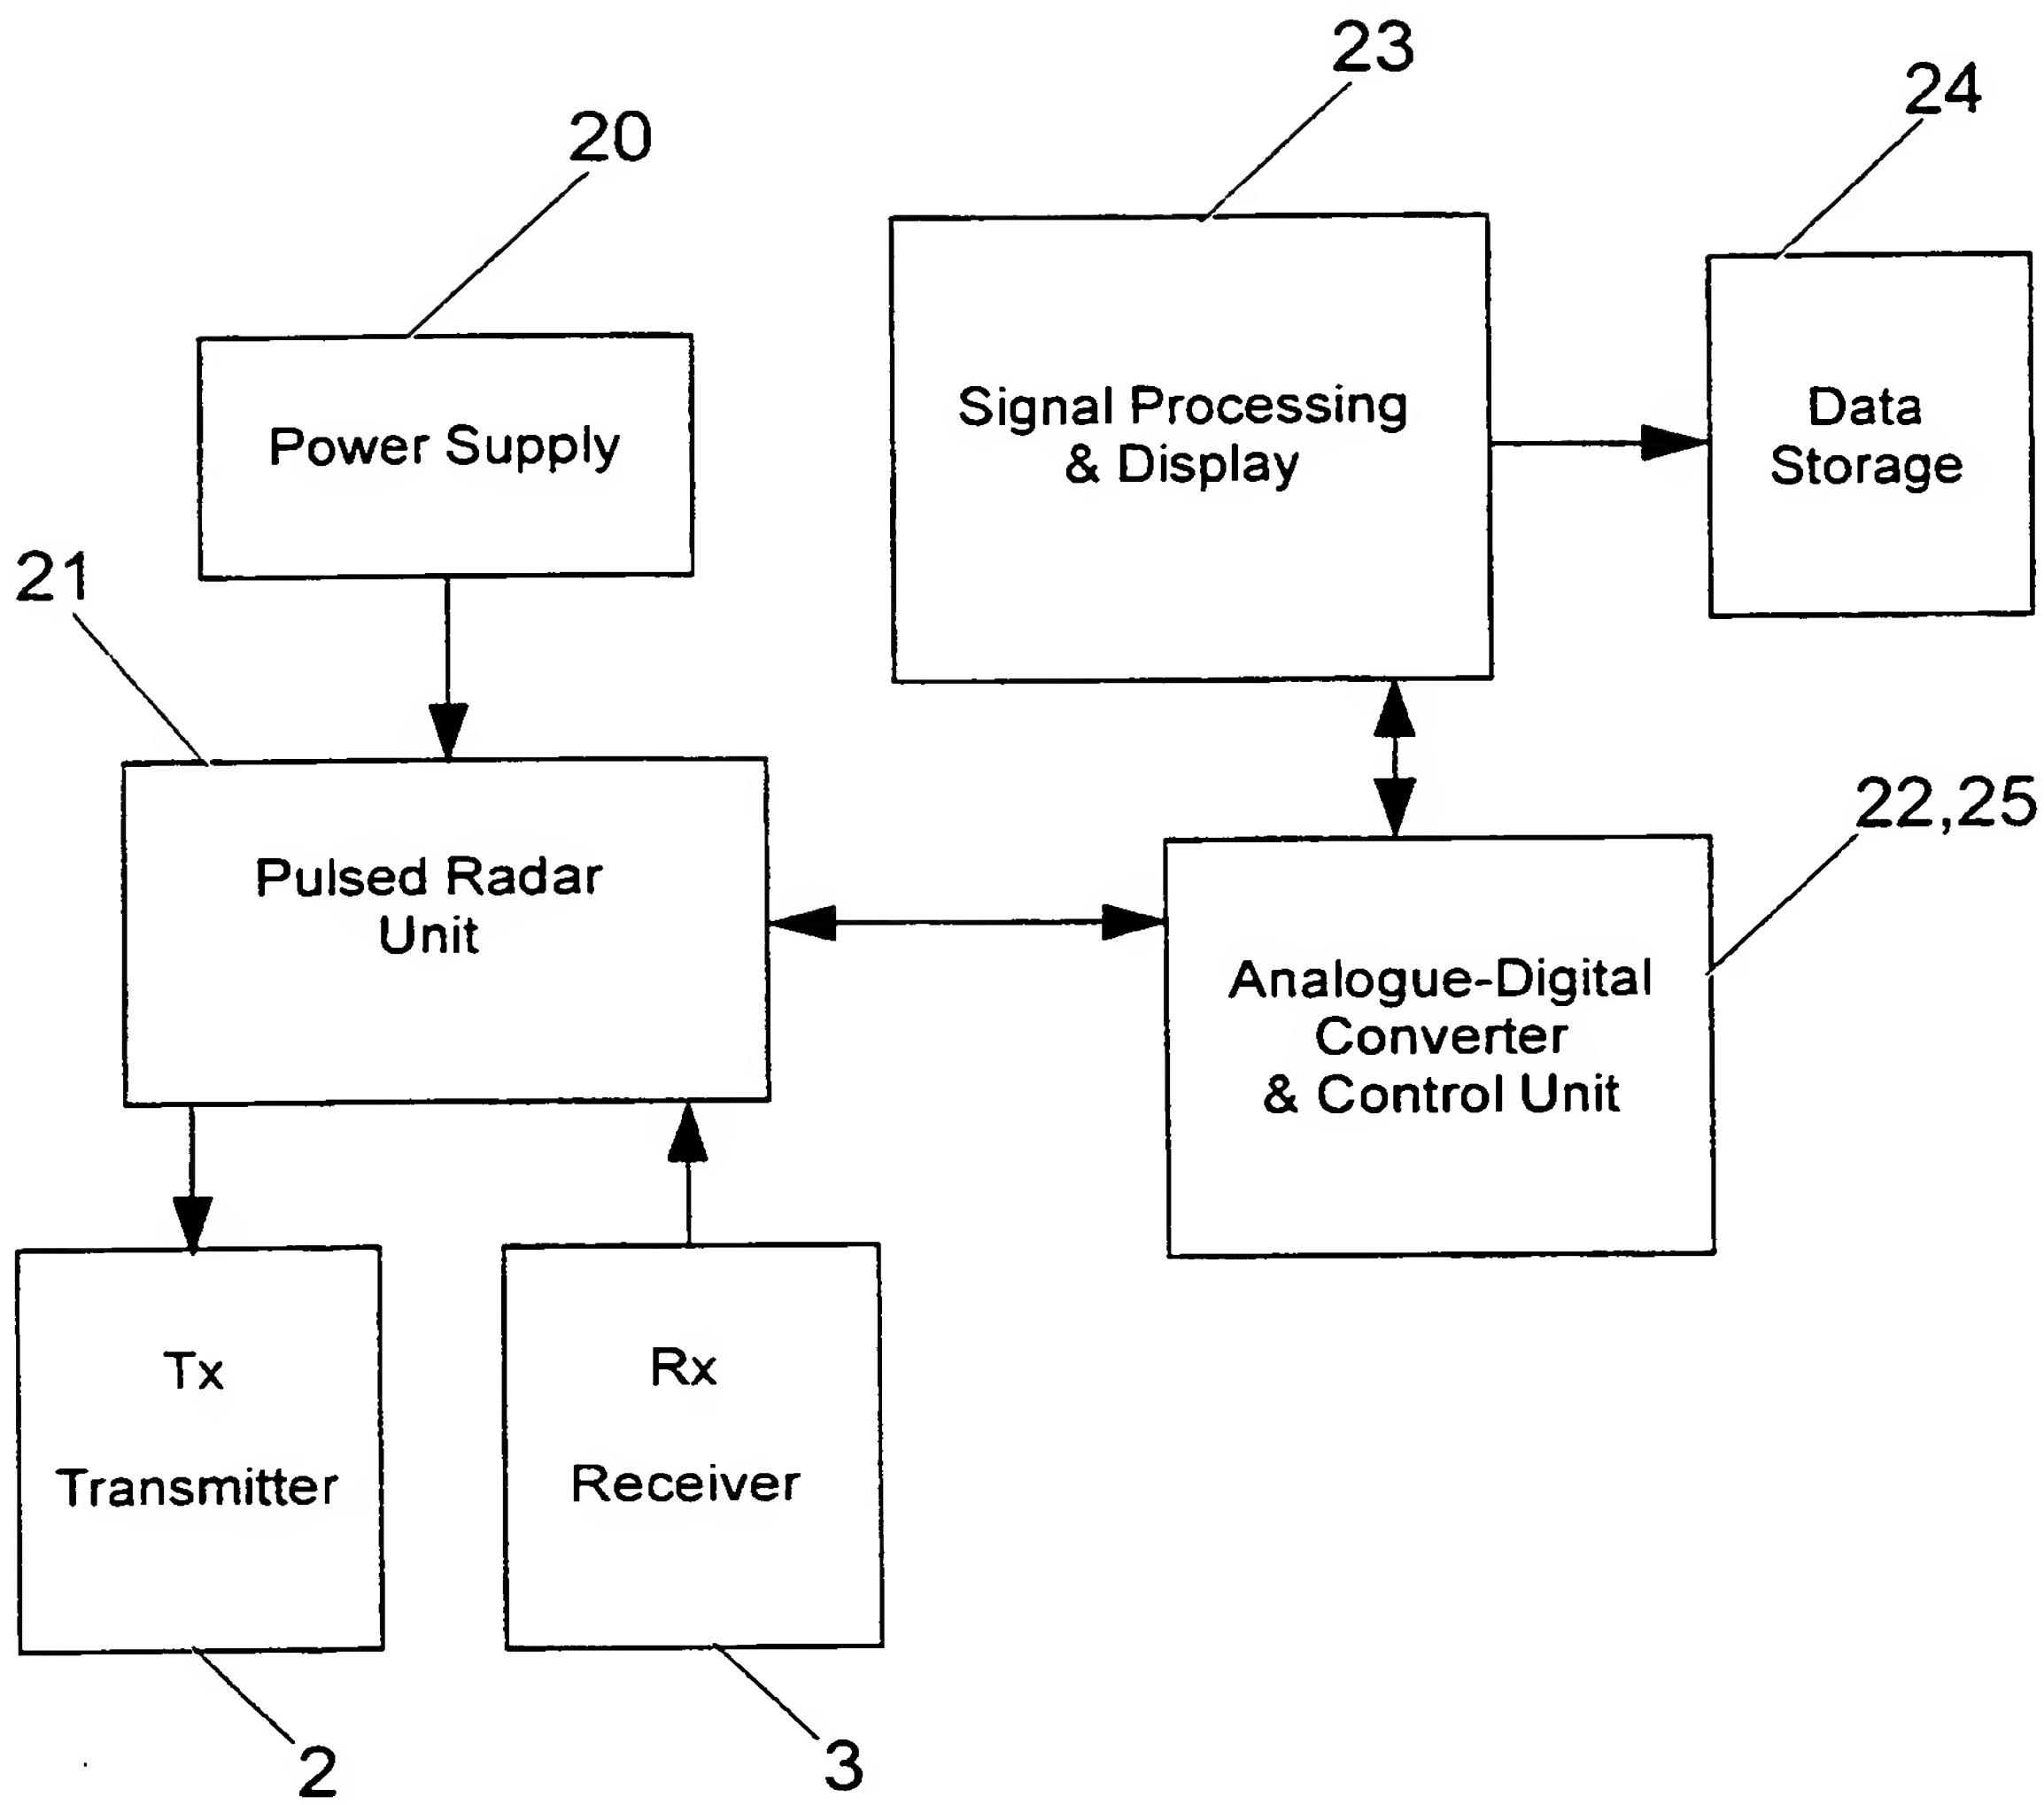

20
Power Supply
21
Pulsed Radar Unit
23
Signal Processing & Display
24
Data Storage
22,25
Analogue-Digital Converter & Control Unit
Tx
Transmitter
Rx
Receiver
2
3

Fig. 1

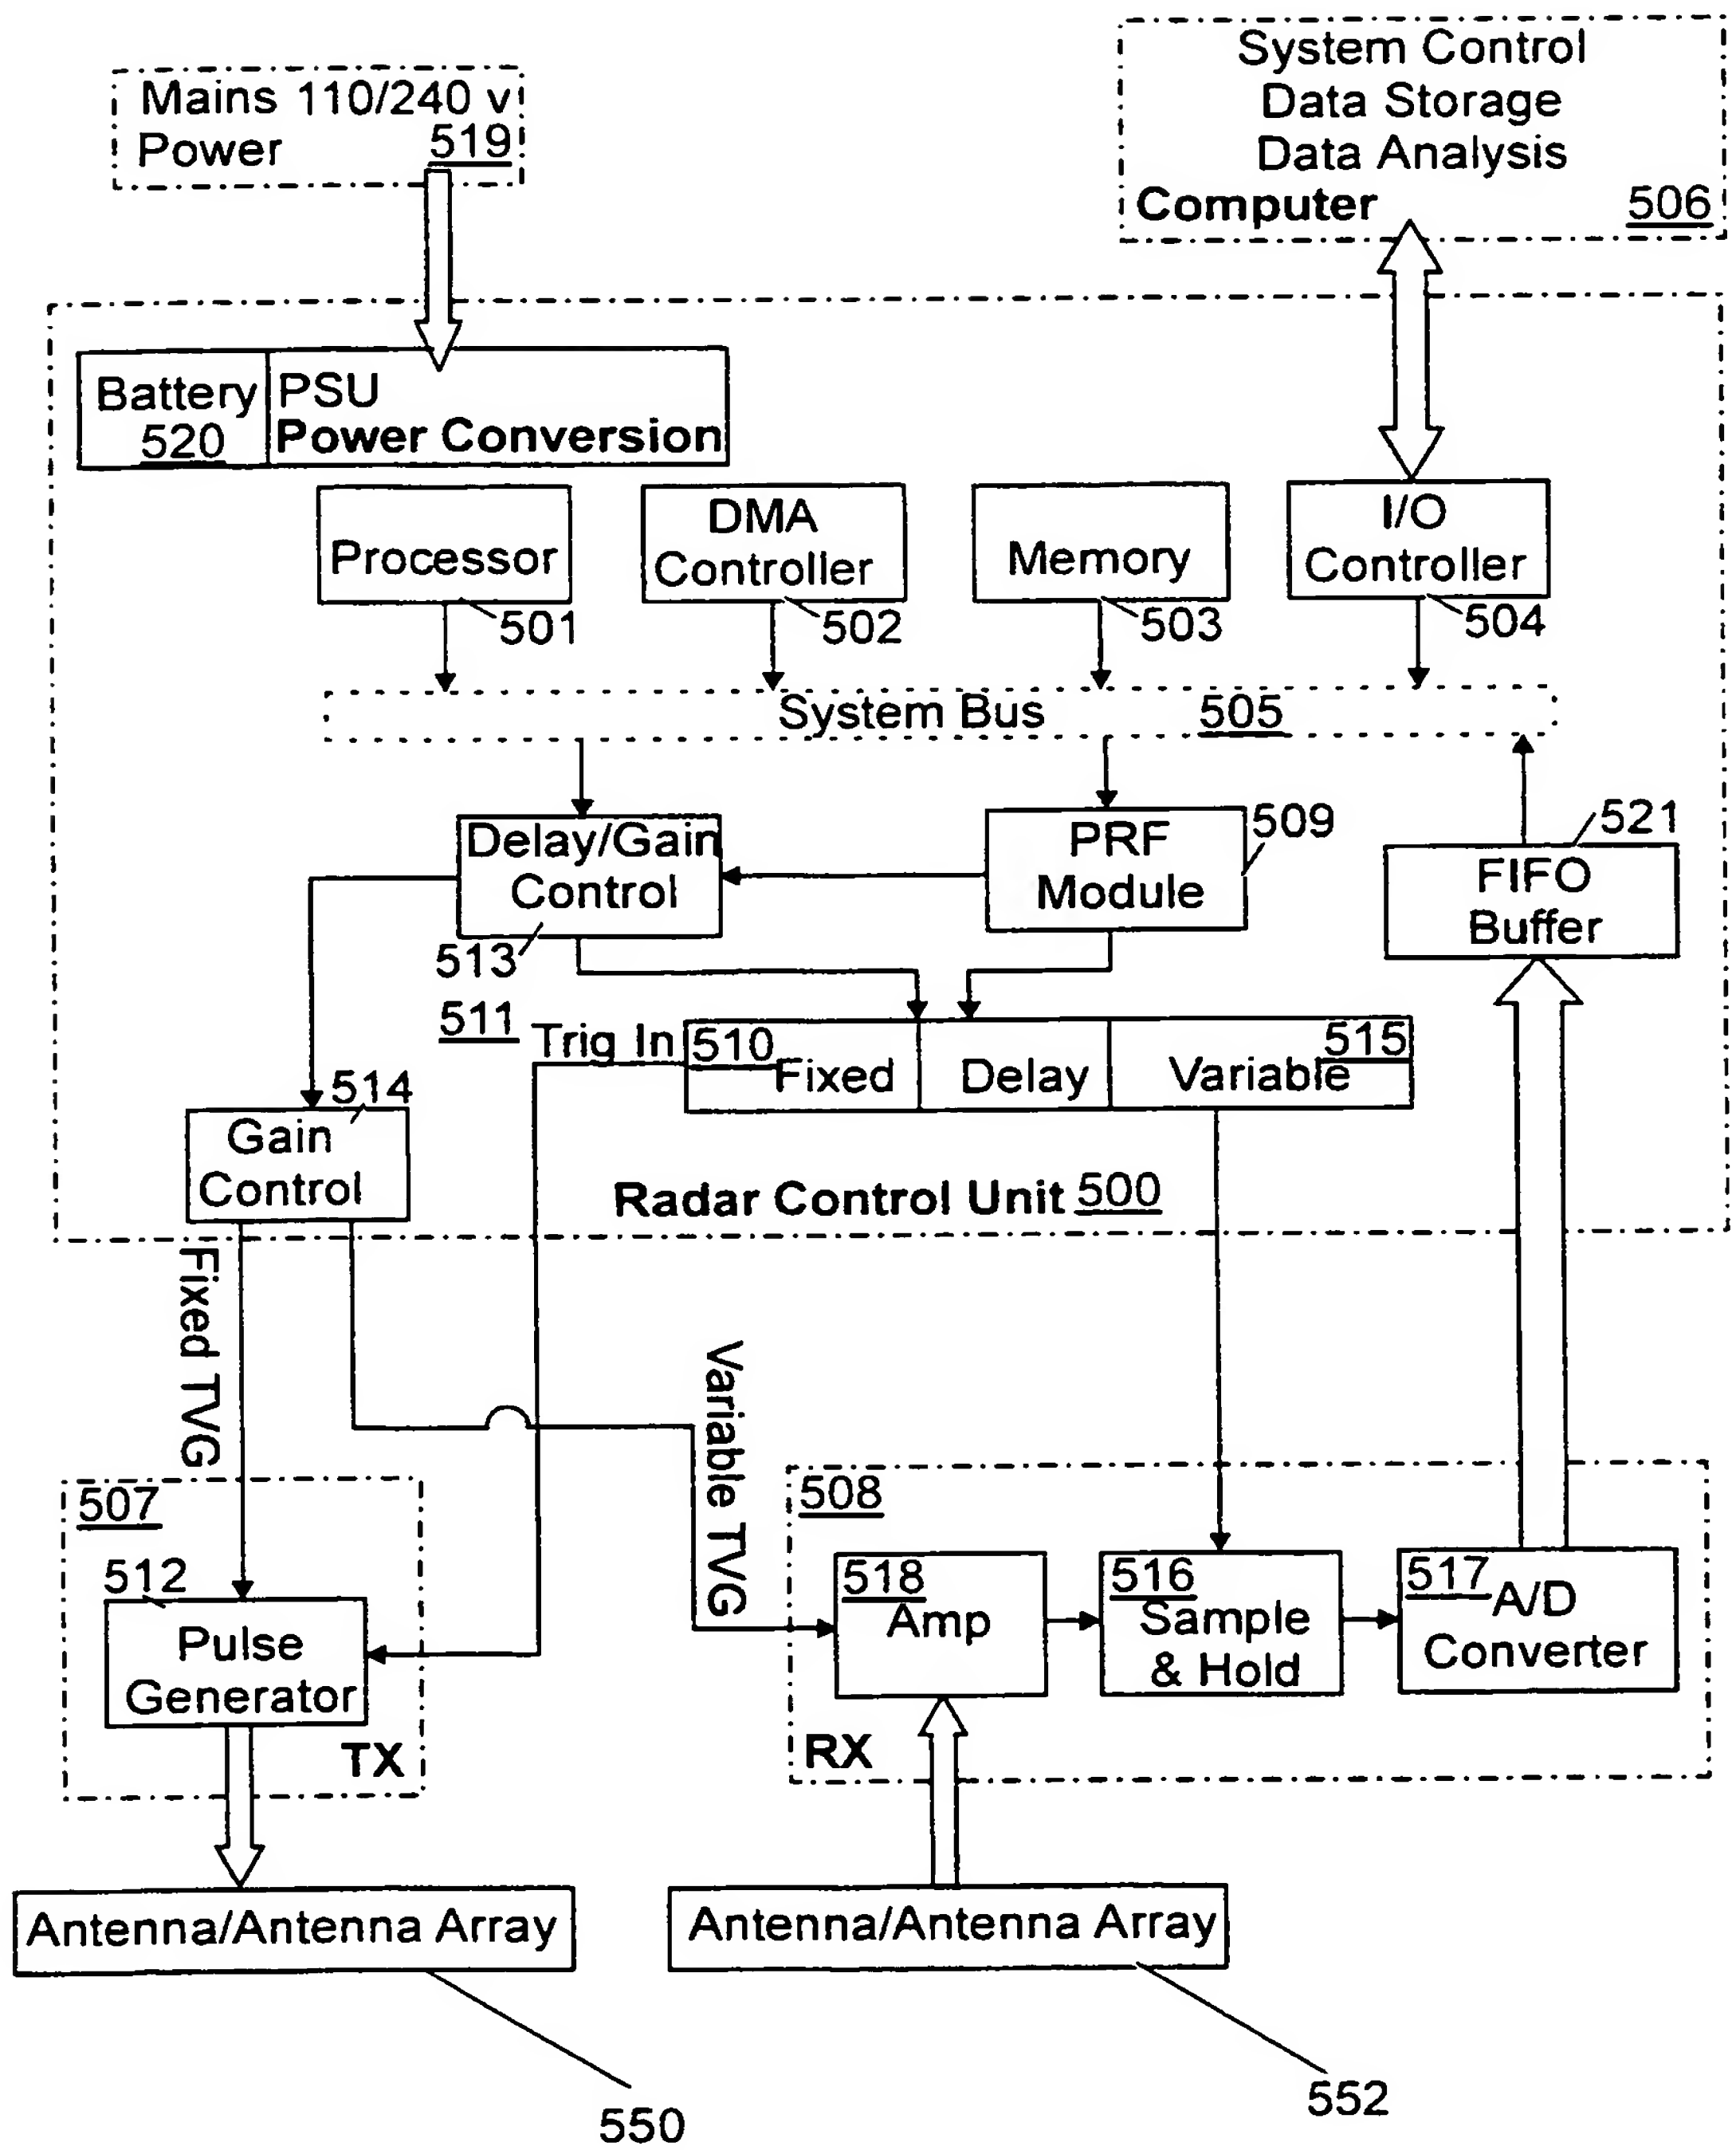
Mains 110/240 v
Power 519
System Control
Data Storage
Data Analysis
Computer 506
Battery 520
PSU
Power Conversion
Processor
501
DMA Controller
502
Memory
503
I/O Controller
504
System Bus 505
Delay/Gain Control
513
PRF Module
509
FIFO Buffer
521
511
Trig In
510
Fixed
Delay
Variable
515
514
Gain Control
Radar Control Unit 500
Fixed TVG
Variable TVG
507
512
Pulse Generator
TX
508
518
Amp
516
Sample & Hold
517
A/D Converter
RX
Antenna/Antenna Array
Antenna/Antenna Array
550
552

Fig. 2

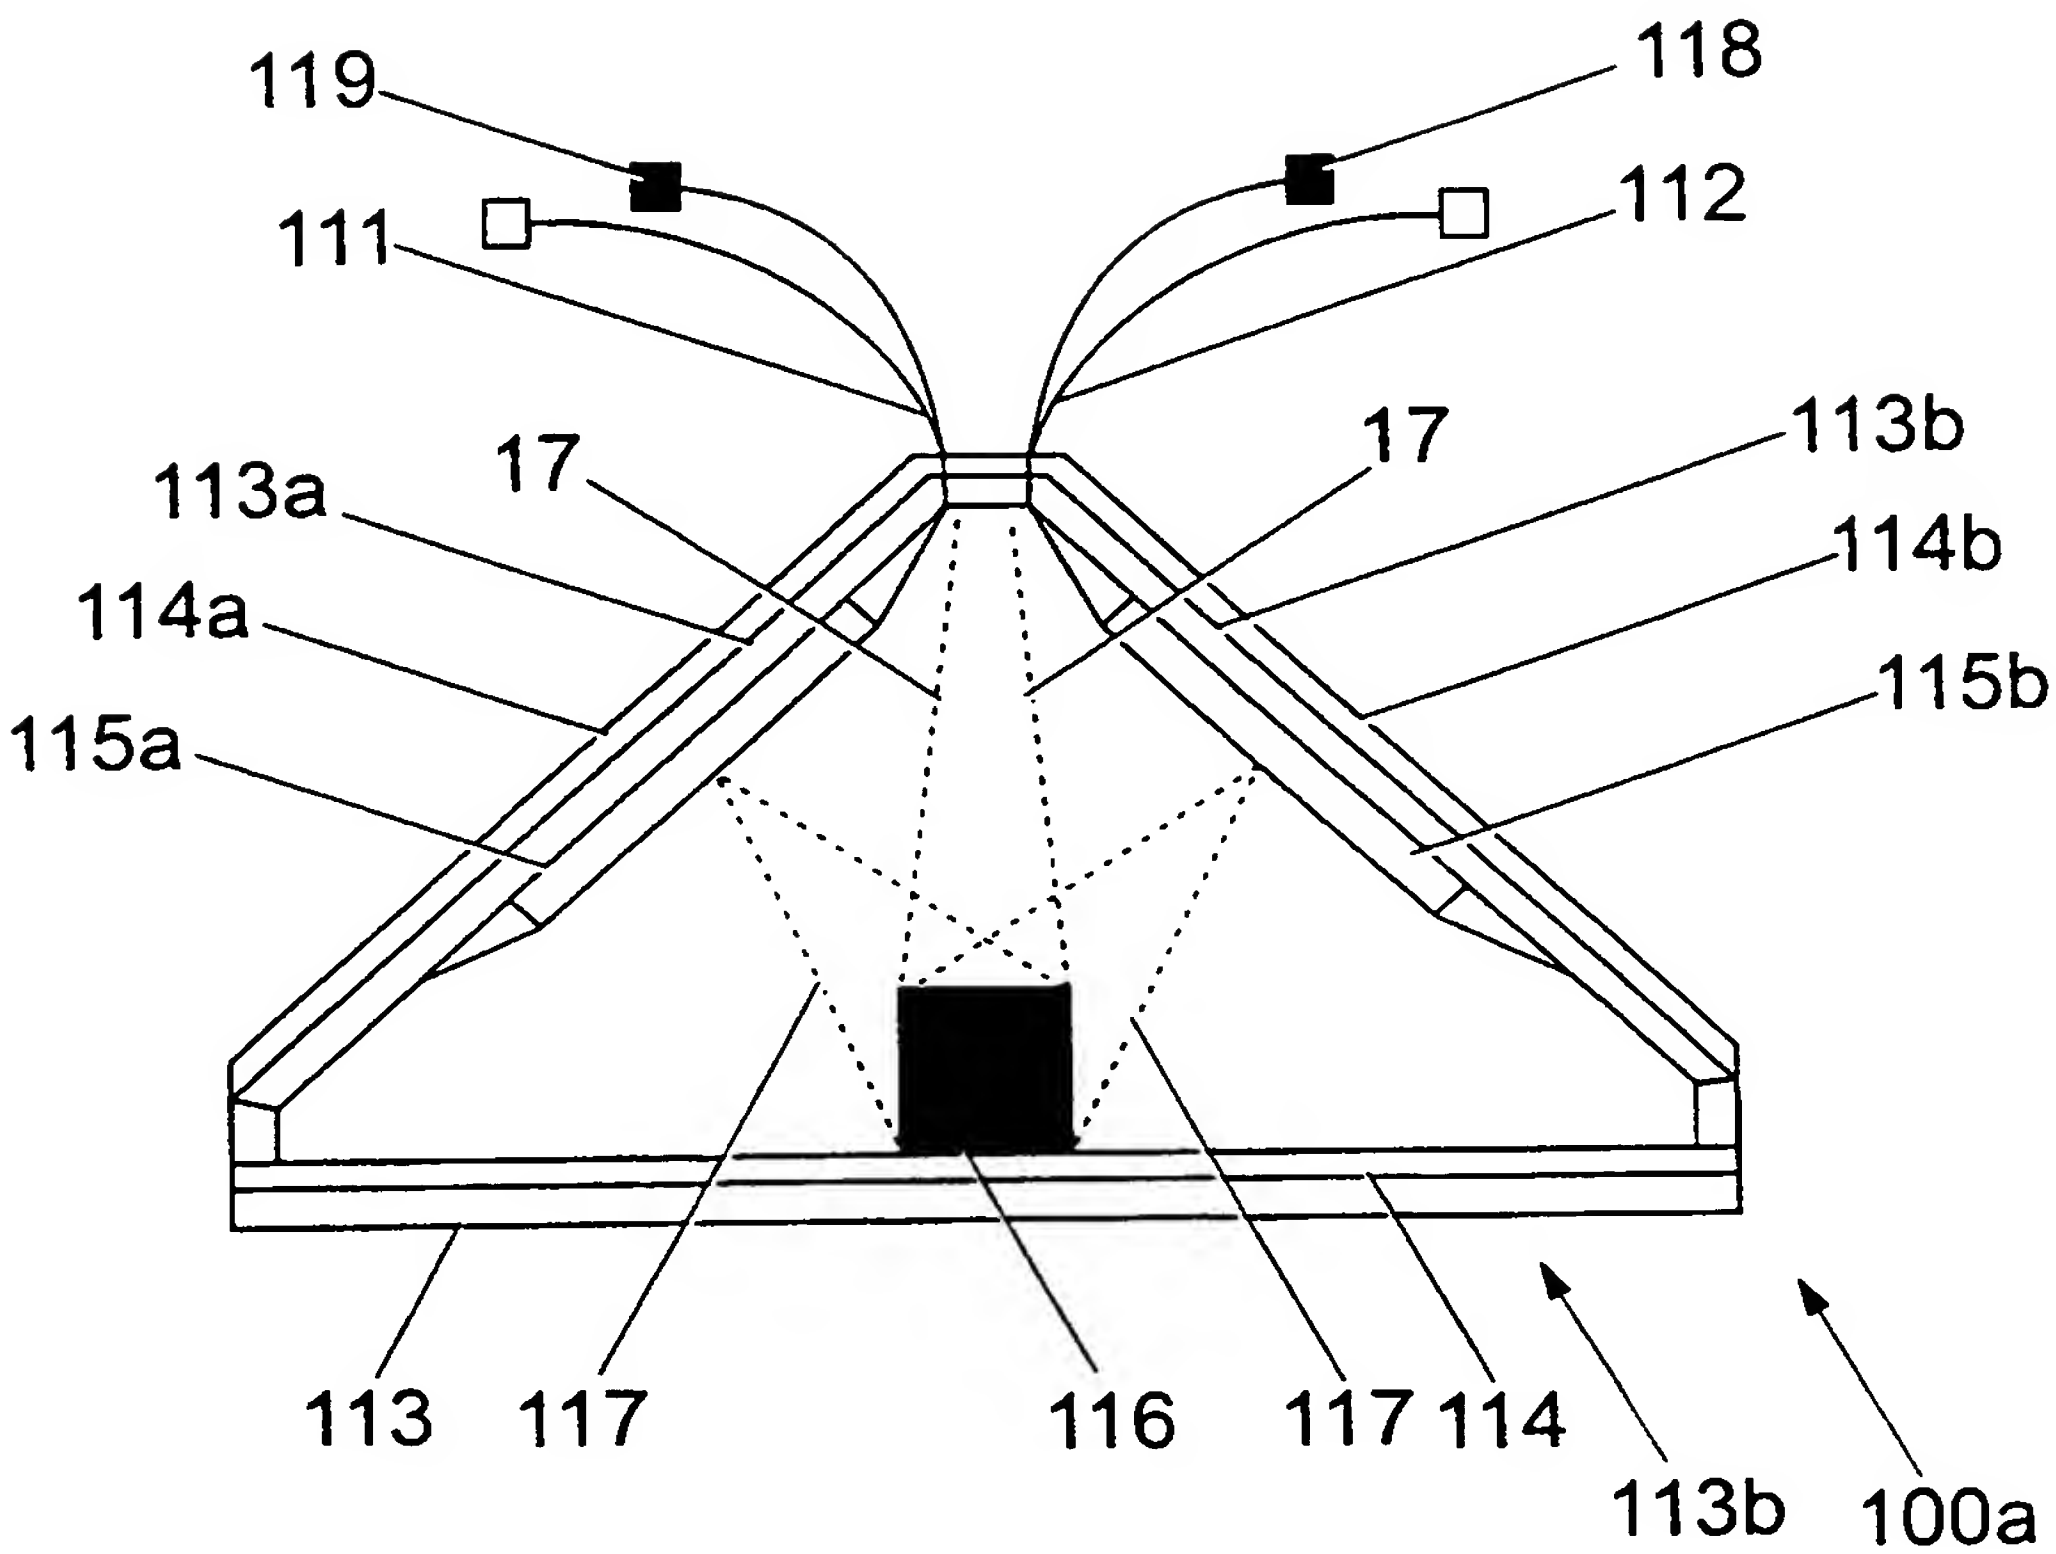
119
118
111
112
17
17
113a
113b
114a
114b
115a
115b
113
117
116
117
114
113b
100a

Fig. 3A

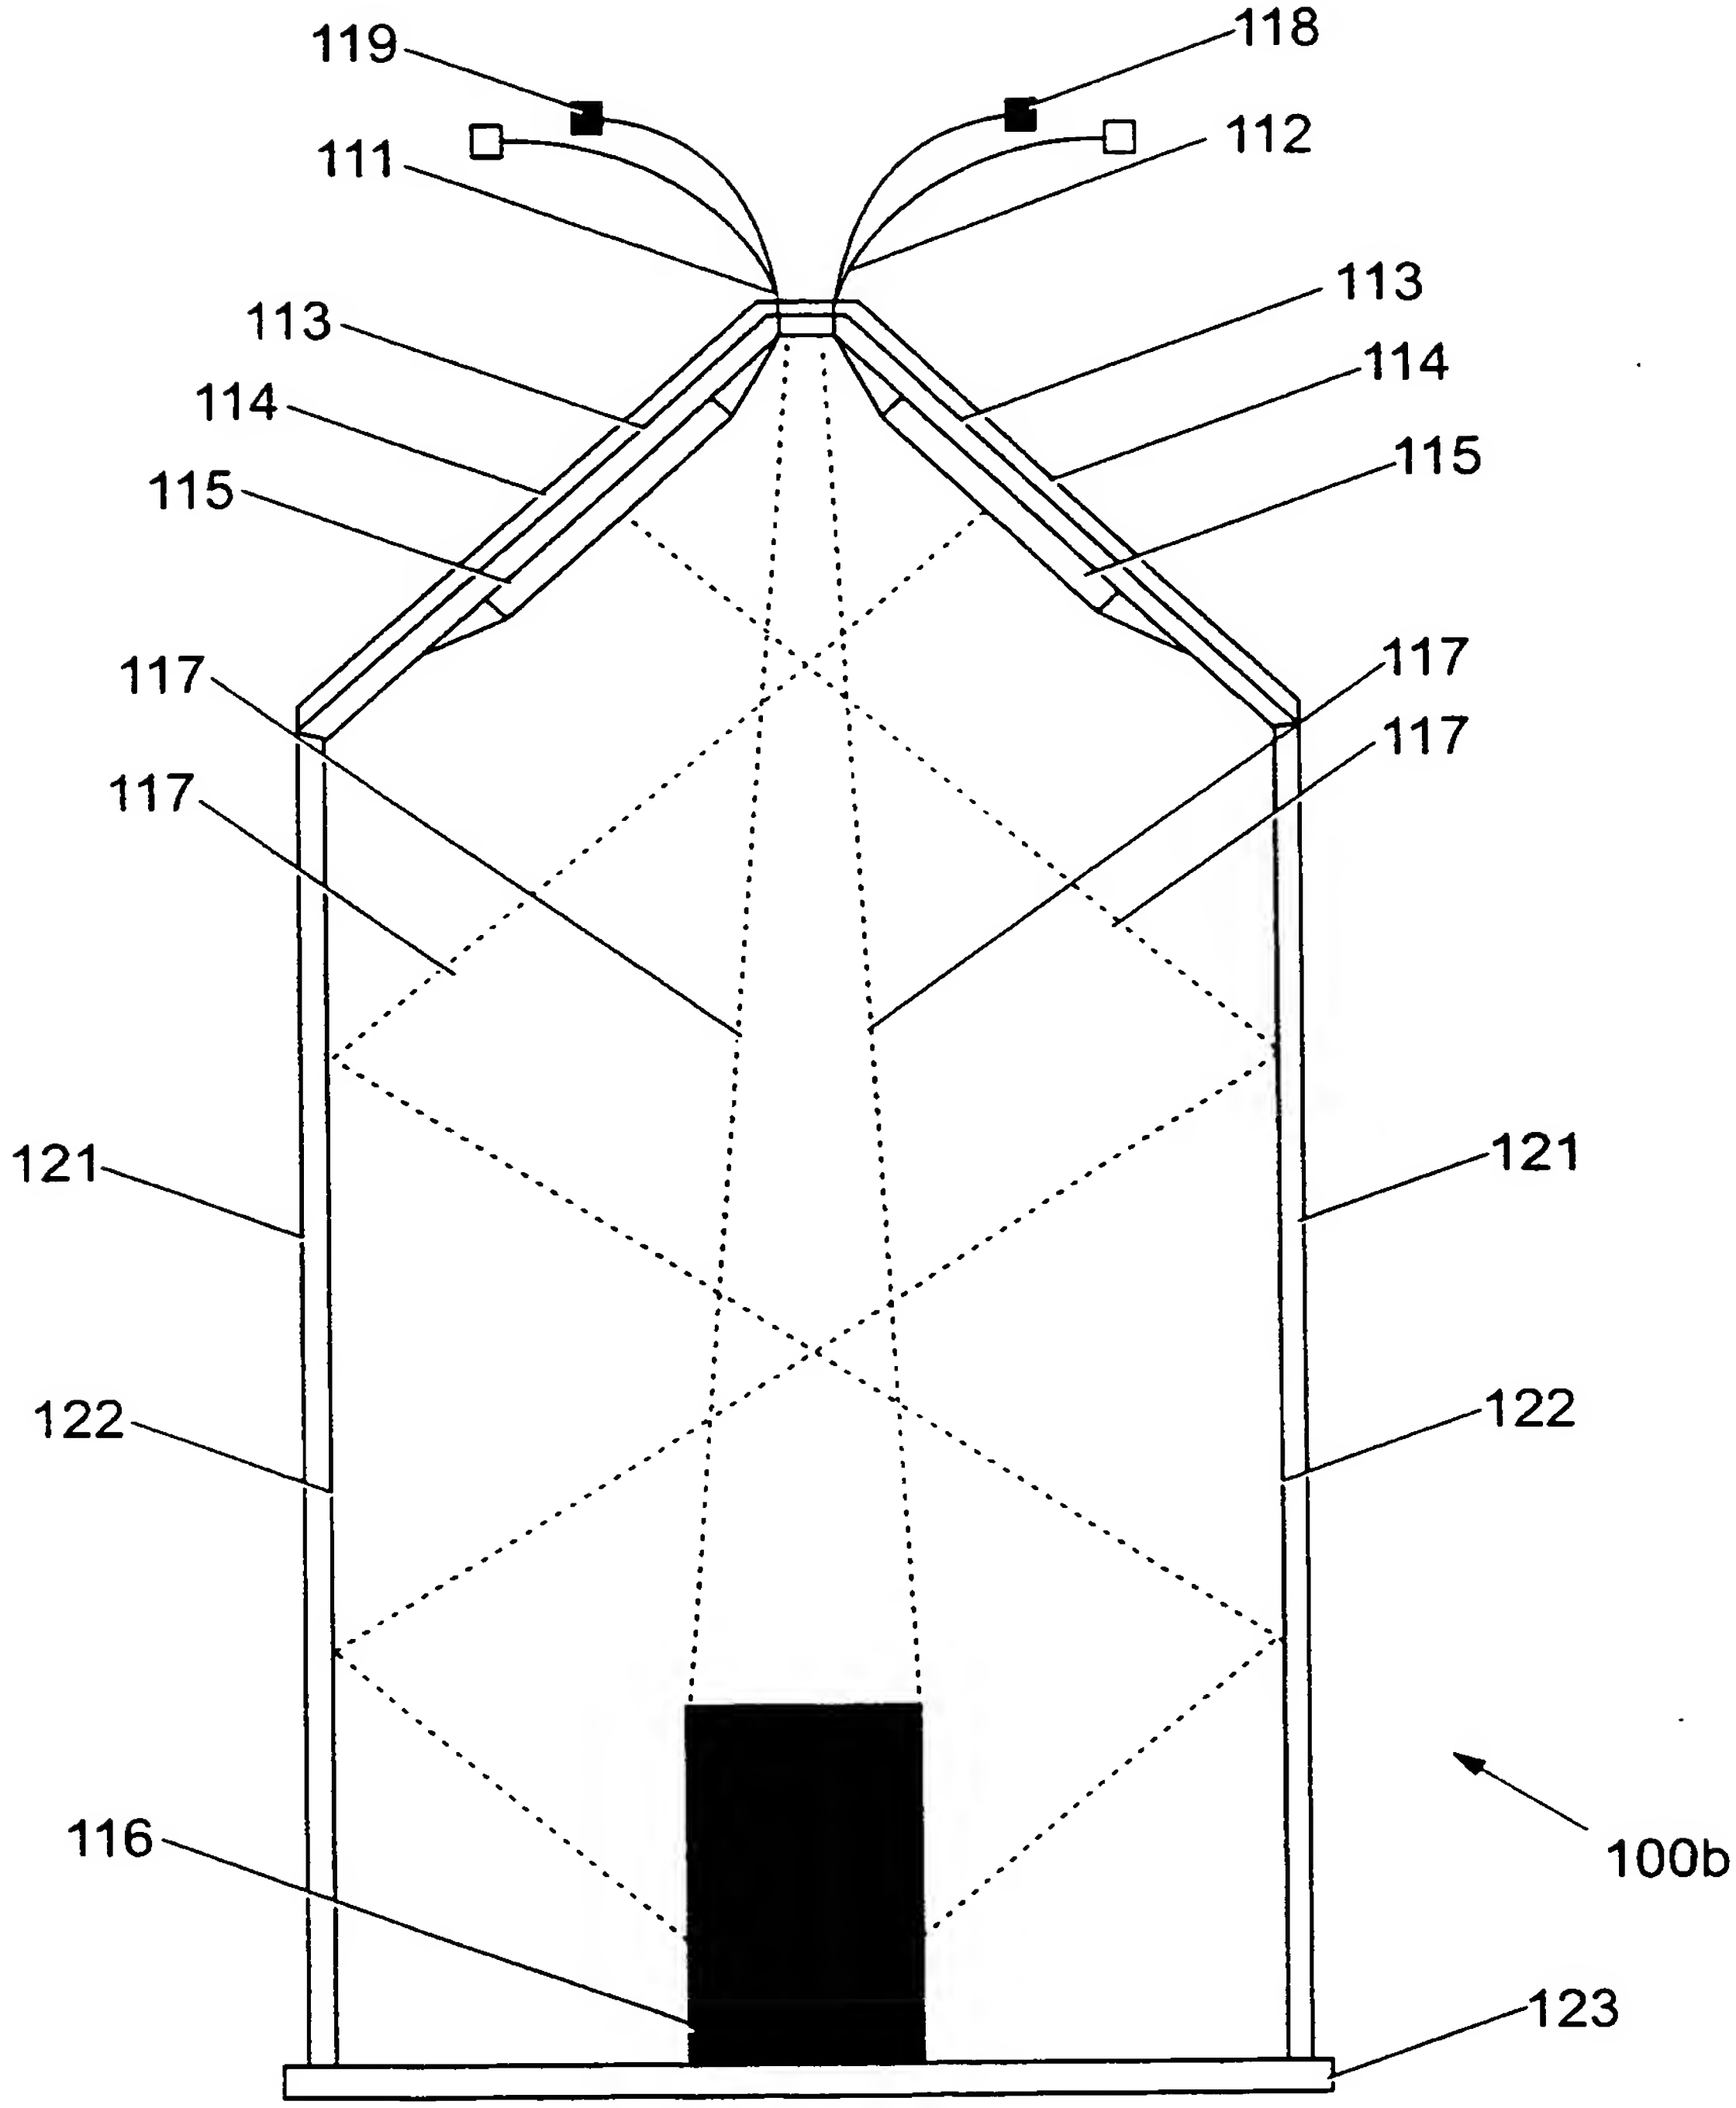
119
118
111
112
113
113
114
114
115
115
117
117
117
117
121
121
122
122
116
100b
123

Fig. 3B

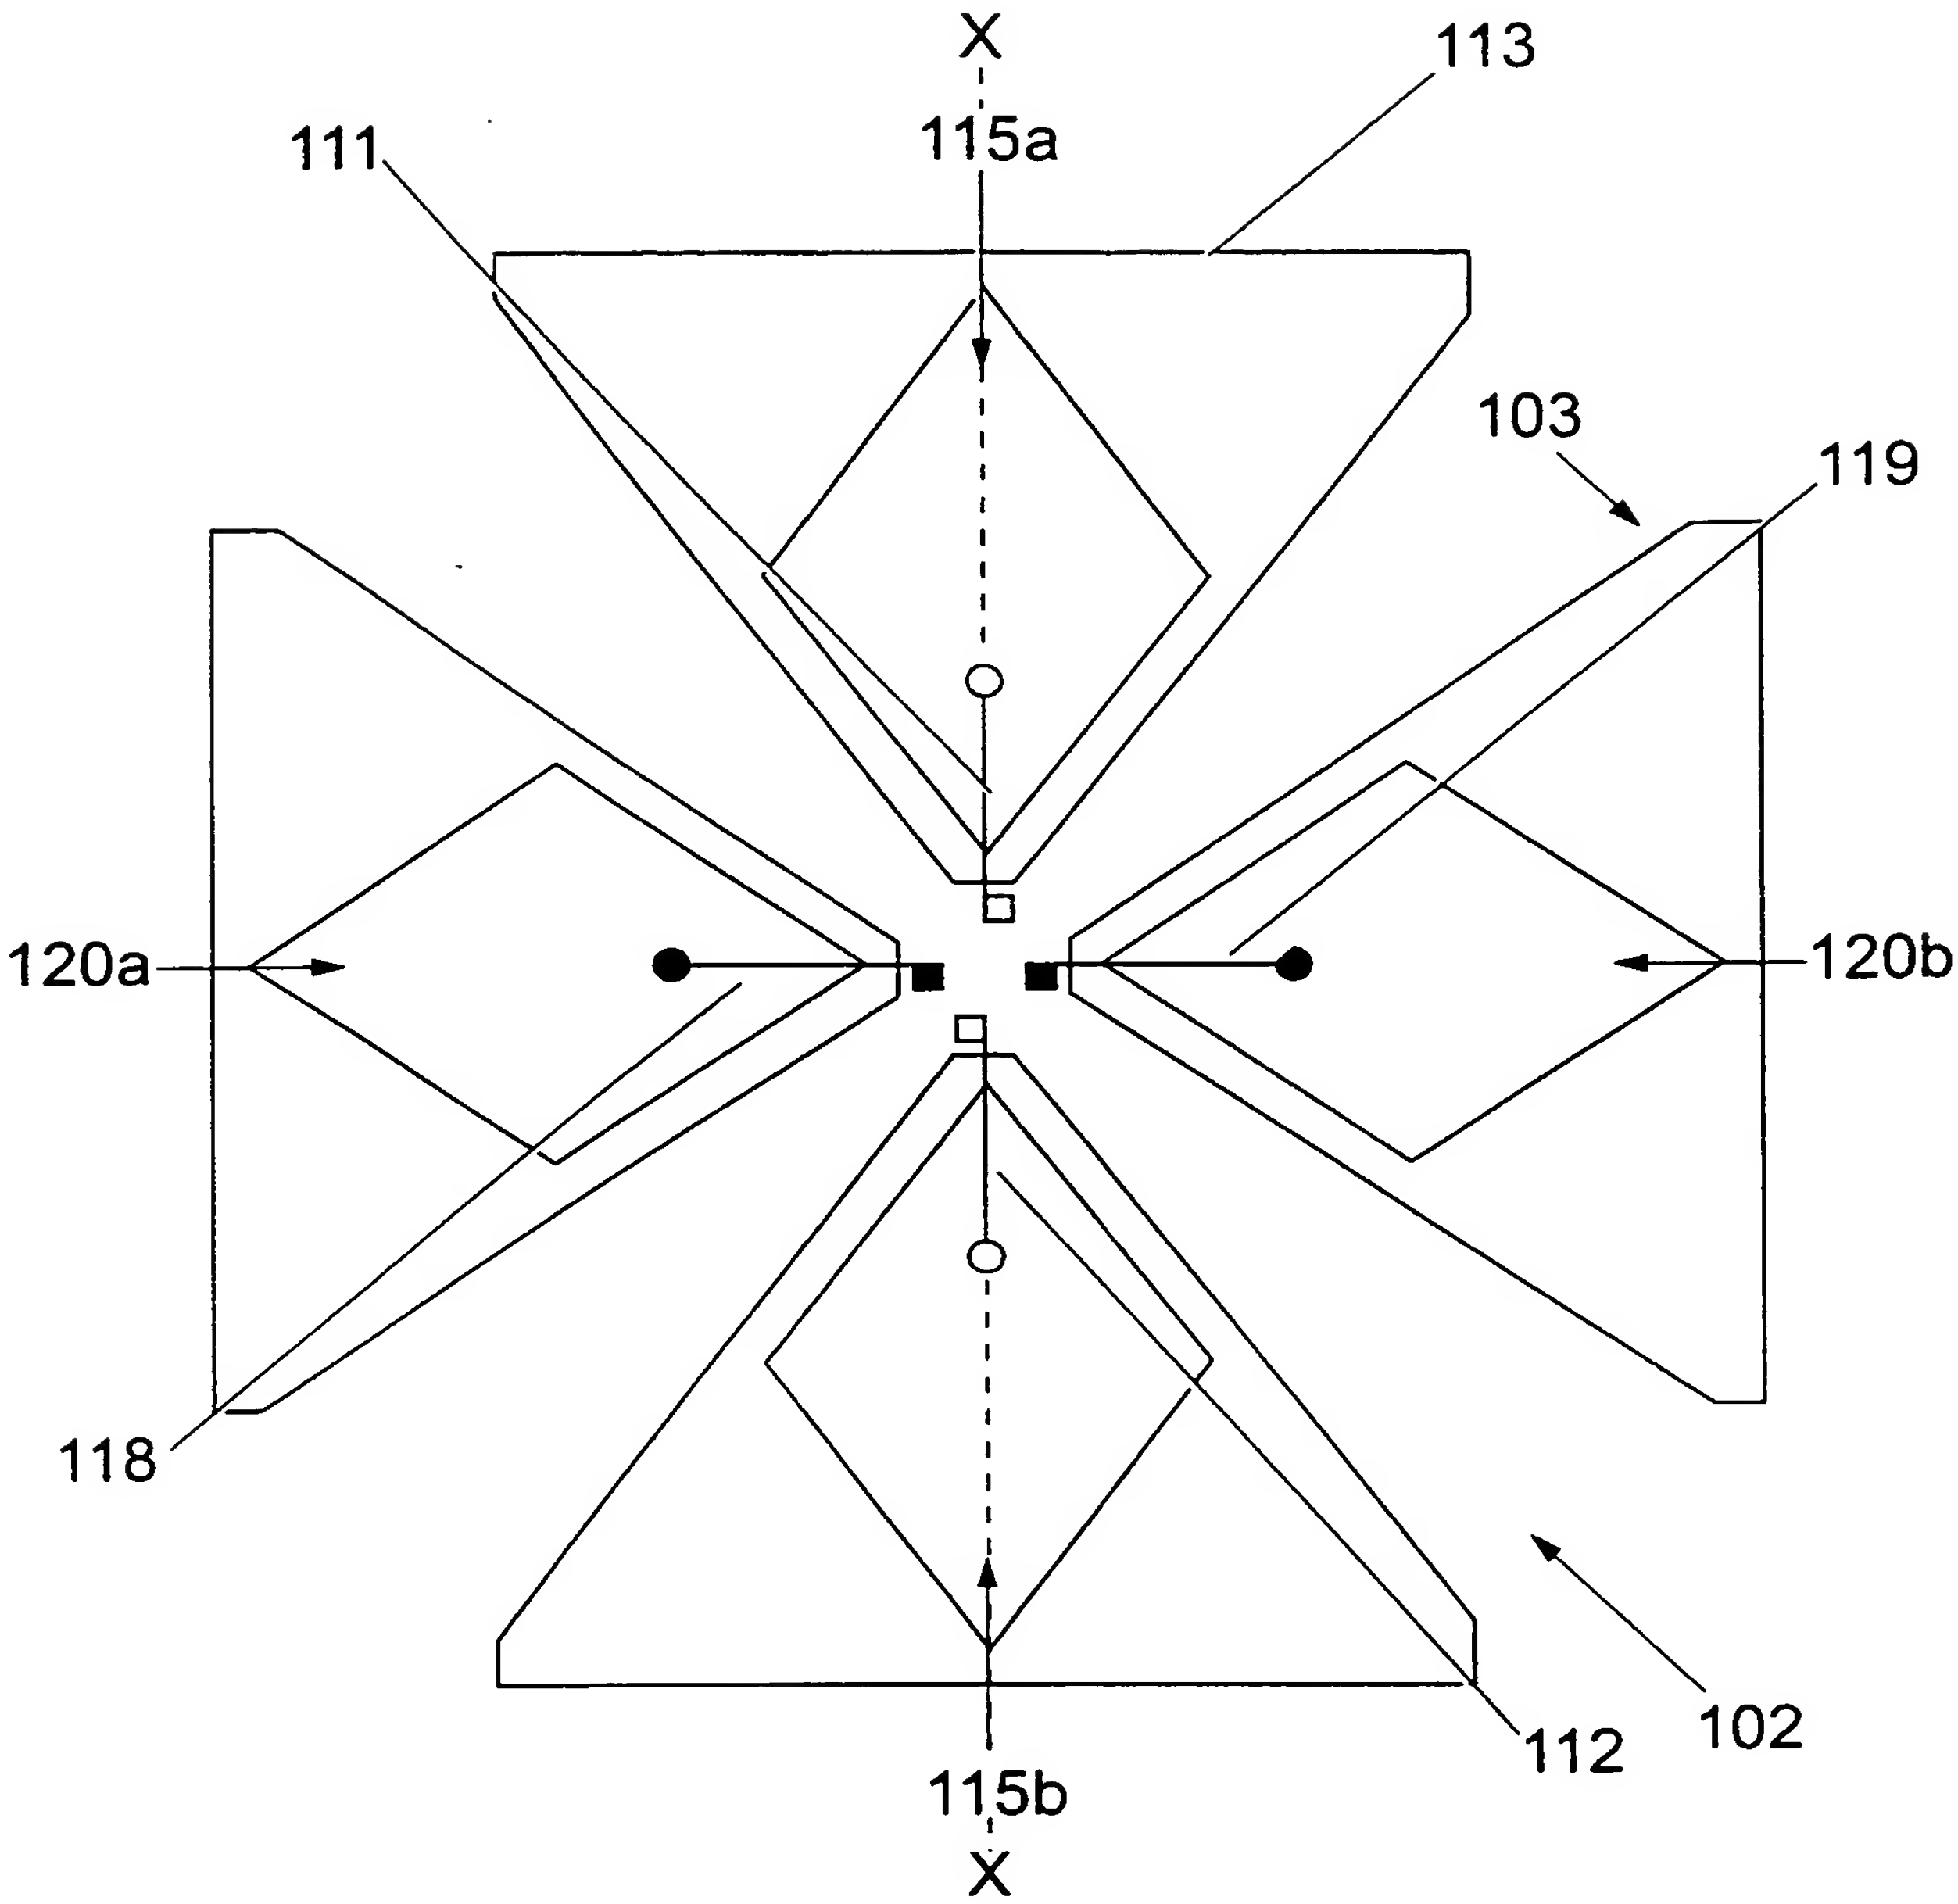

Fig. 4

6 / 21

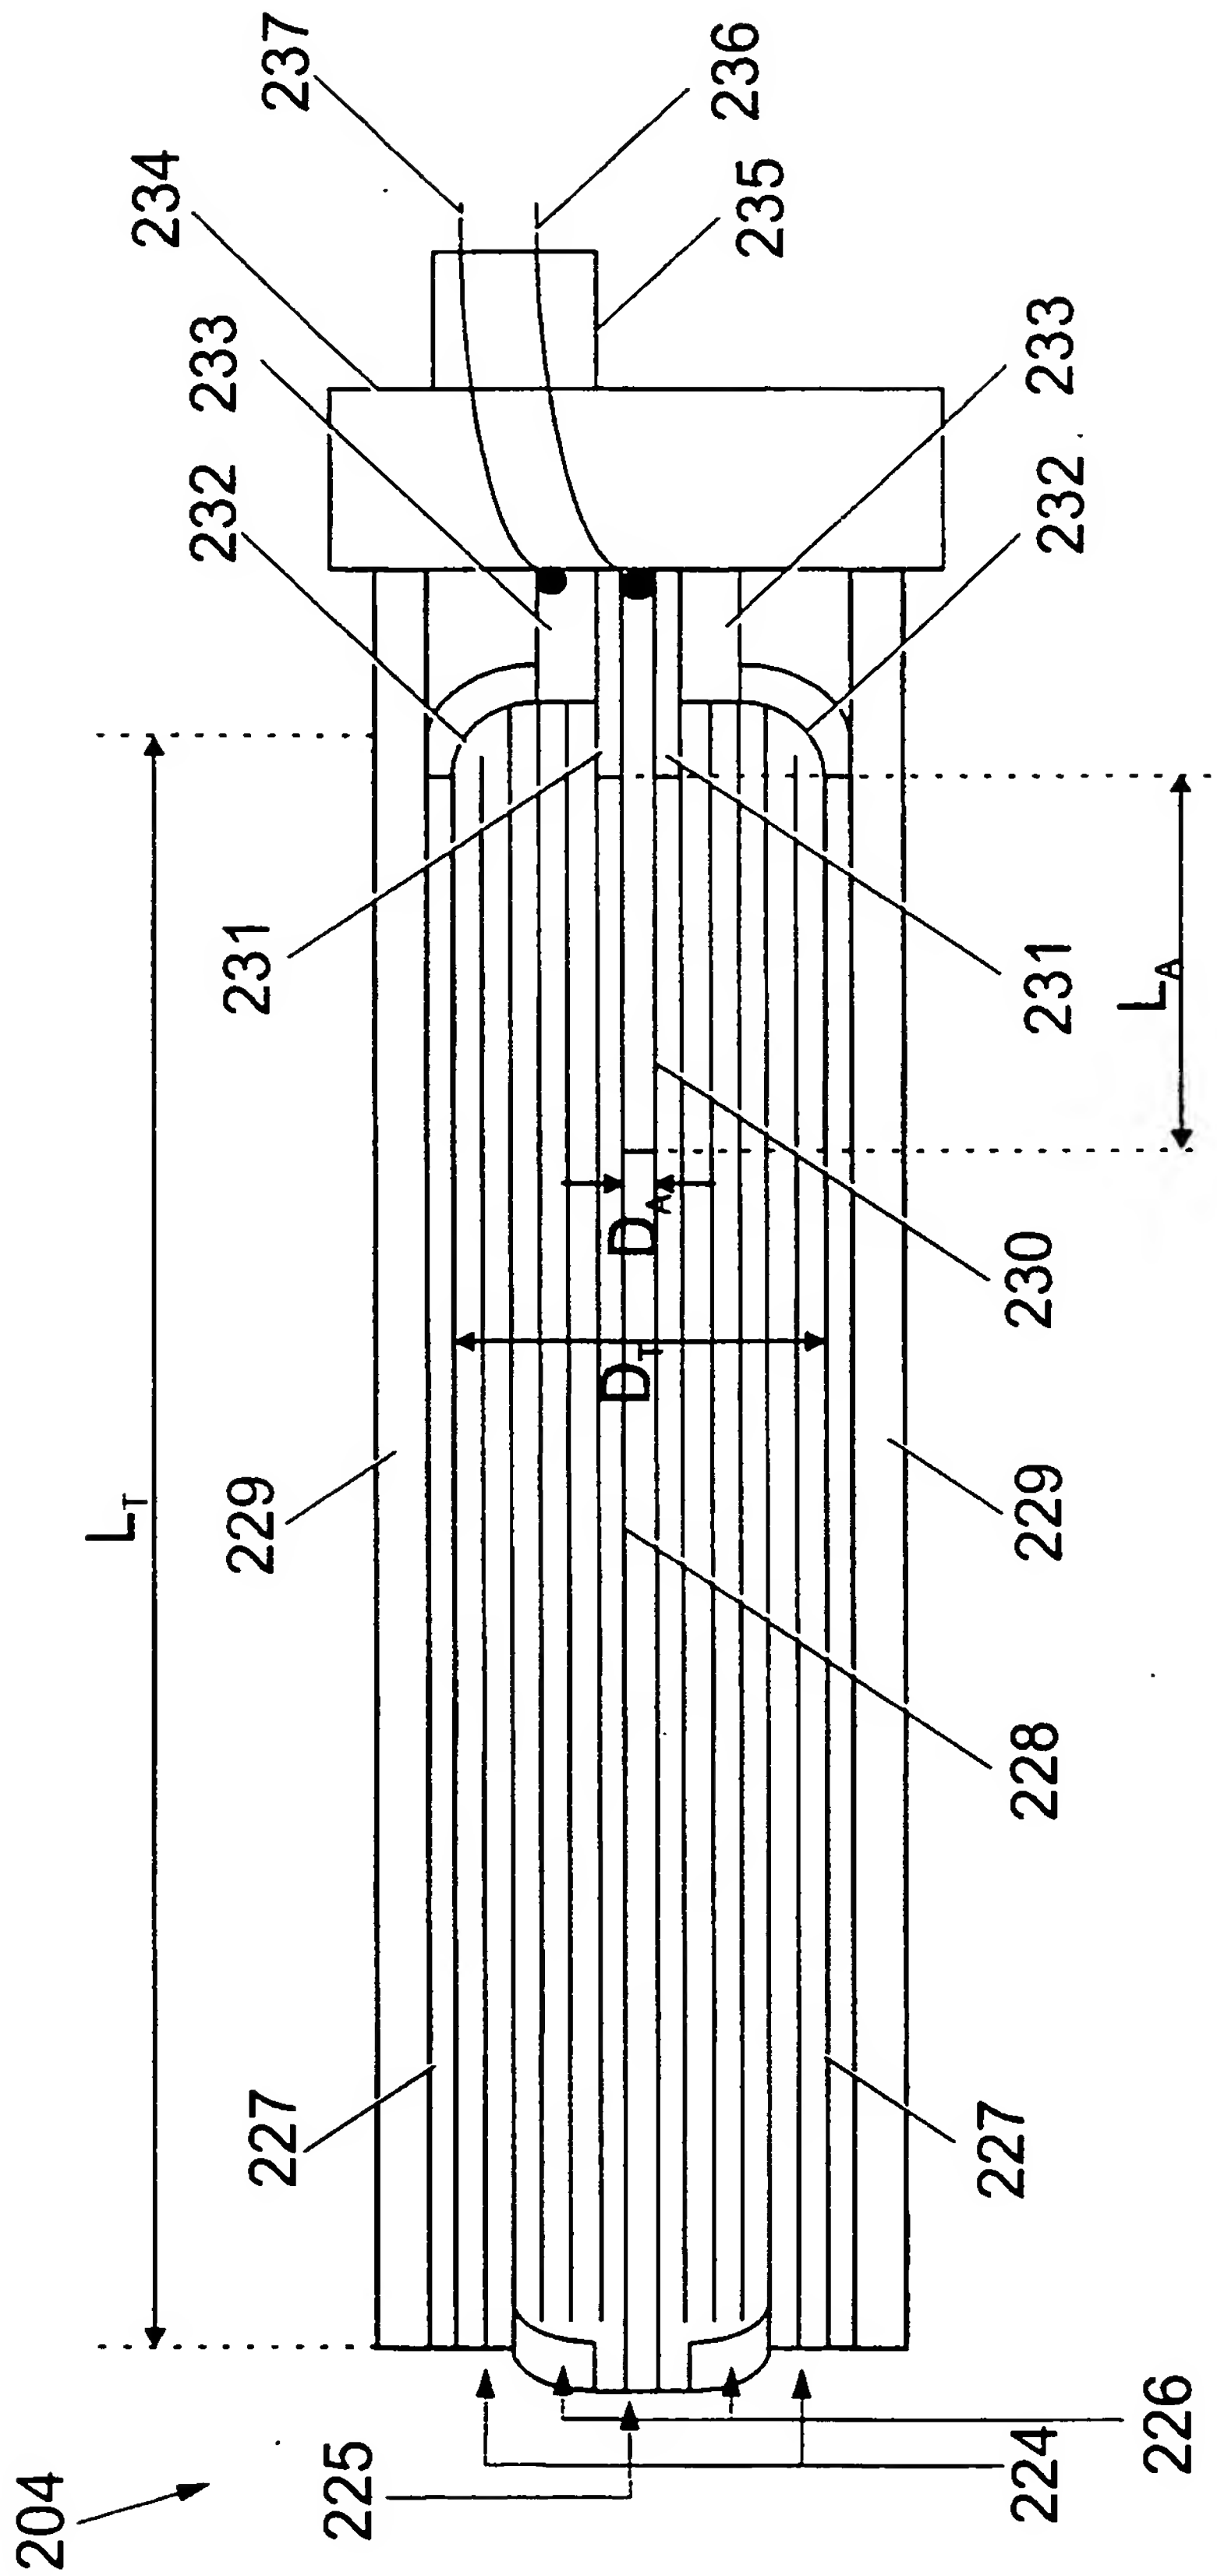
237
236
234
235
233
233
232
232
231
231
L_A
D_A
230
D_T
L_T
229
229
228
227
227
226
224
225
204

Fig. 5A

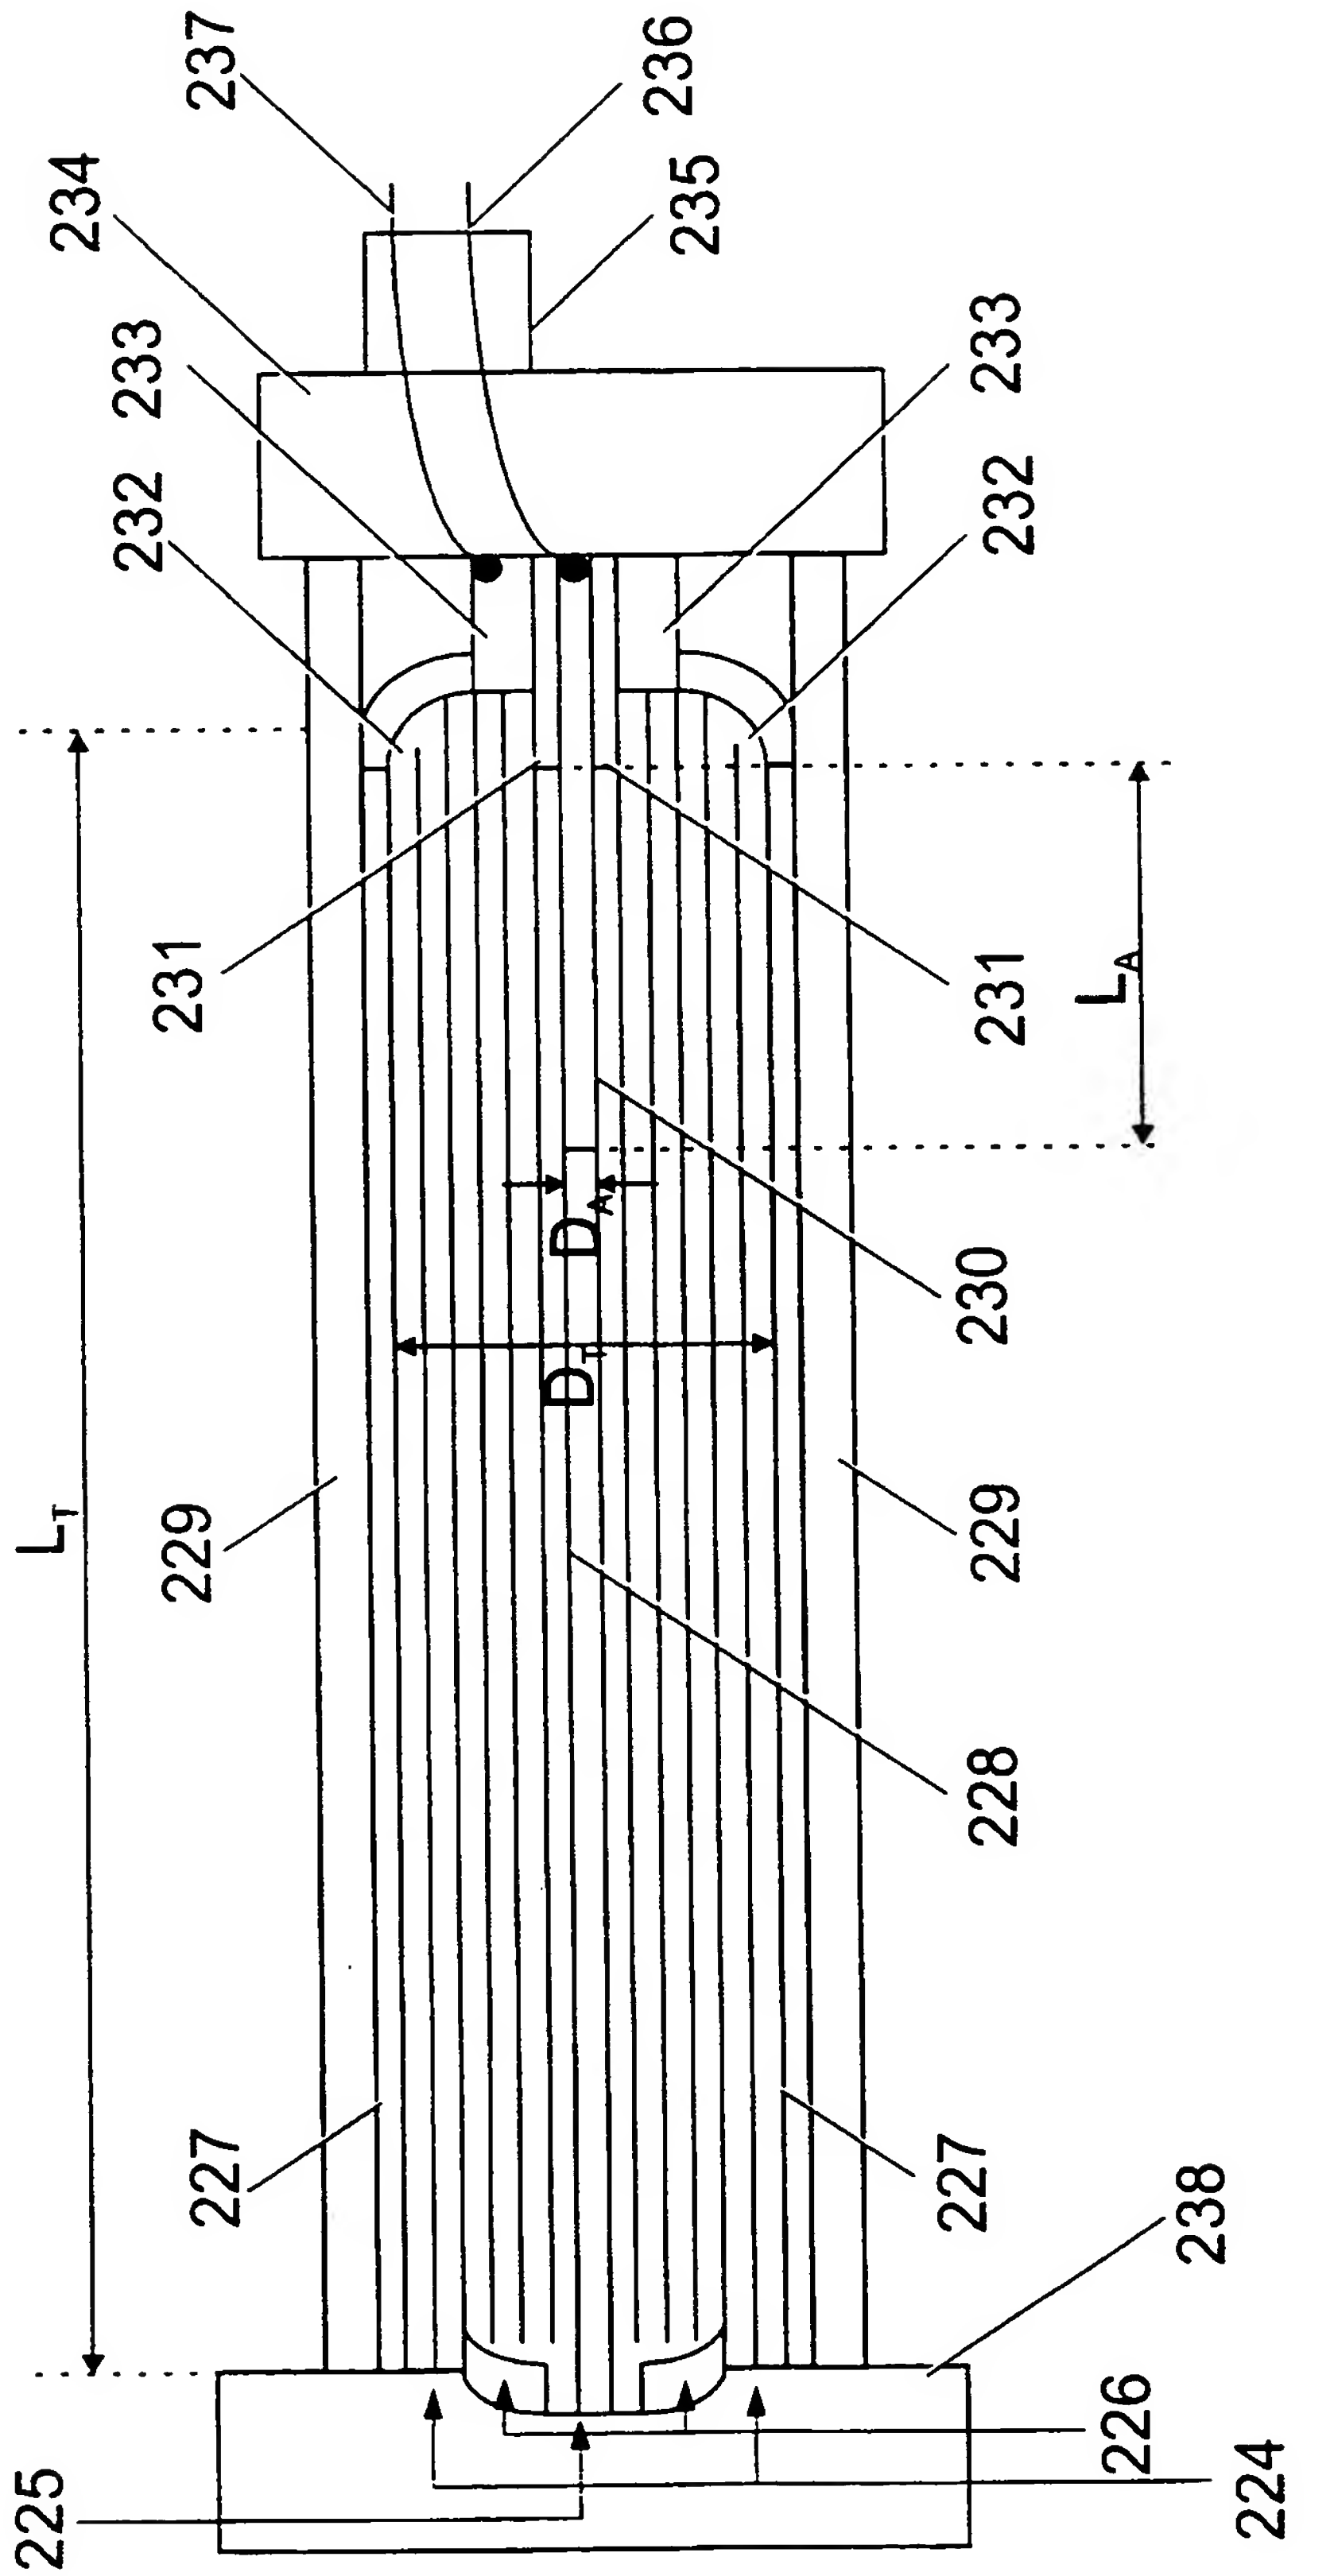
237
236
234
235
233
233
232
232
231
231
L_A
230
D_A
D_T
L_T
229
229
228
227
227
238
226
224
225

Fig. 5B

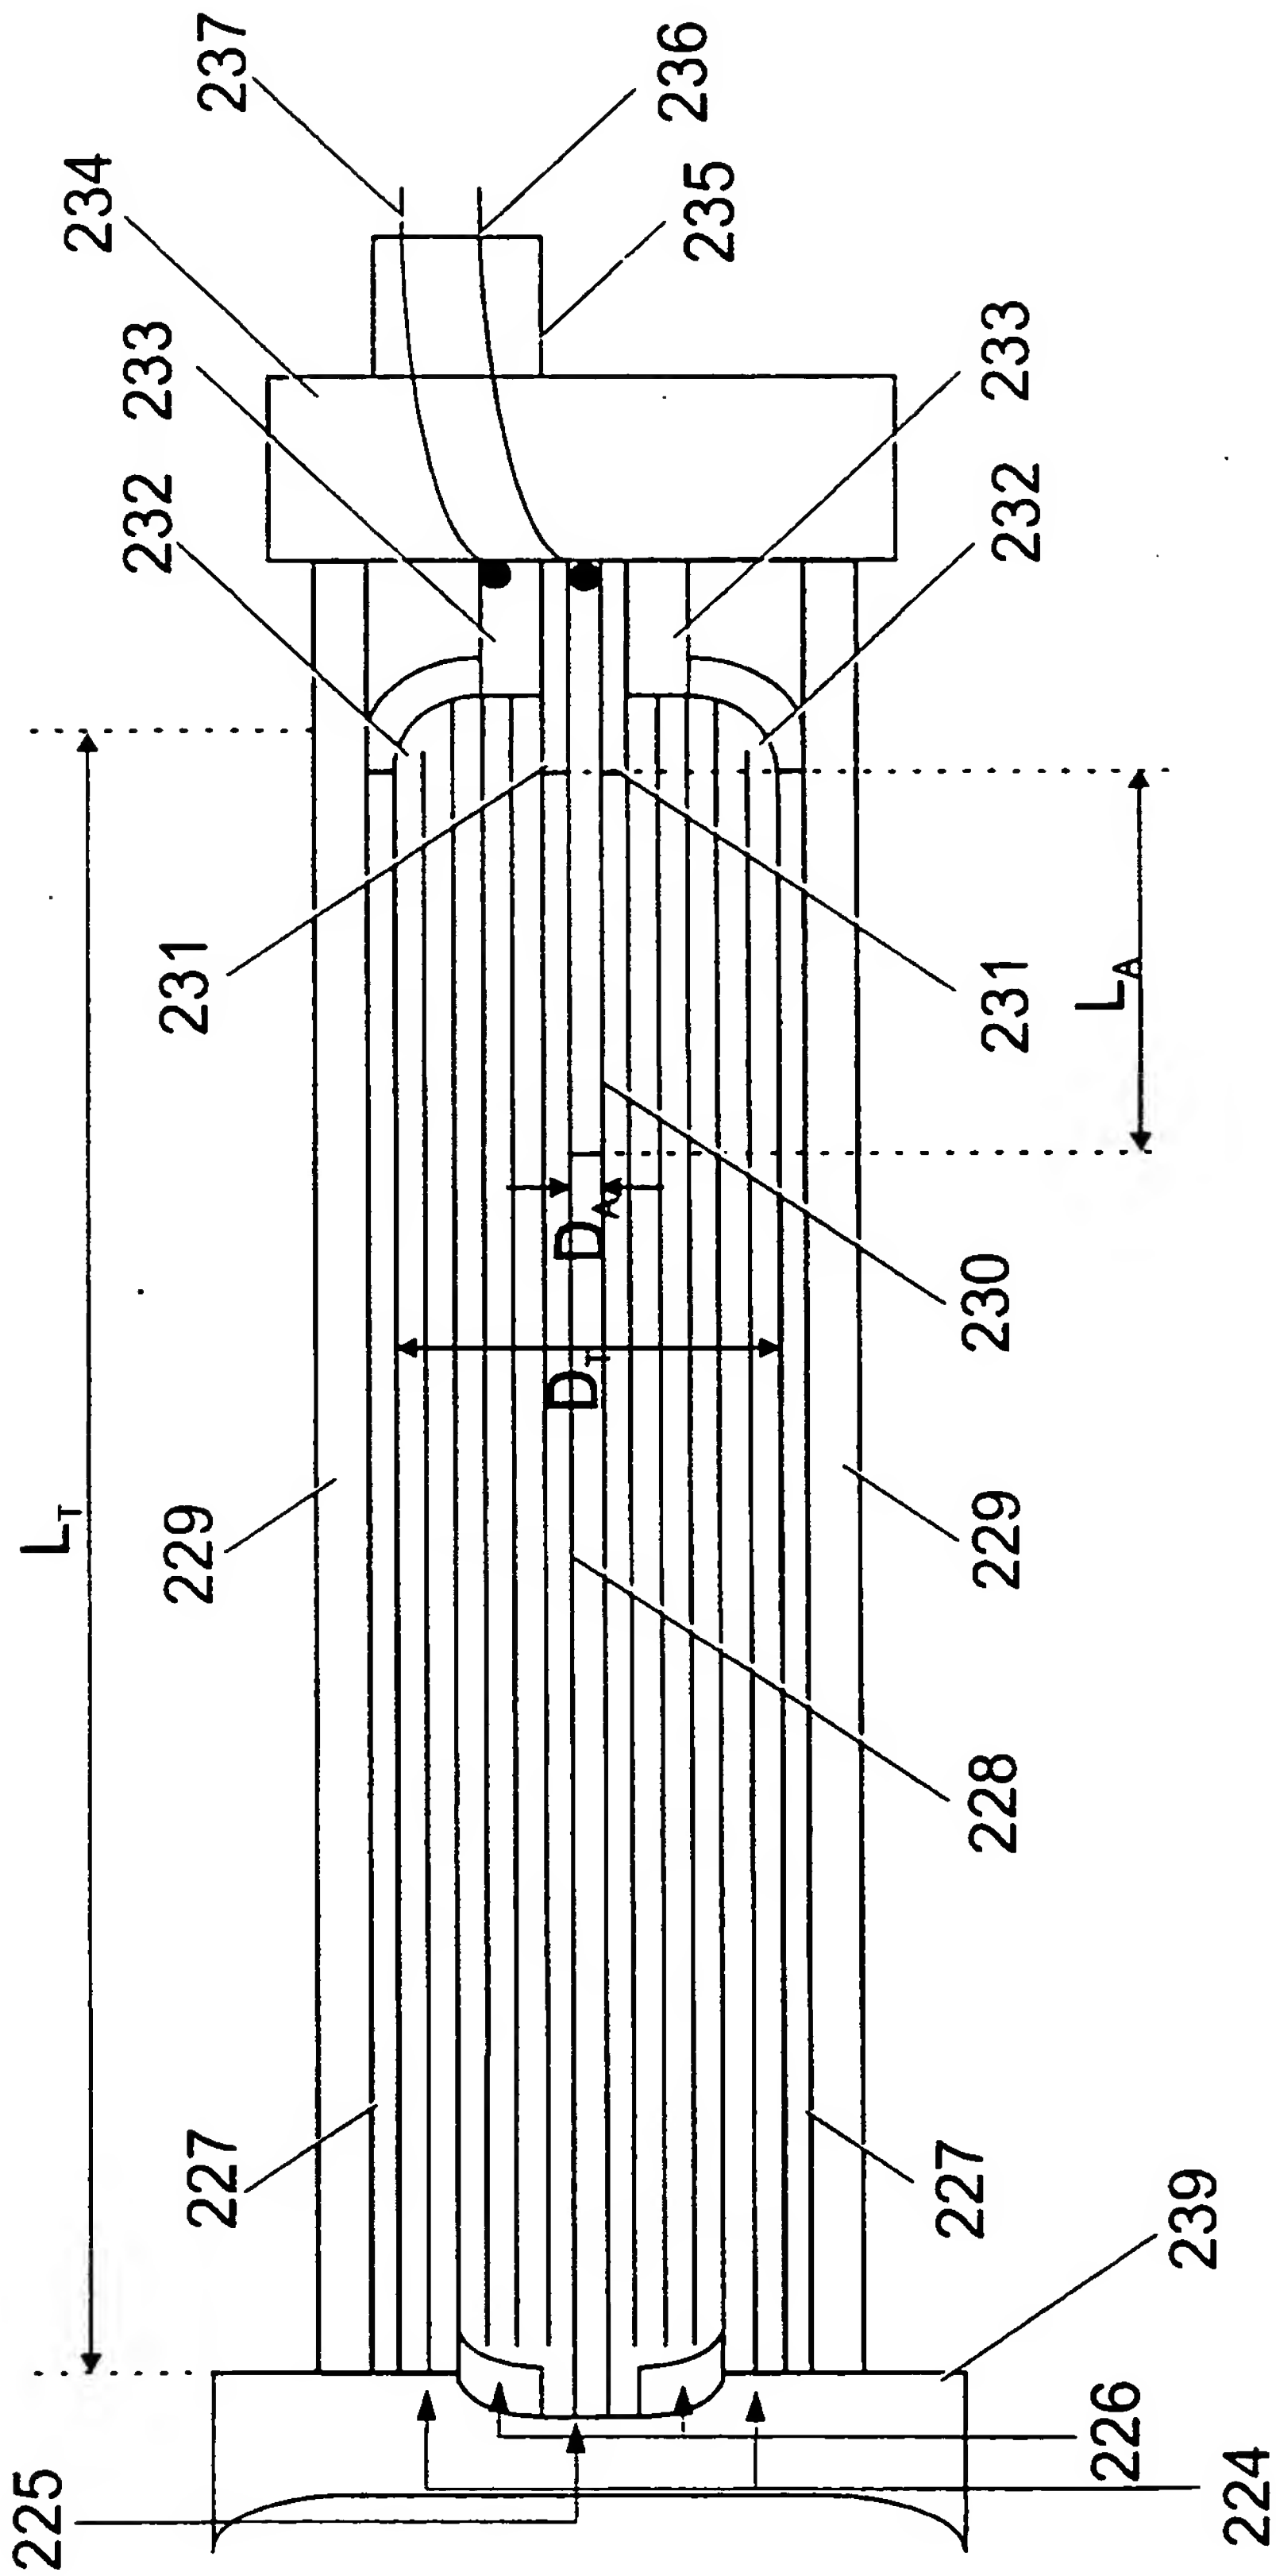
237
236
235
234
233
233
232
232
231
231
L_A
D_A
230
D_T
L_T
229
229
228
227
227
239
226
224
225

Fig. 5C

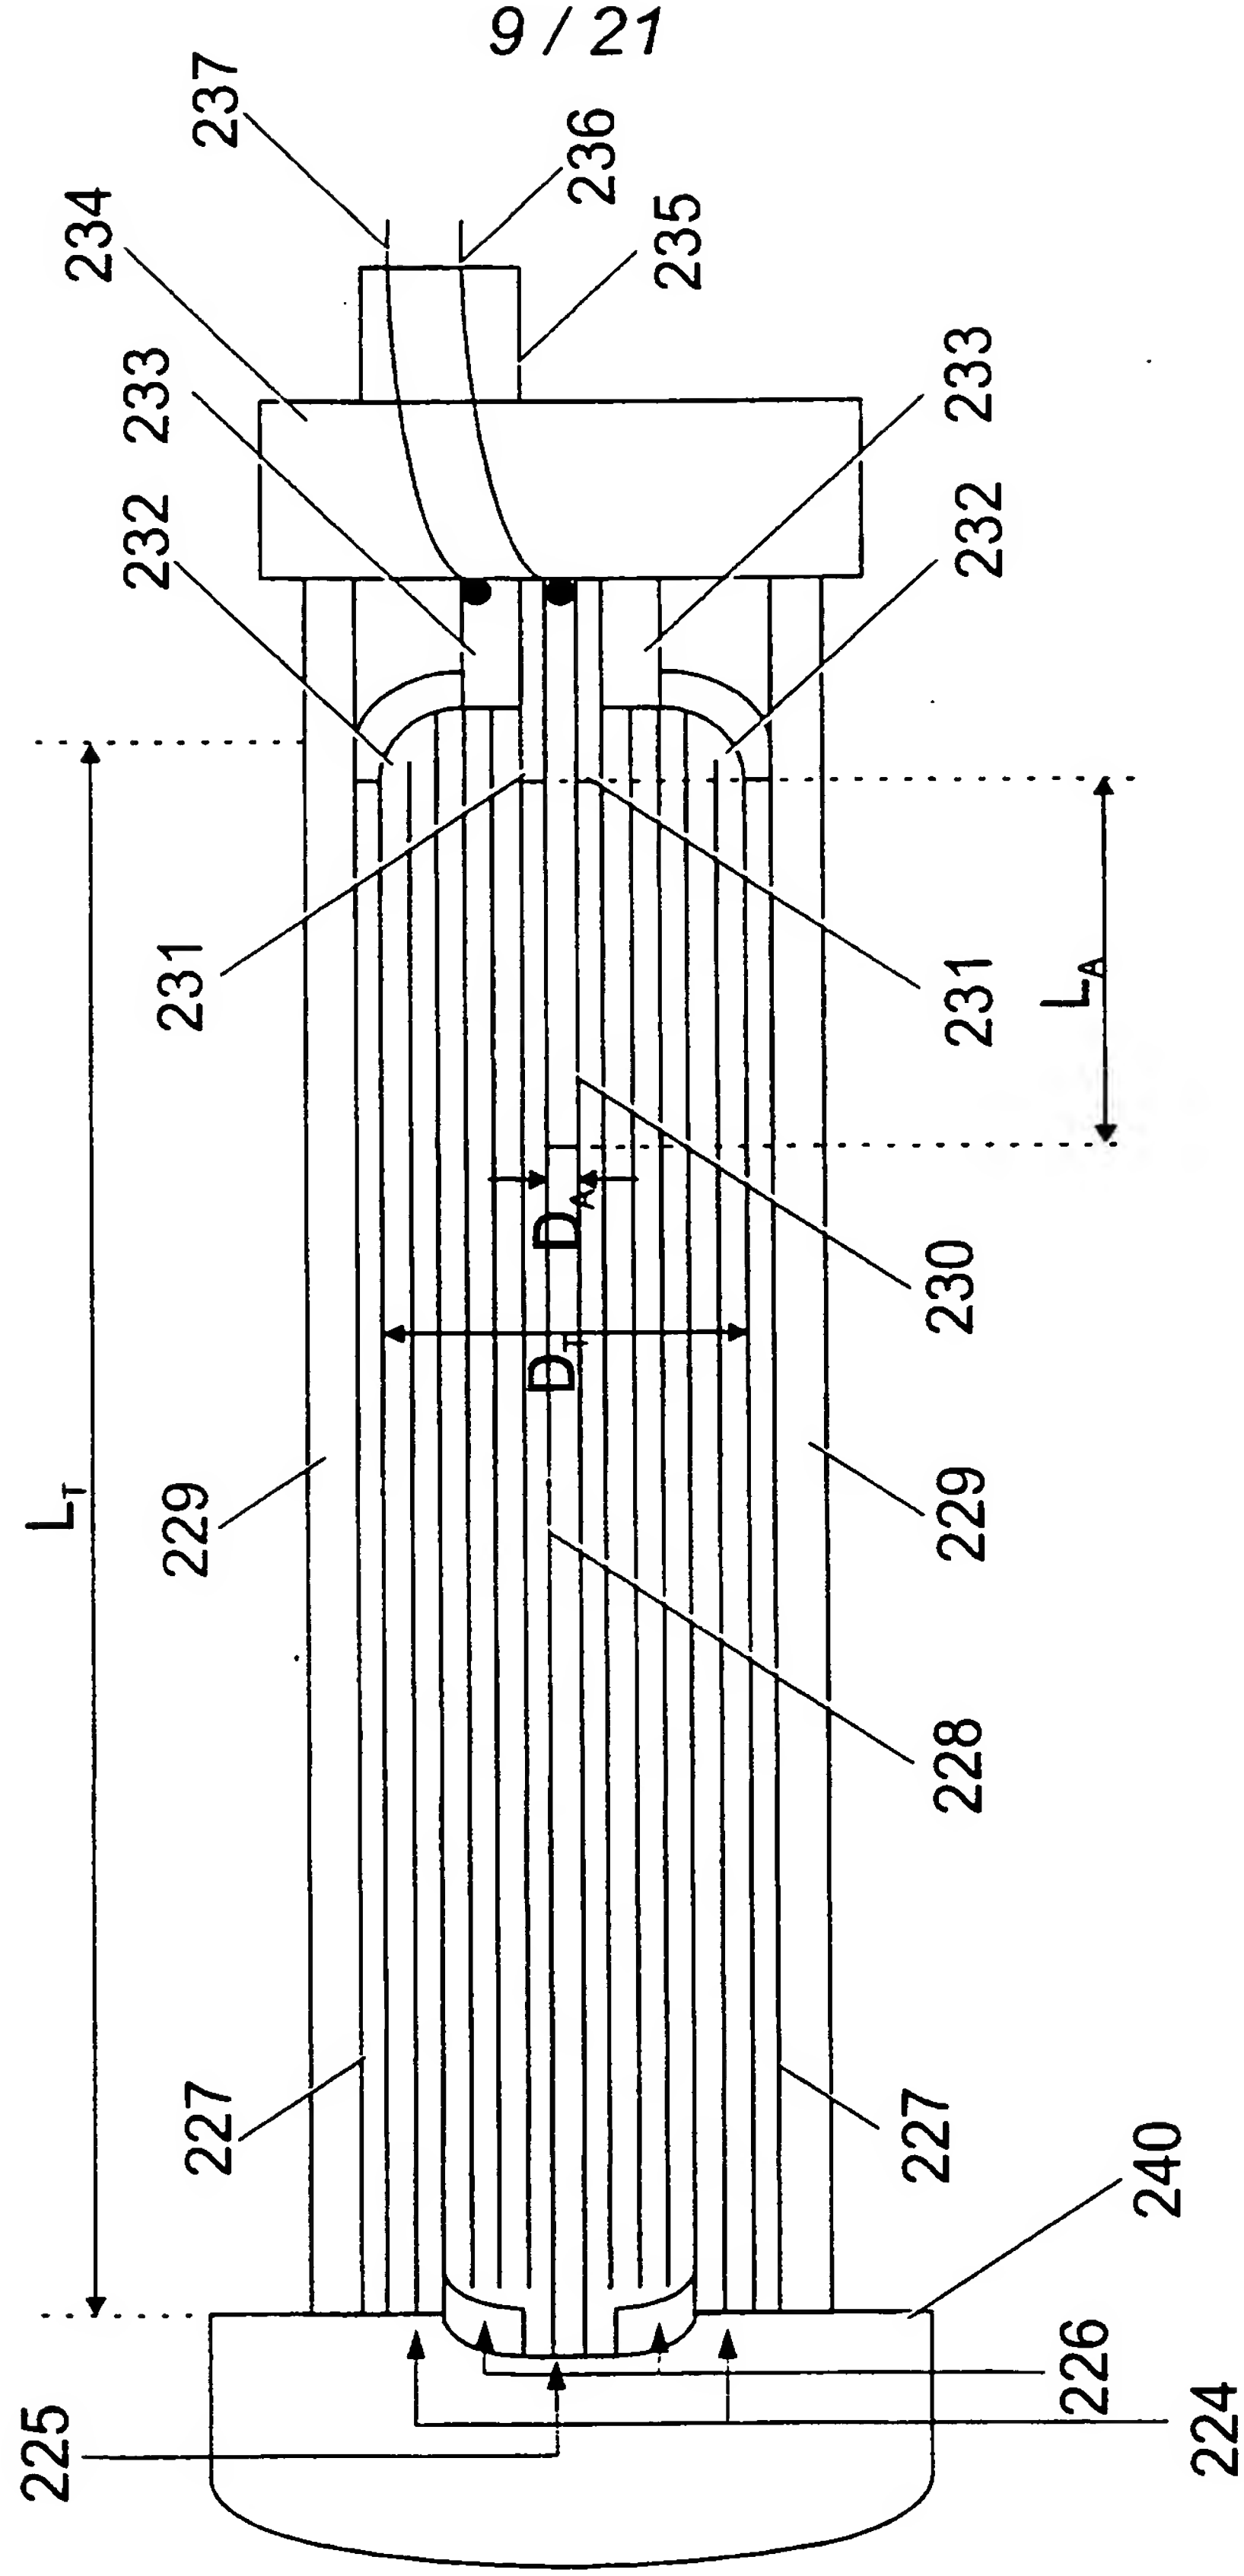
237
236
235
234
233
233
232
232
231
231
L_A
L_T
D_A
D_T
230
229
229
228
227
227
240
226
225
224

Fig. 5D

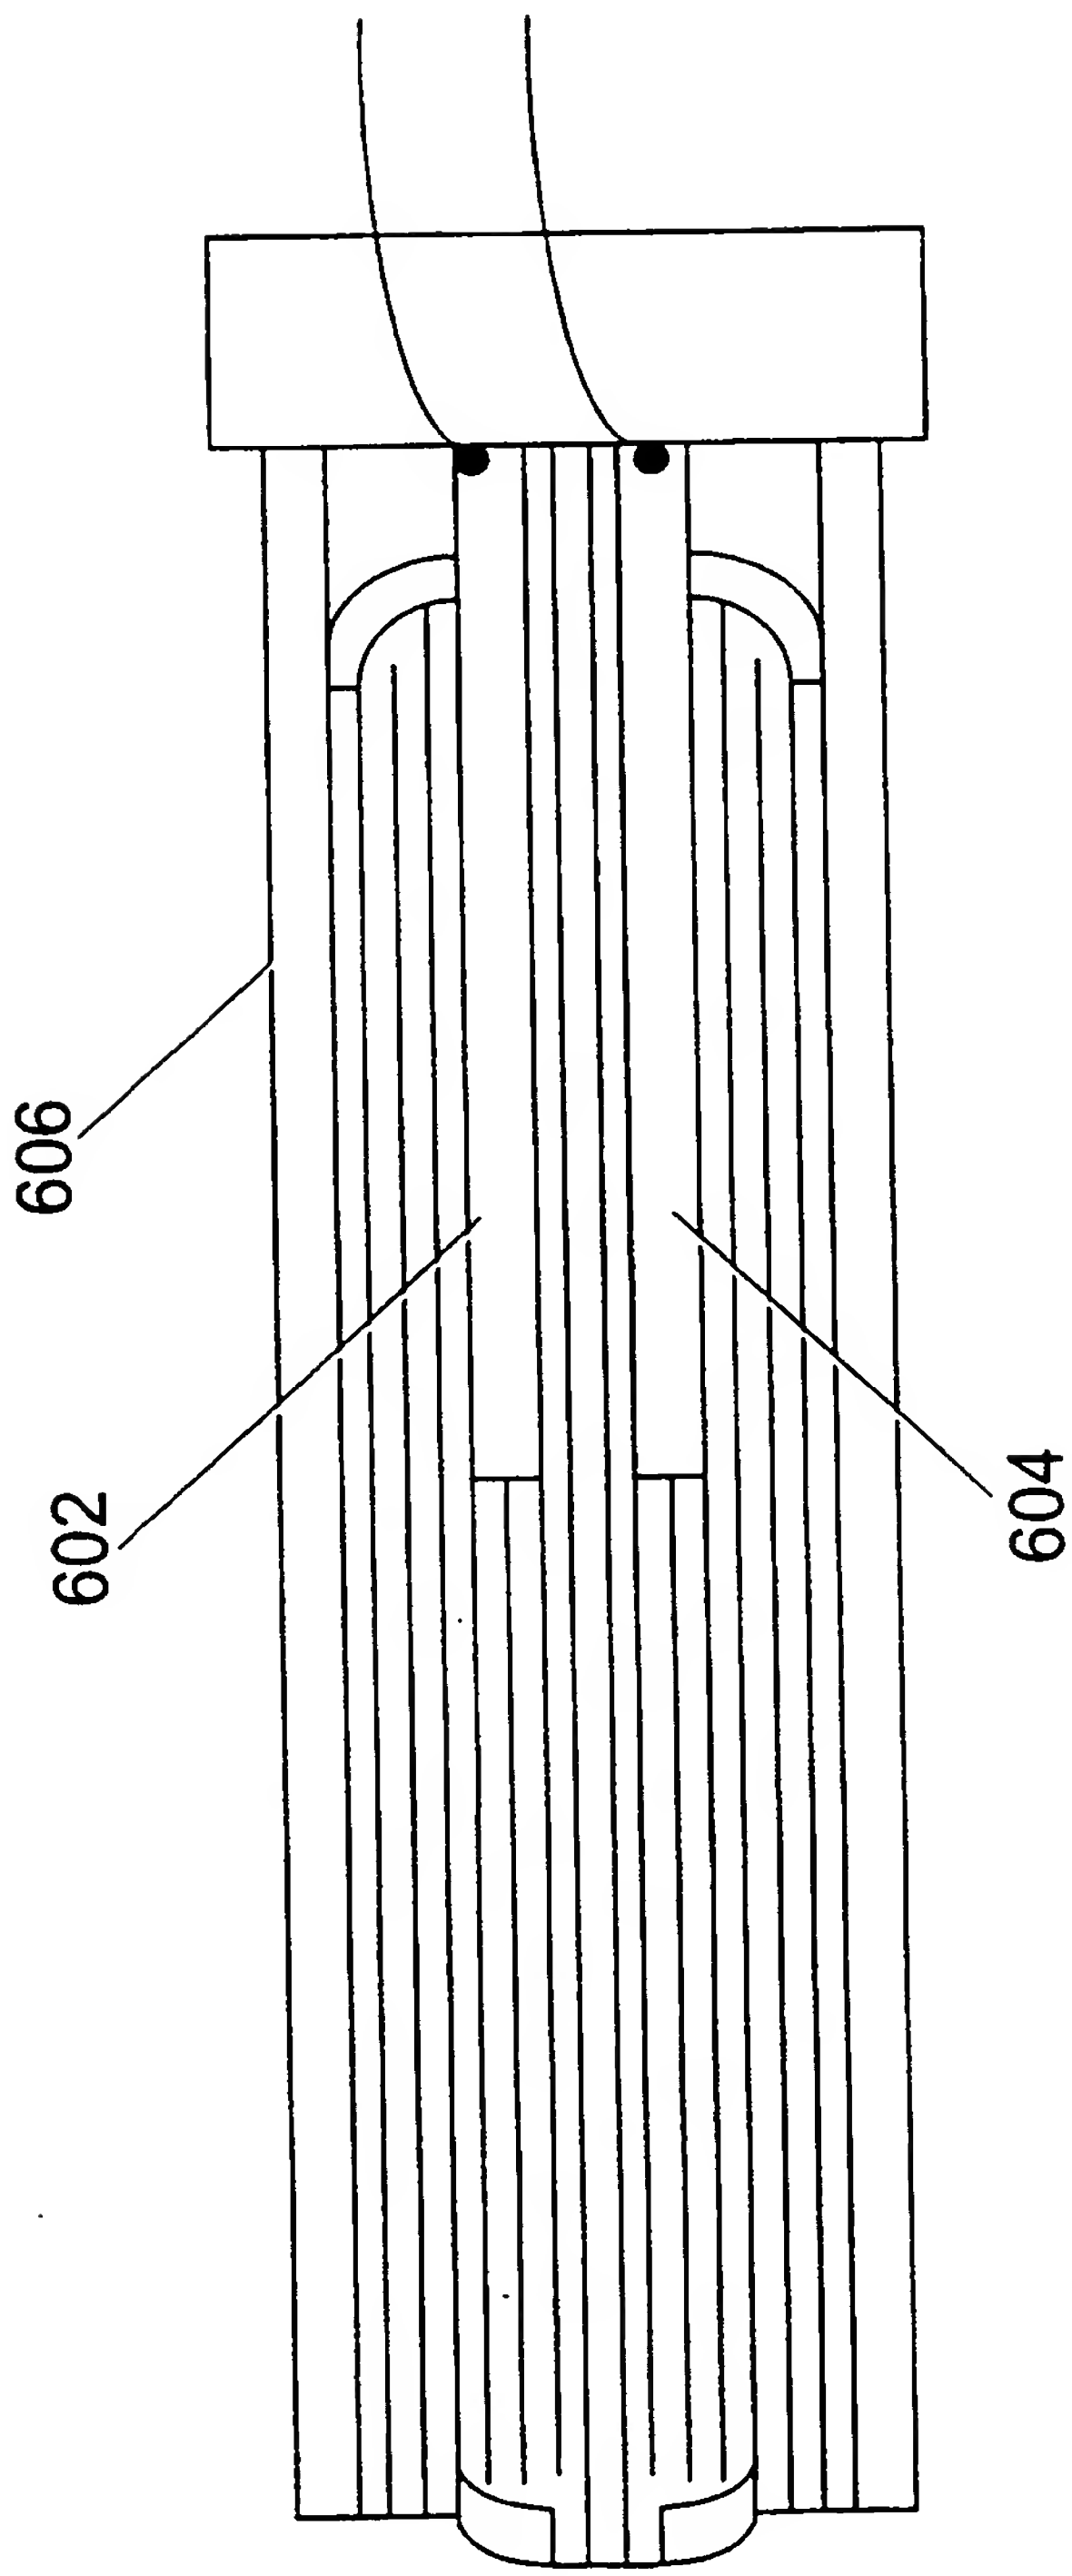

Fig. 5E

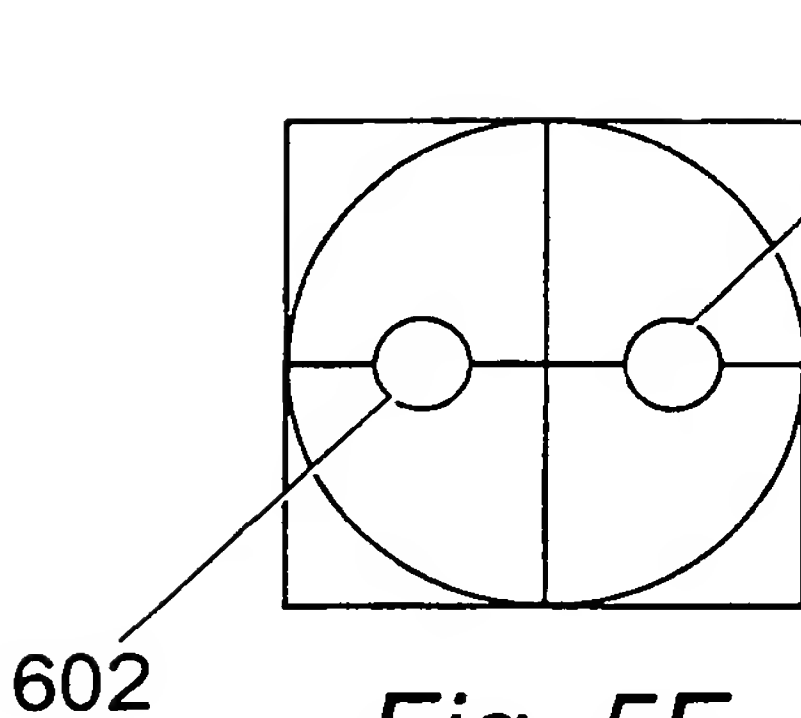

Fig. 5F



Fig. 5G



Fig. 5H

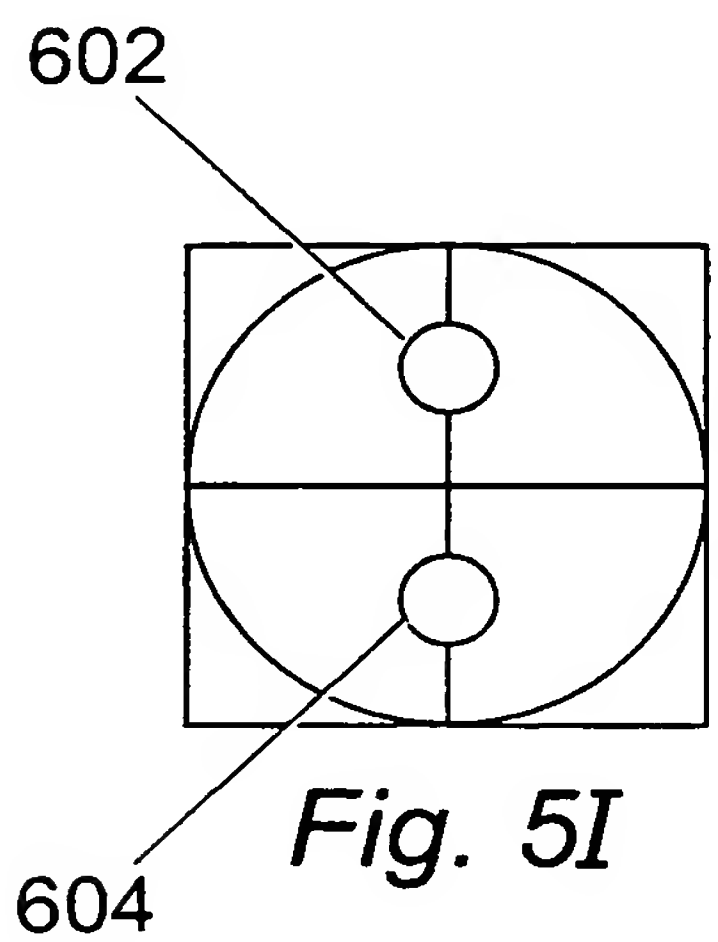

Fig. 5I



Fig. 5J



Fig. 5K



Fig. 5L



Fig. 5M



Fig. 5N

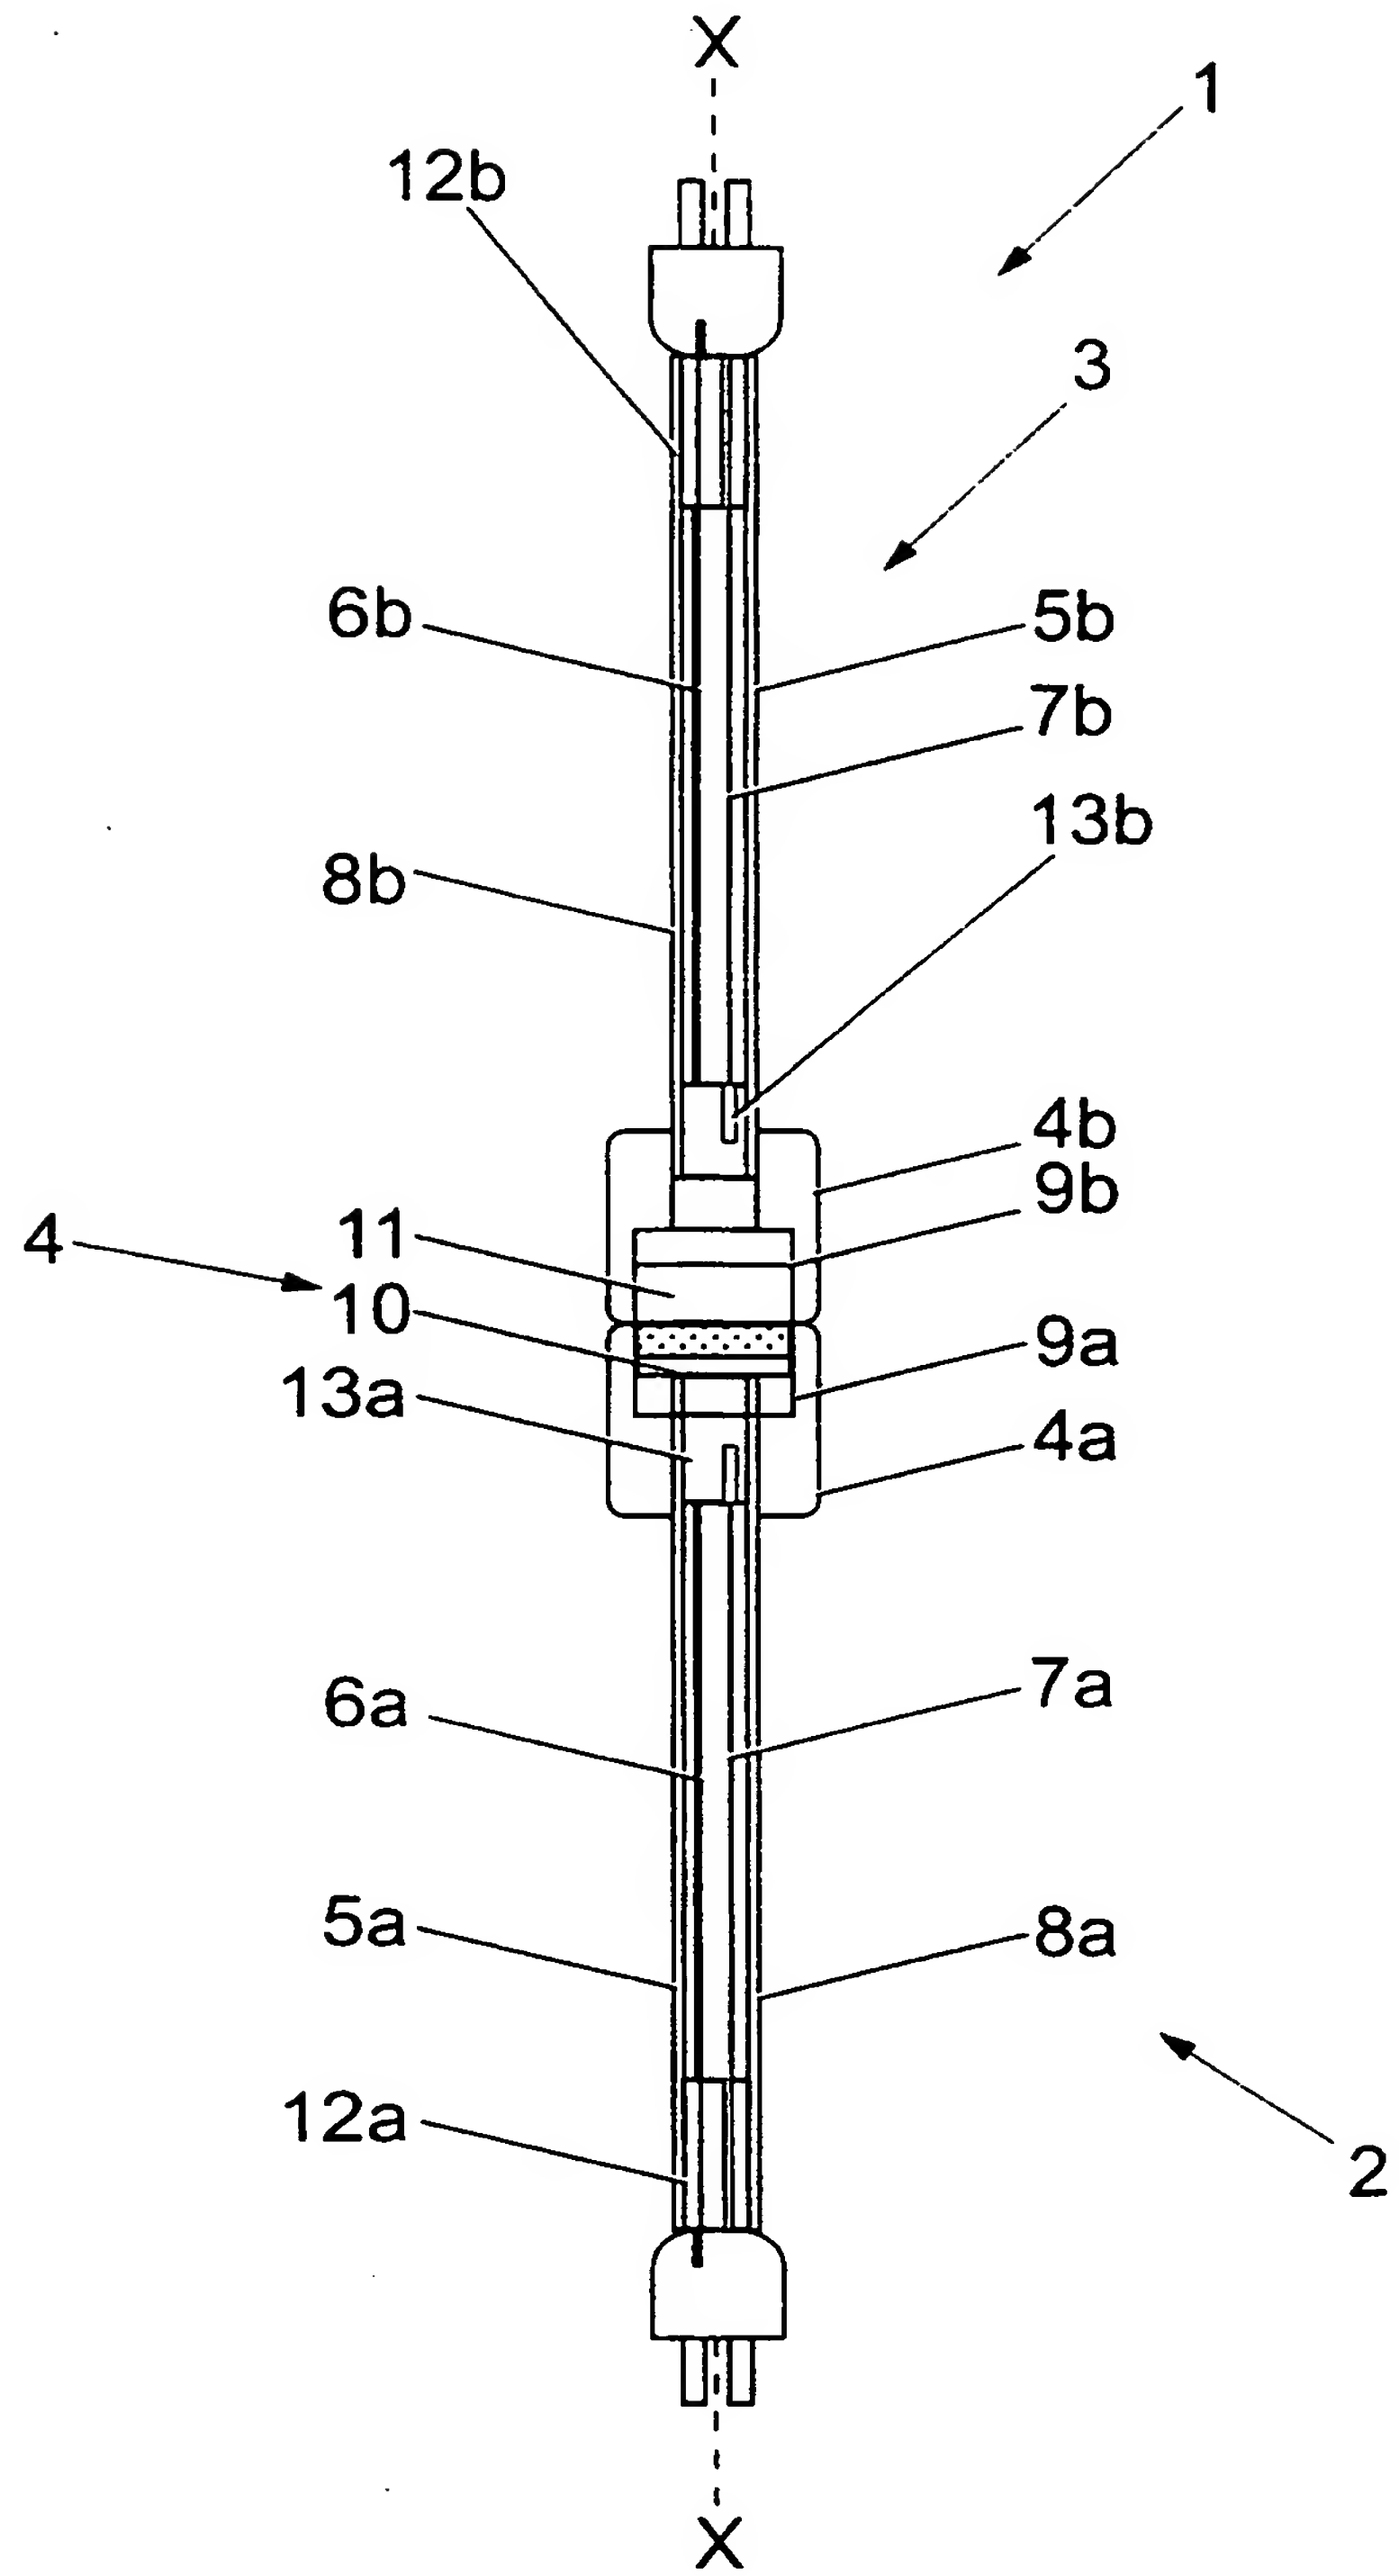

Fig. 6A

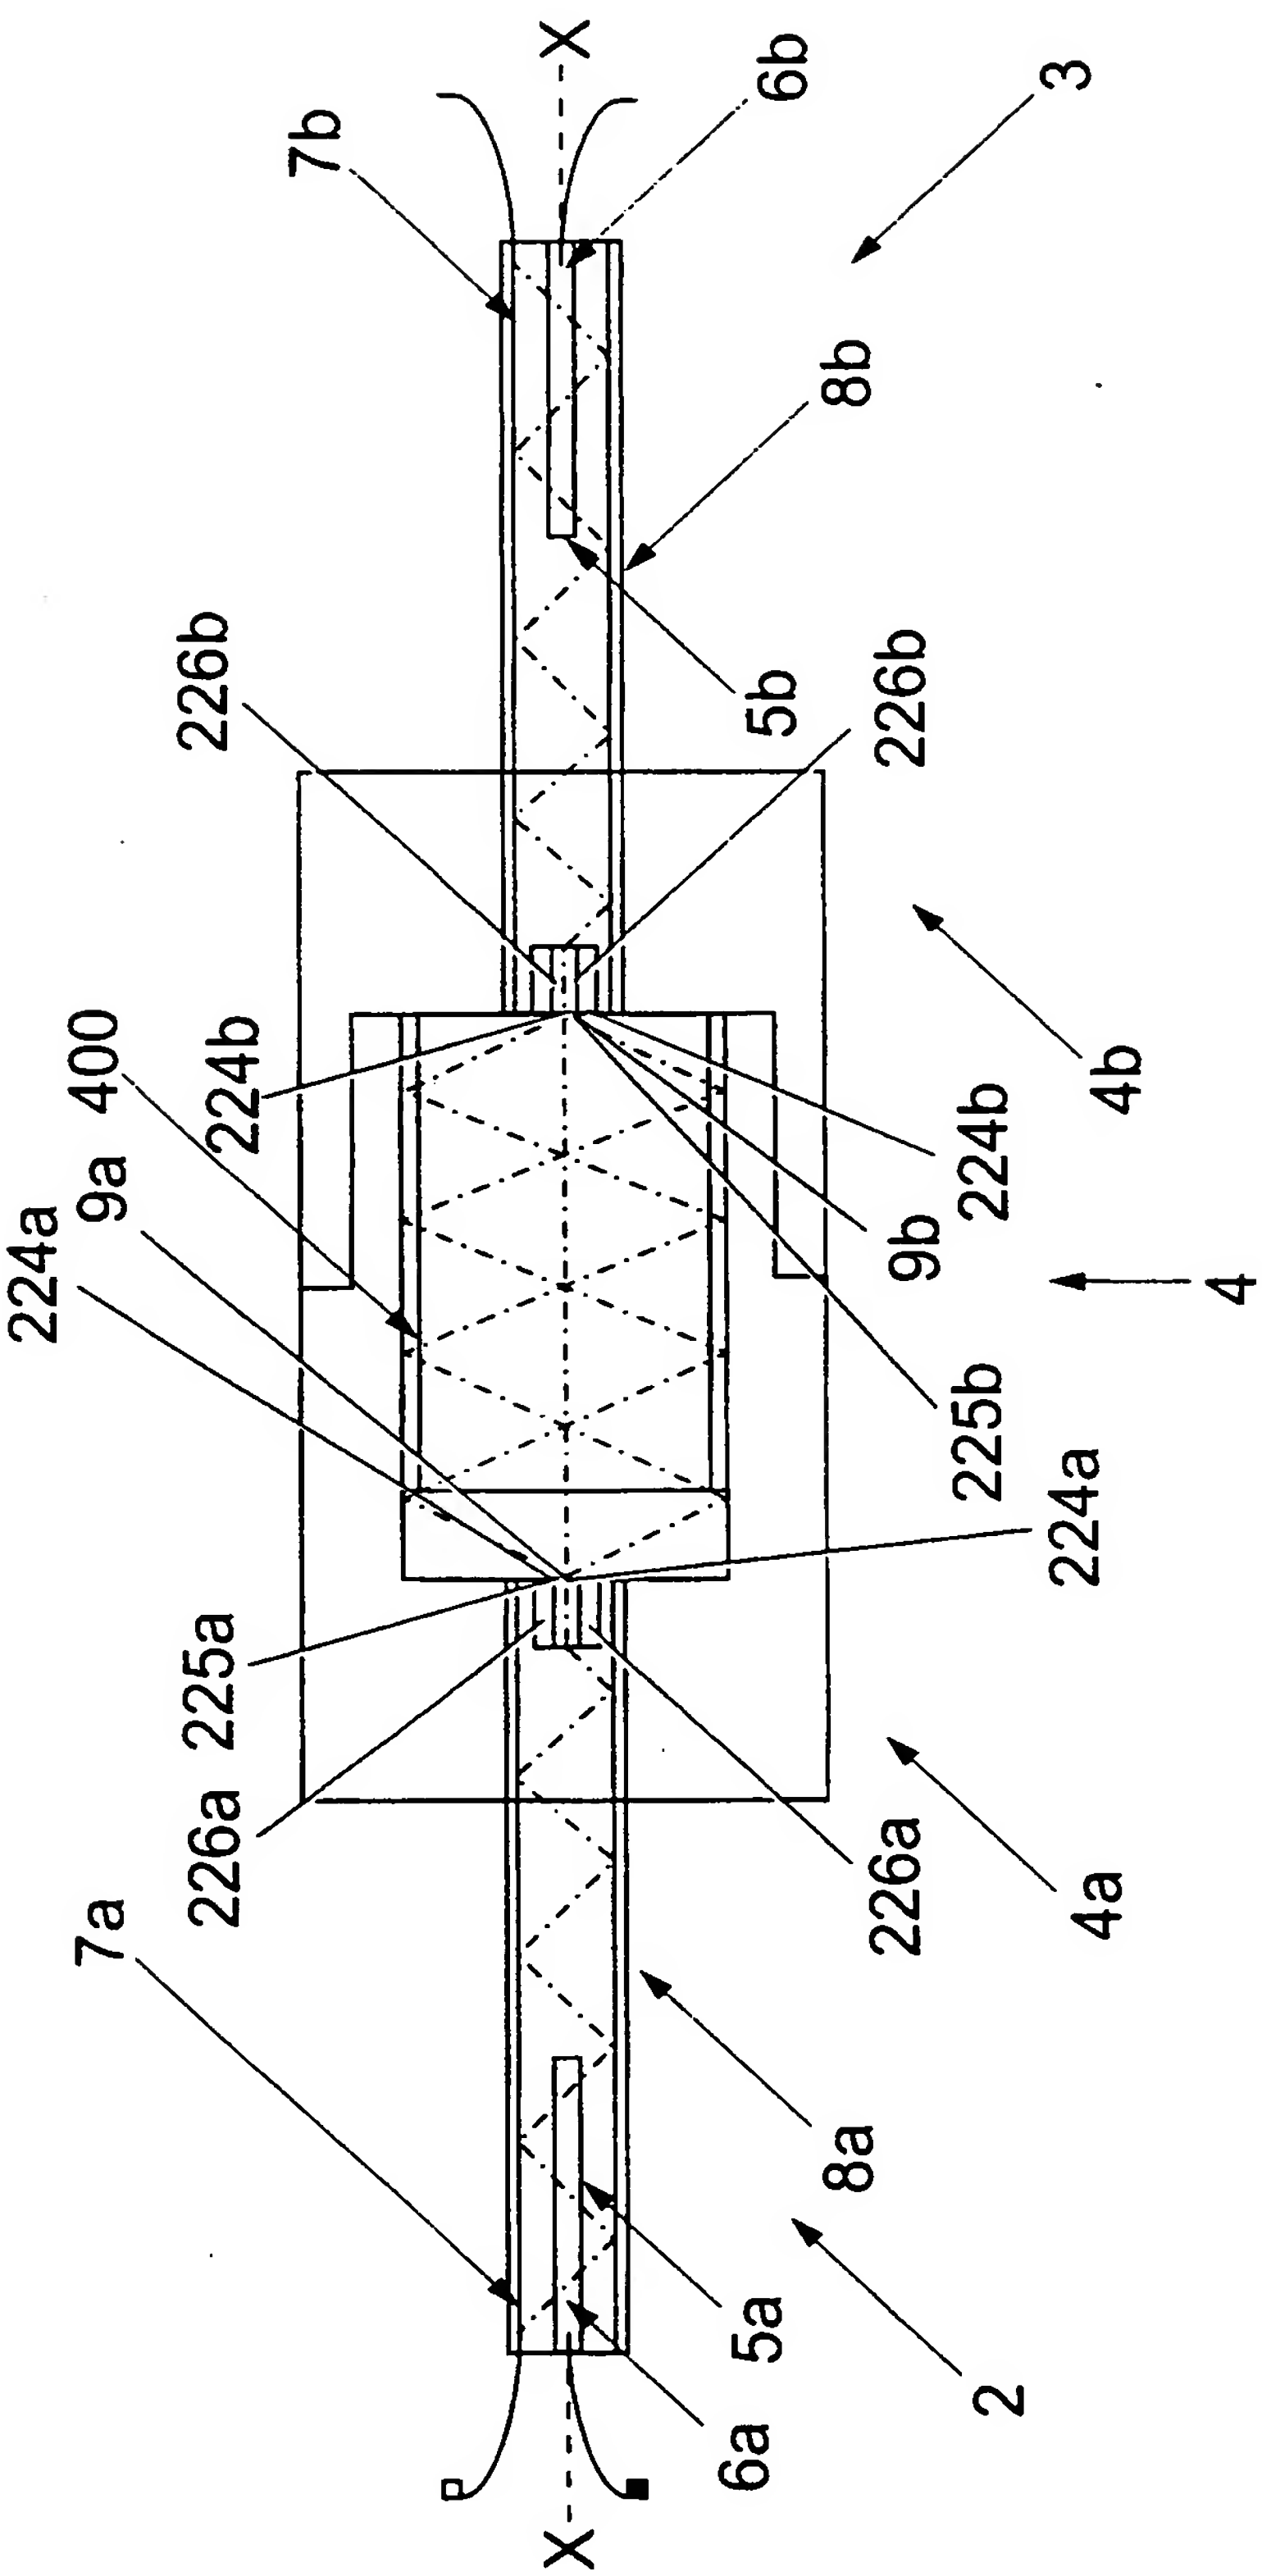
X
7b
6b
3
8b
5b
226b
226b
224b
400
9a
224a
9b
224b
4b
4
225b
224a
225a
226a
226a
4a
7a
8a
5a
6a
2
X

Fig. 6B

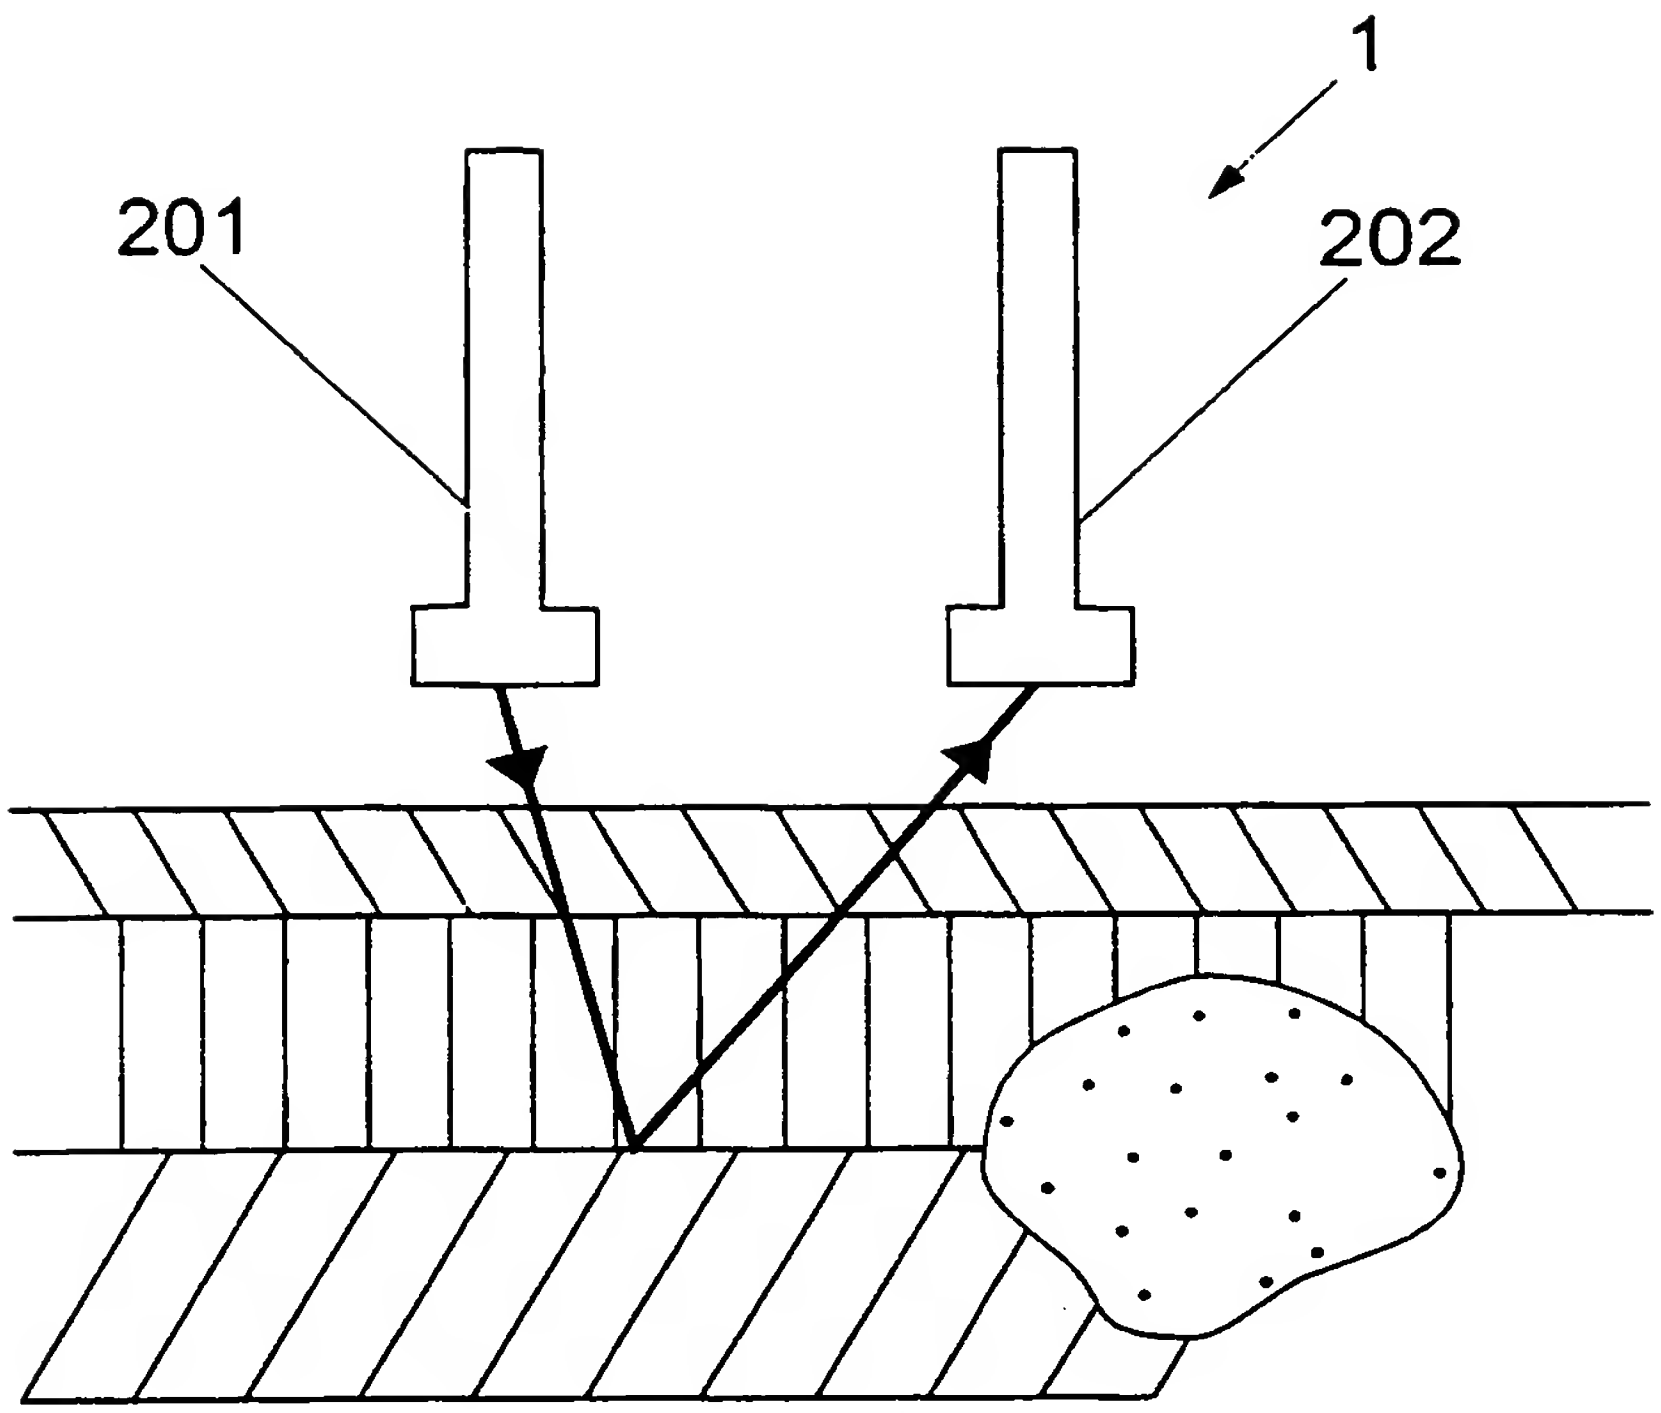

Fig. 7A

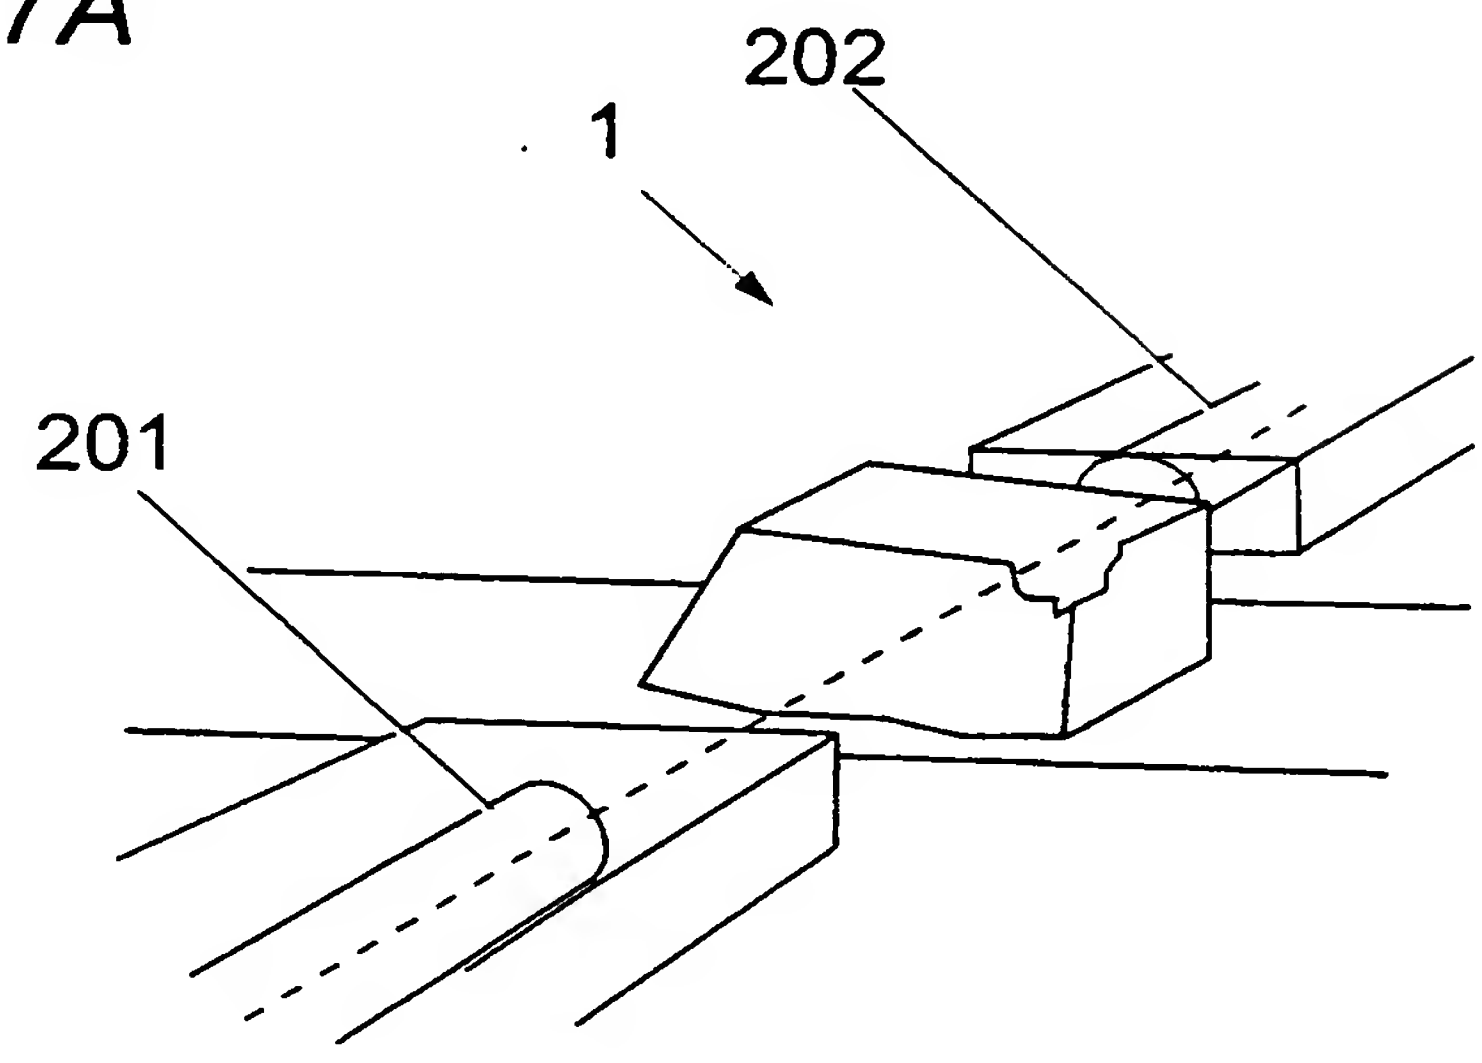

Fig. 7B

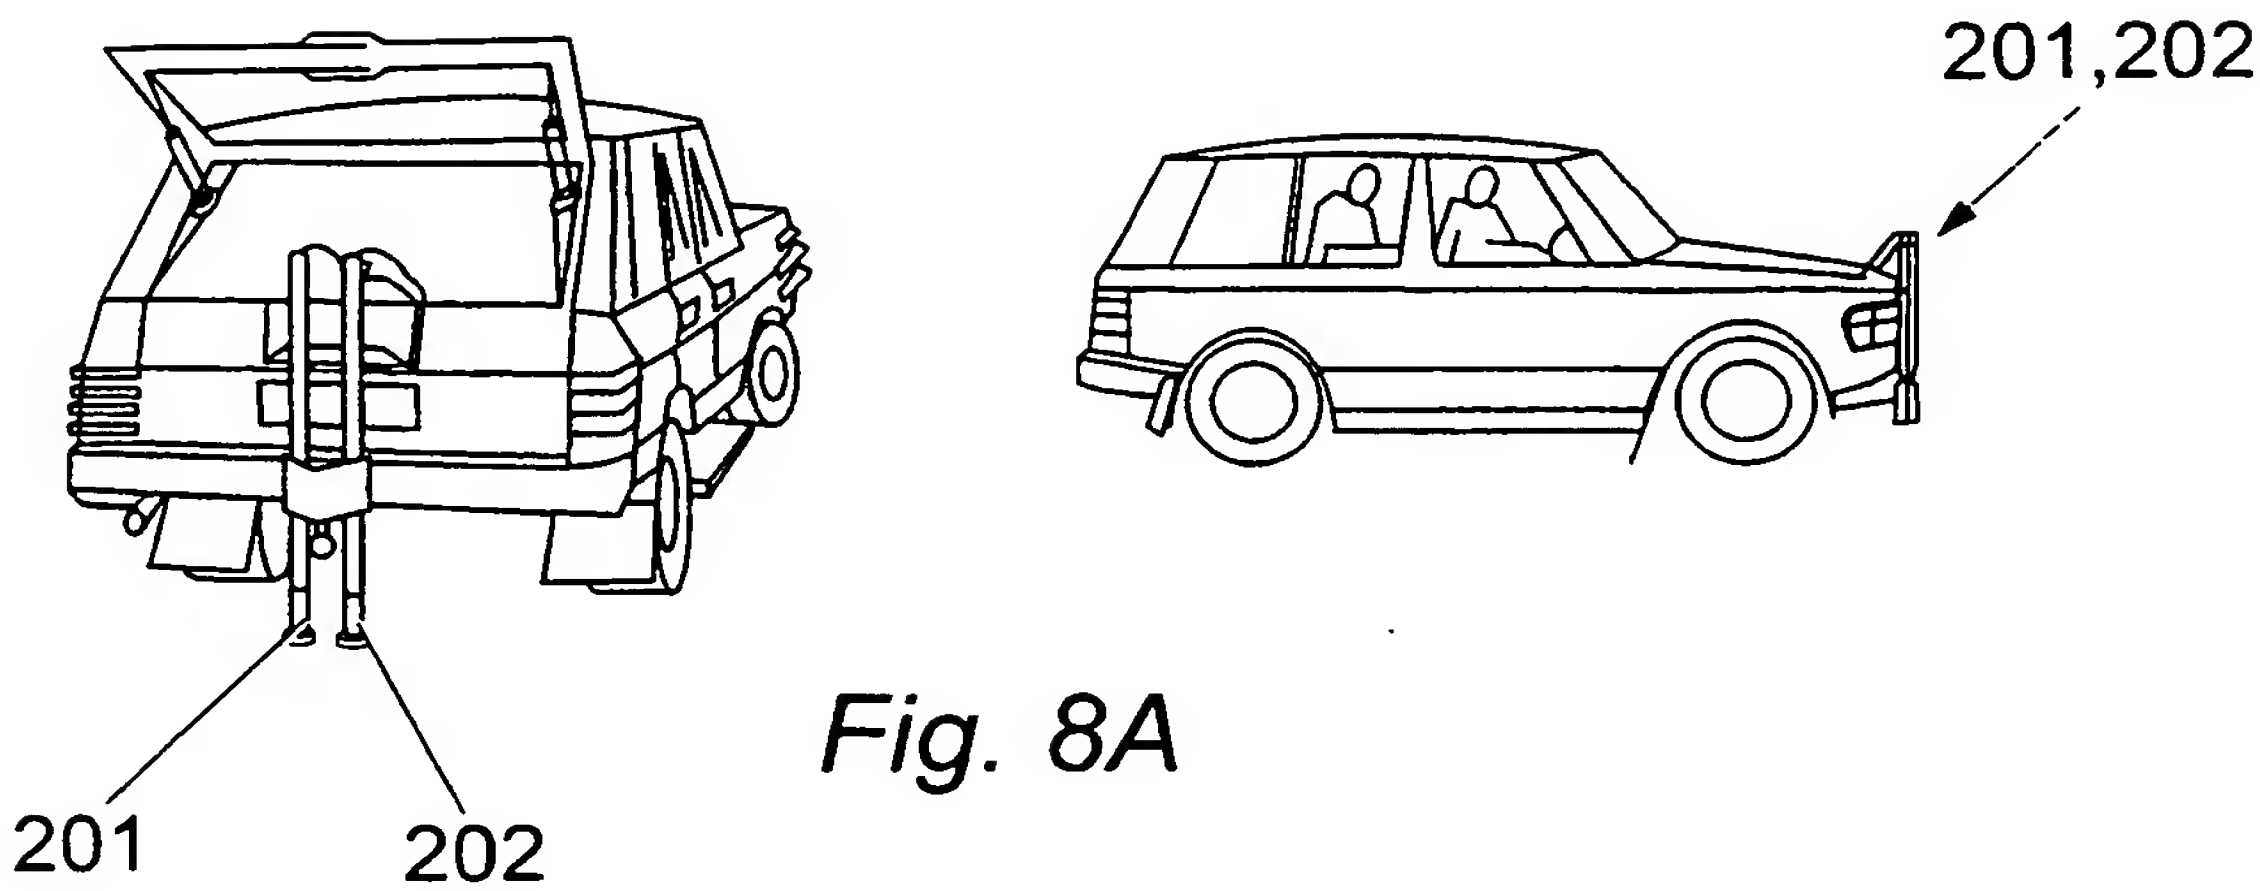

Fig. 8A

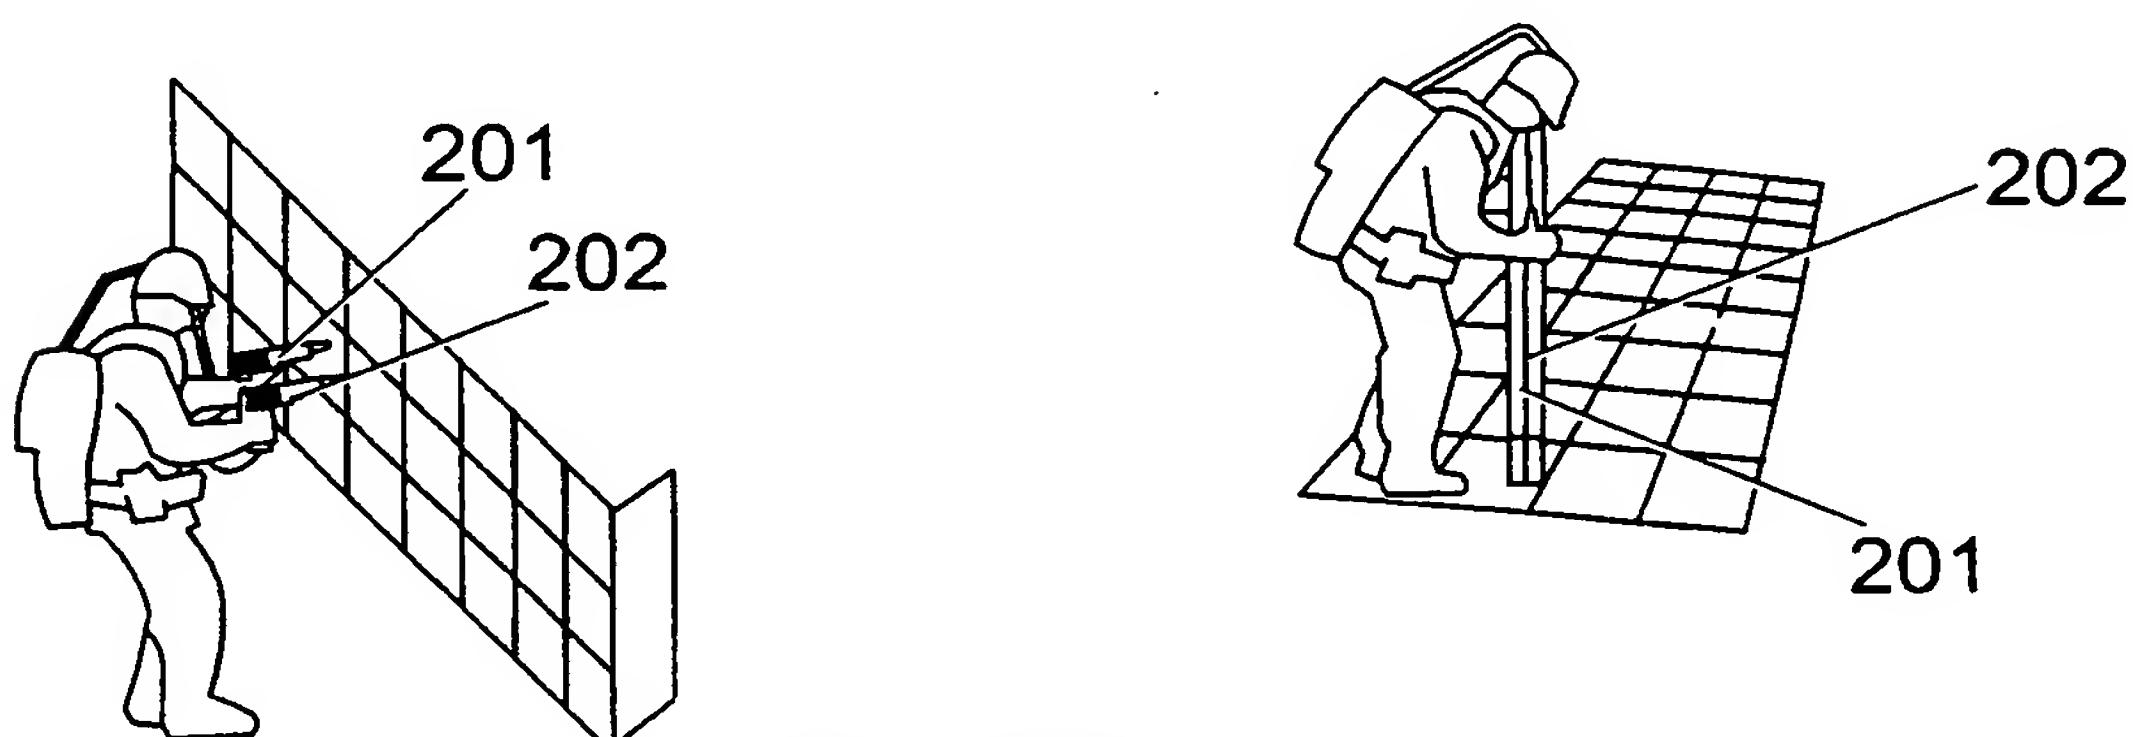

Fig. 8B

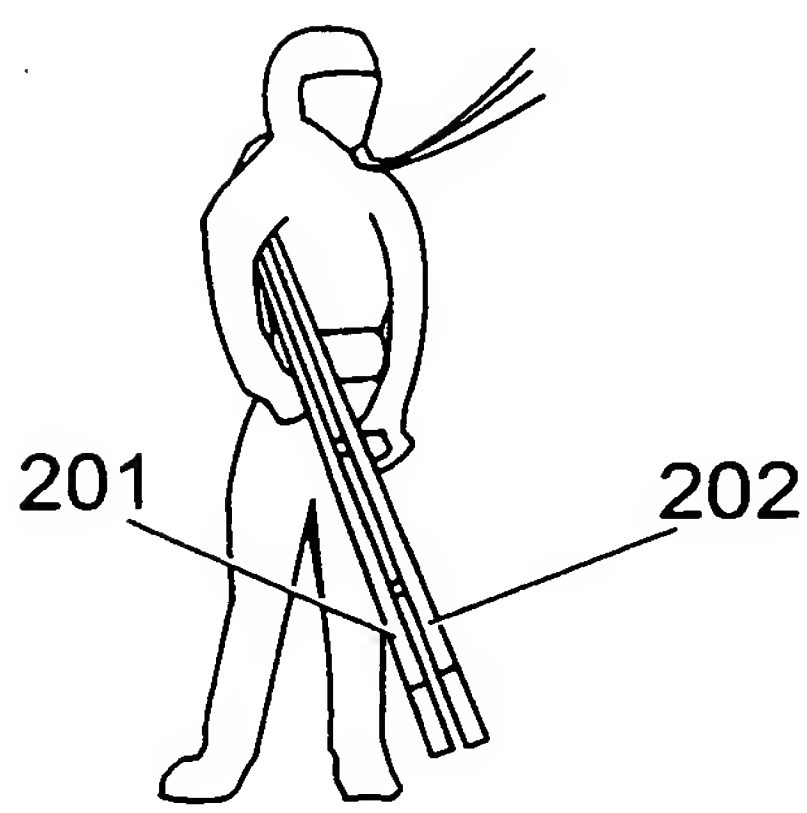

Fig. 8C

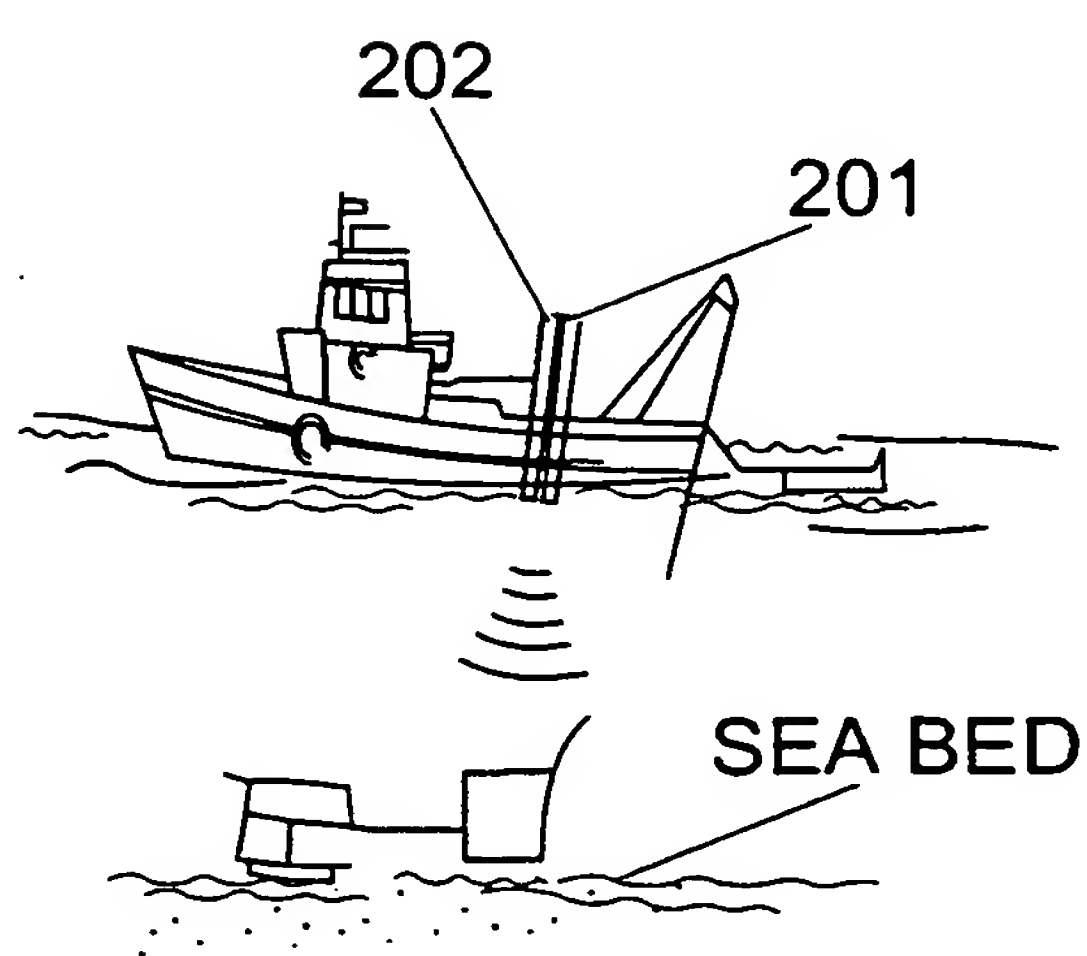

Fig. 8D

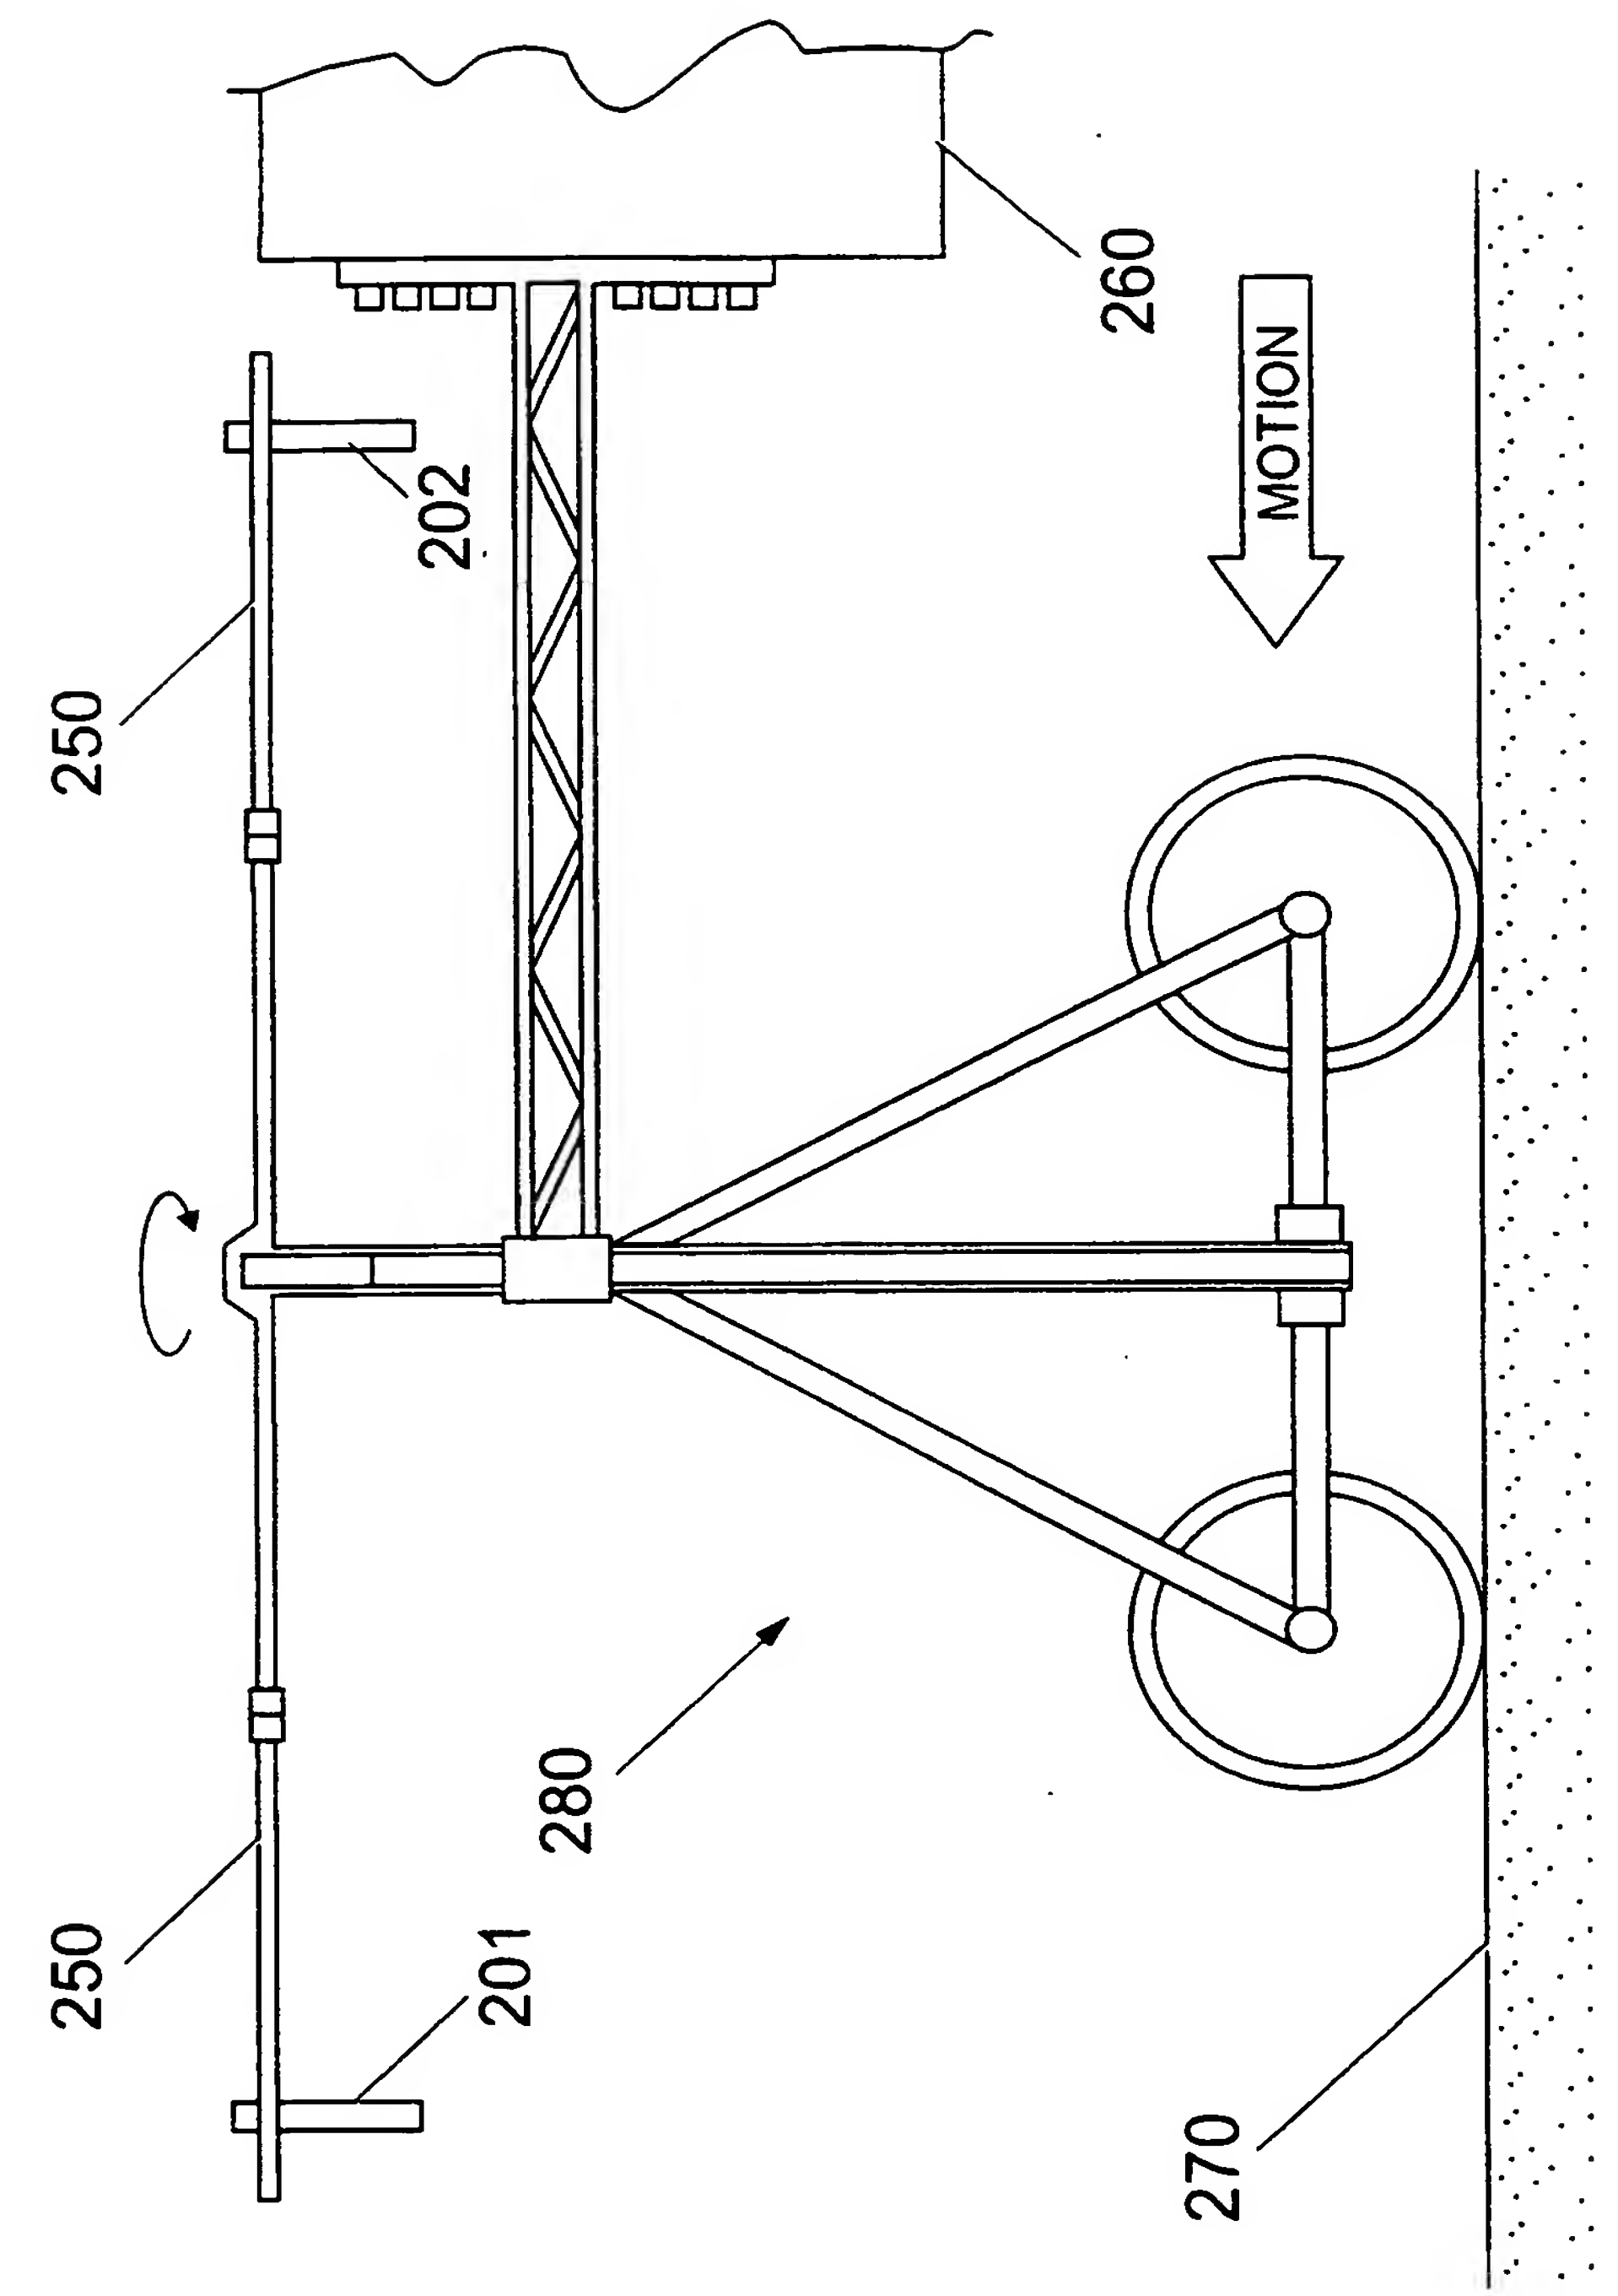

Fig. 9

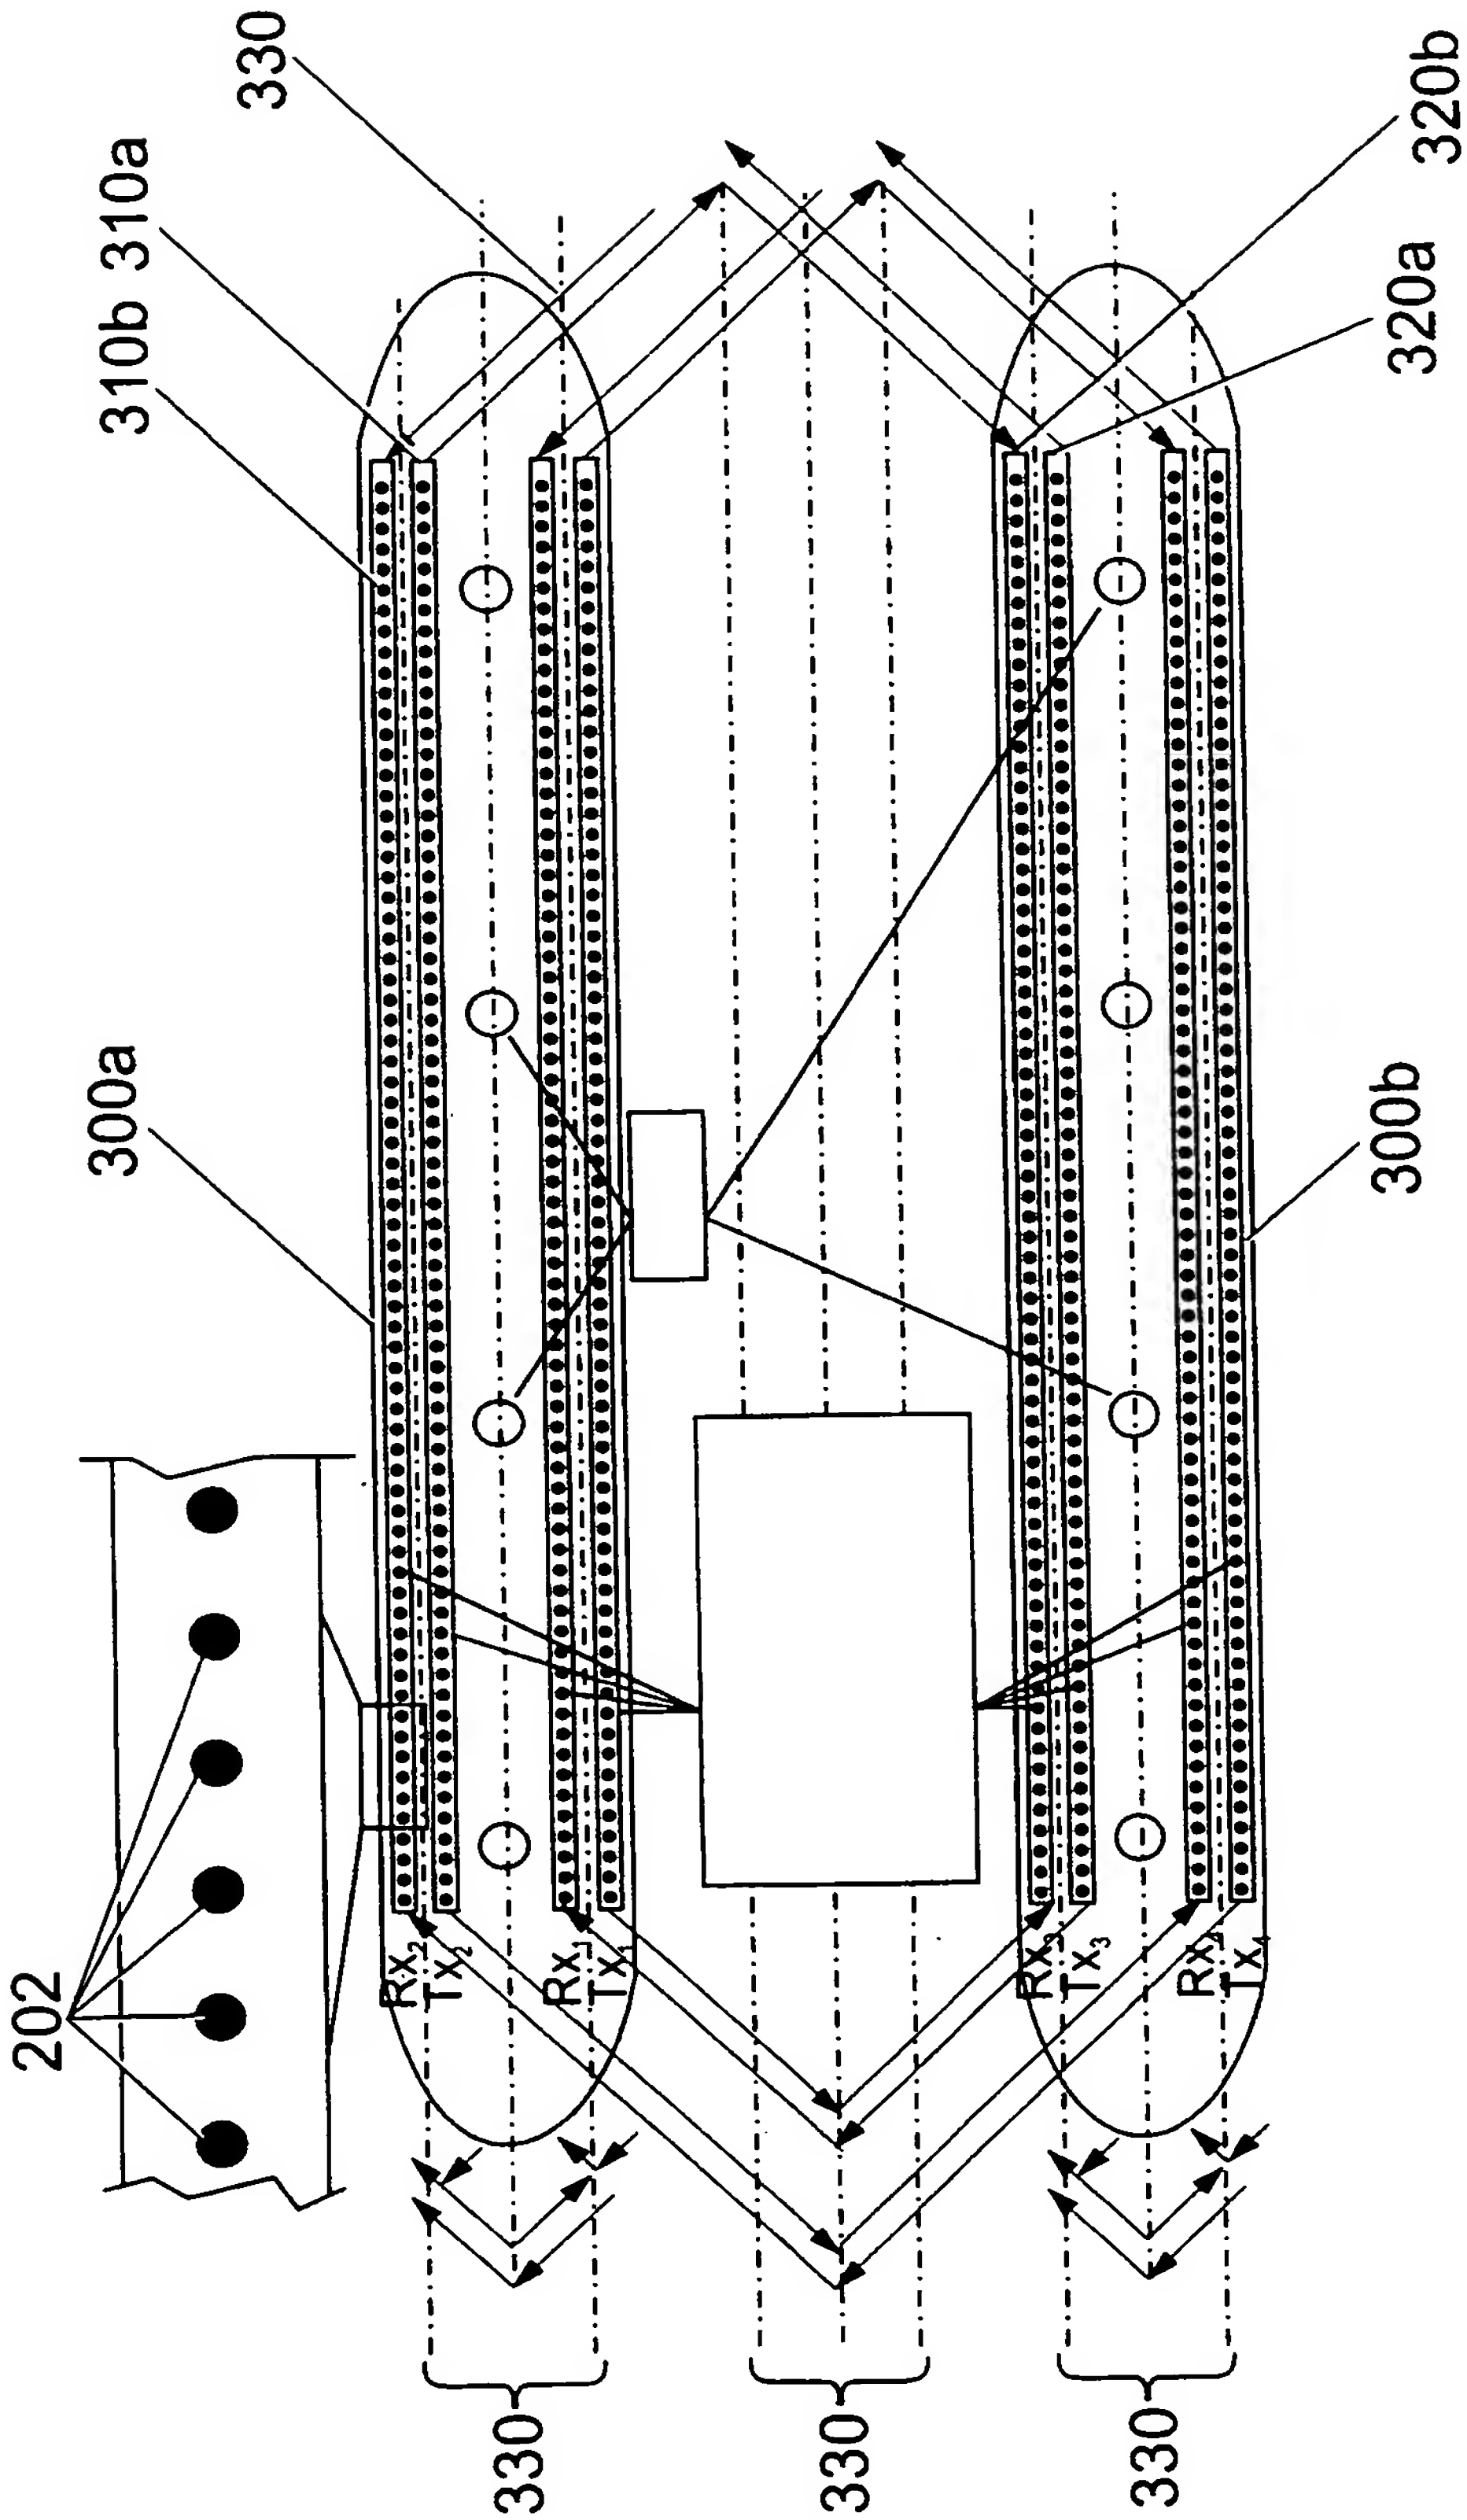

Fig. 10

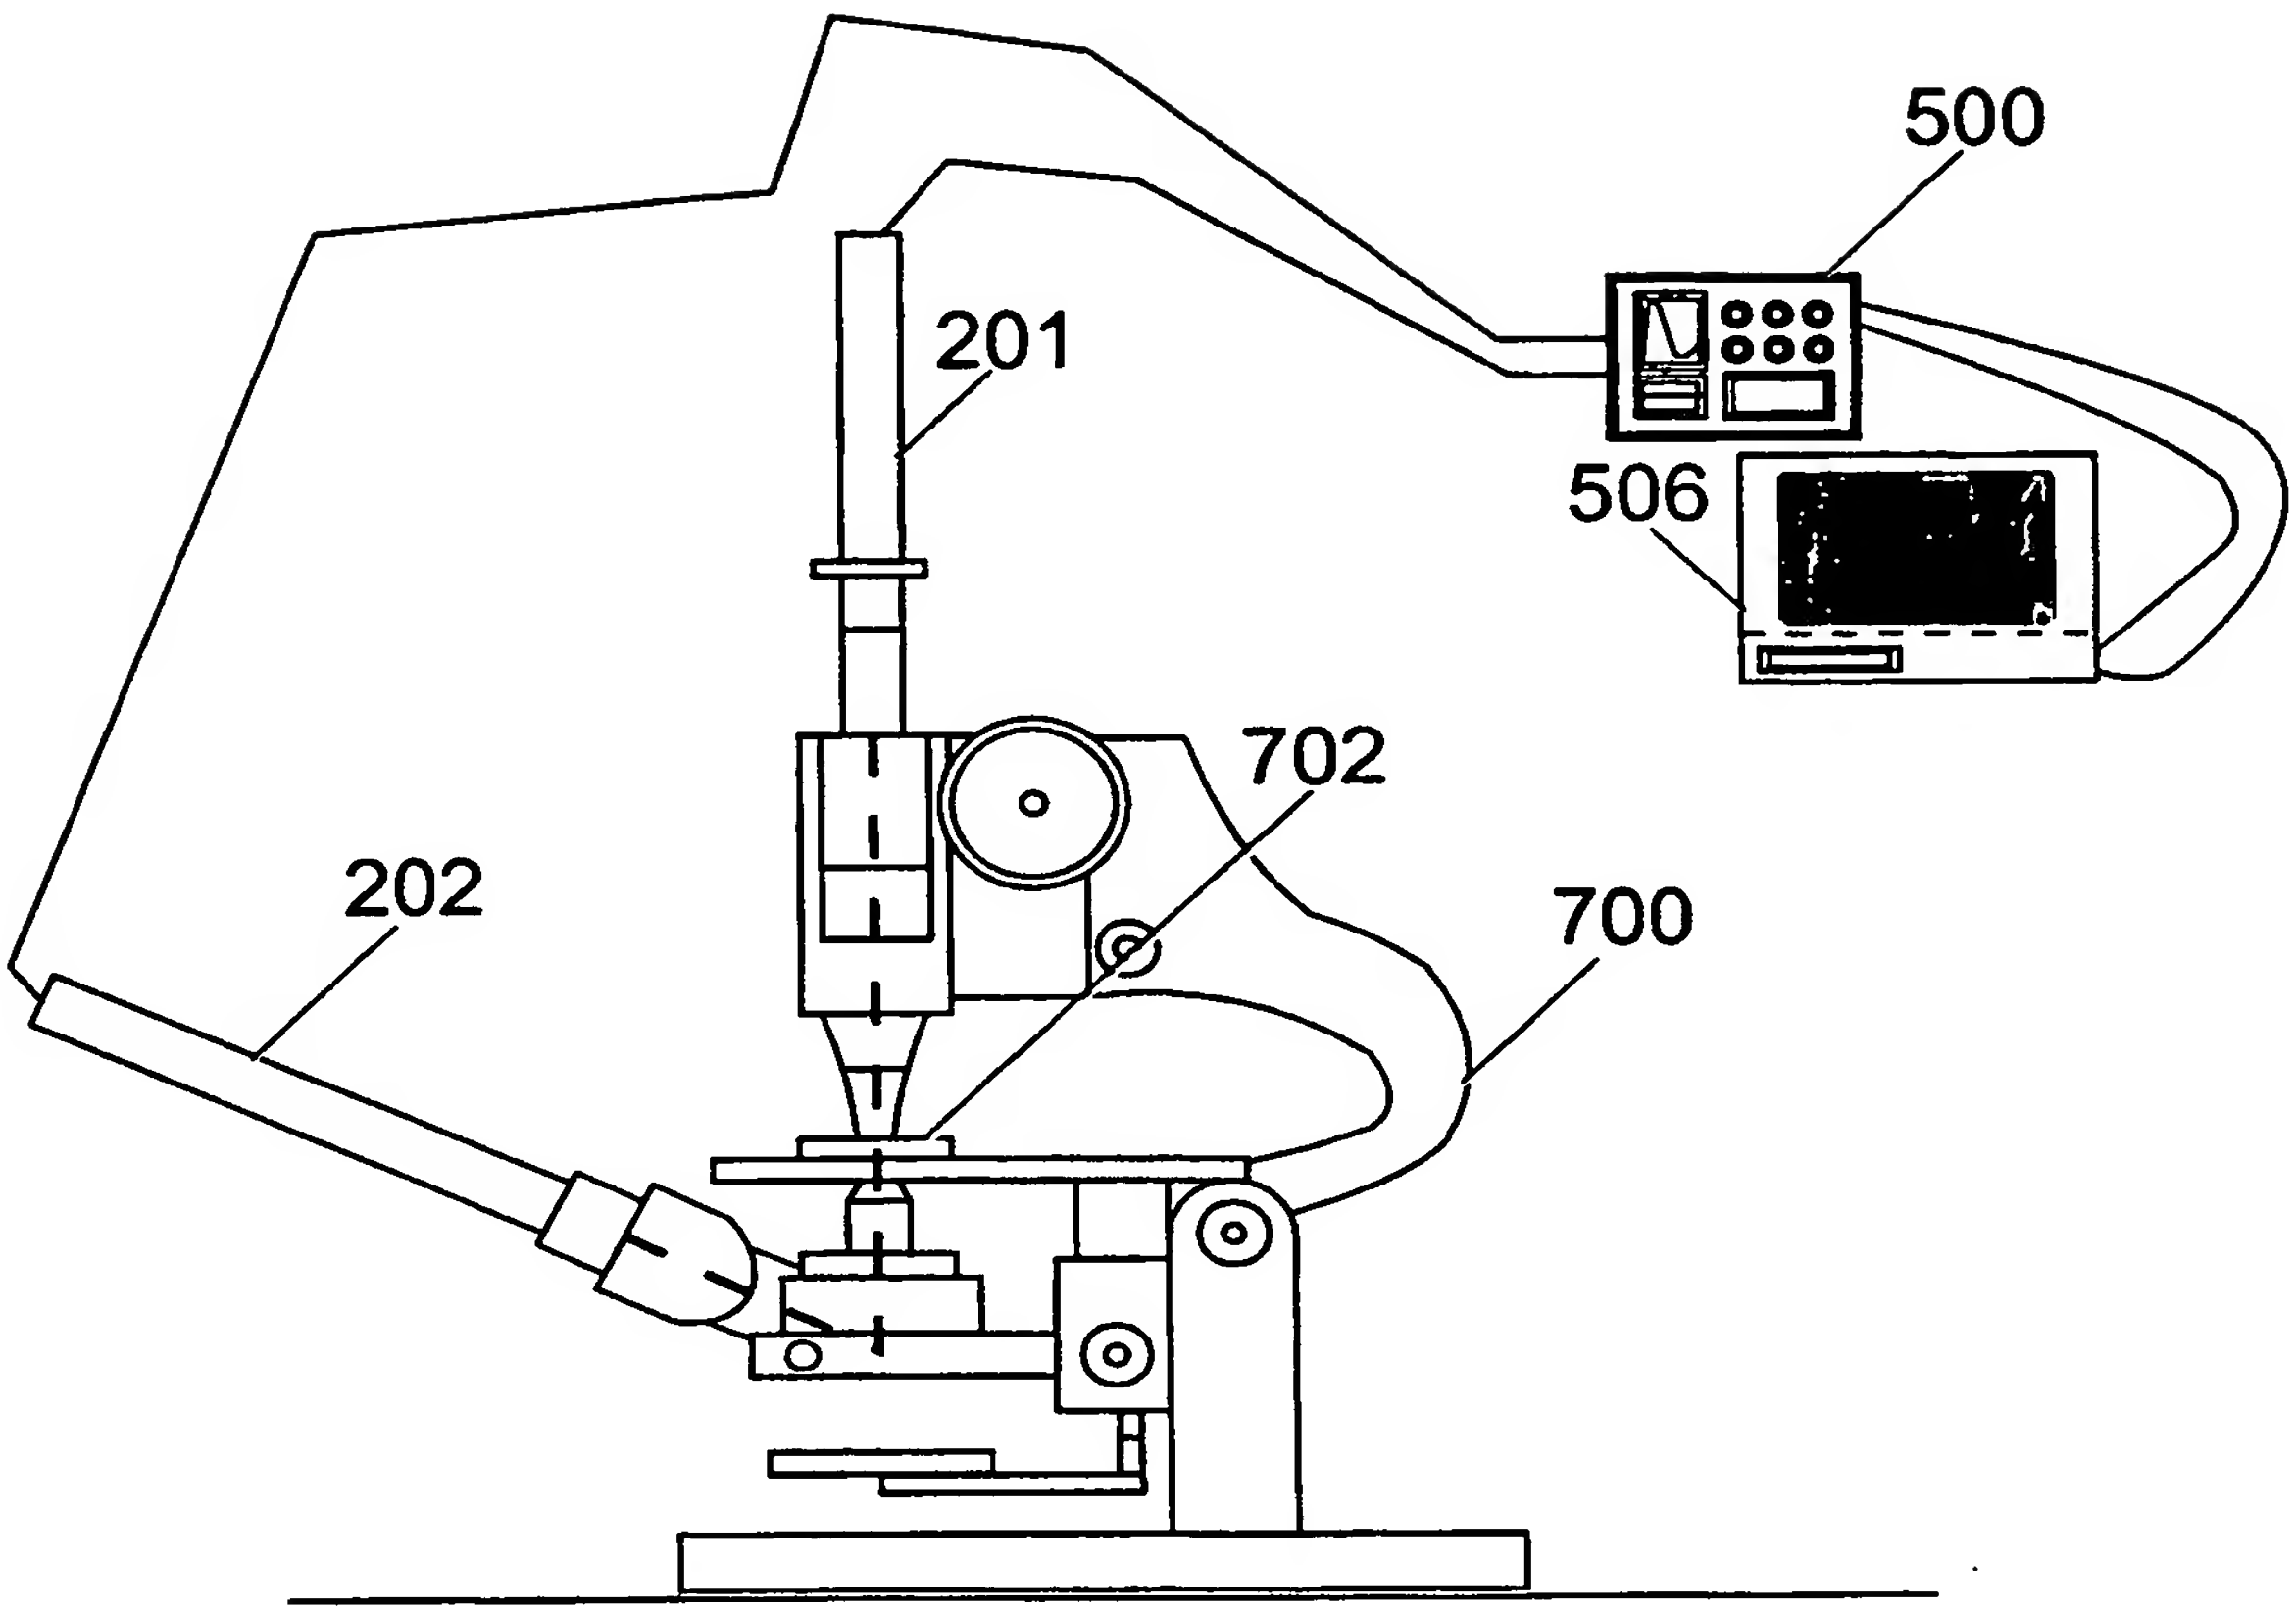

Fig. 11A

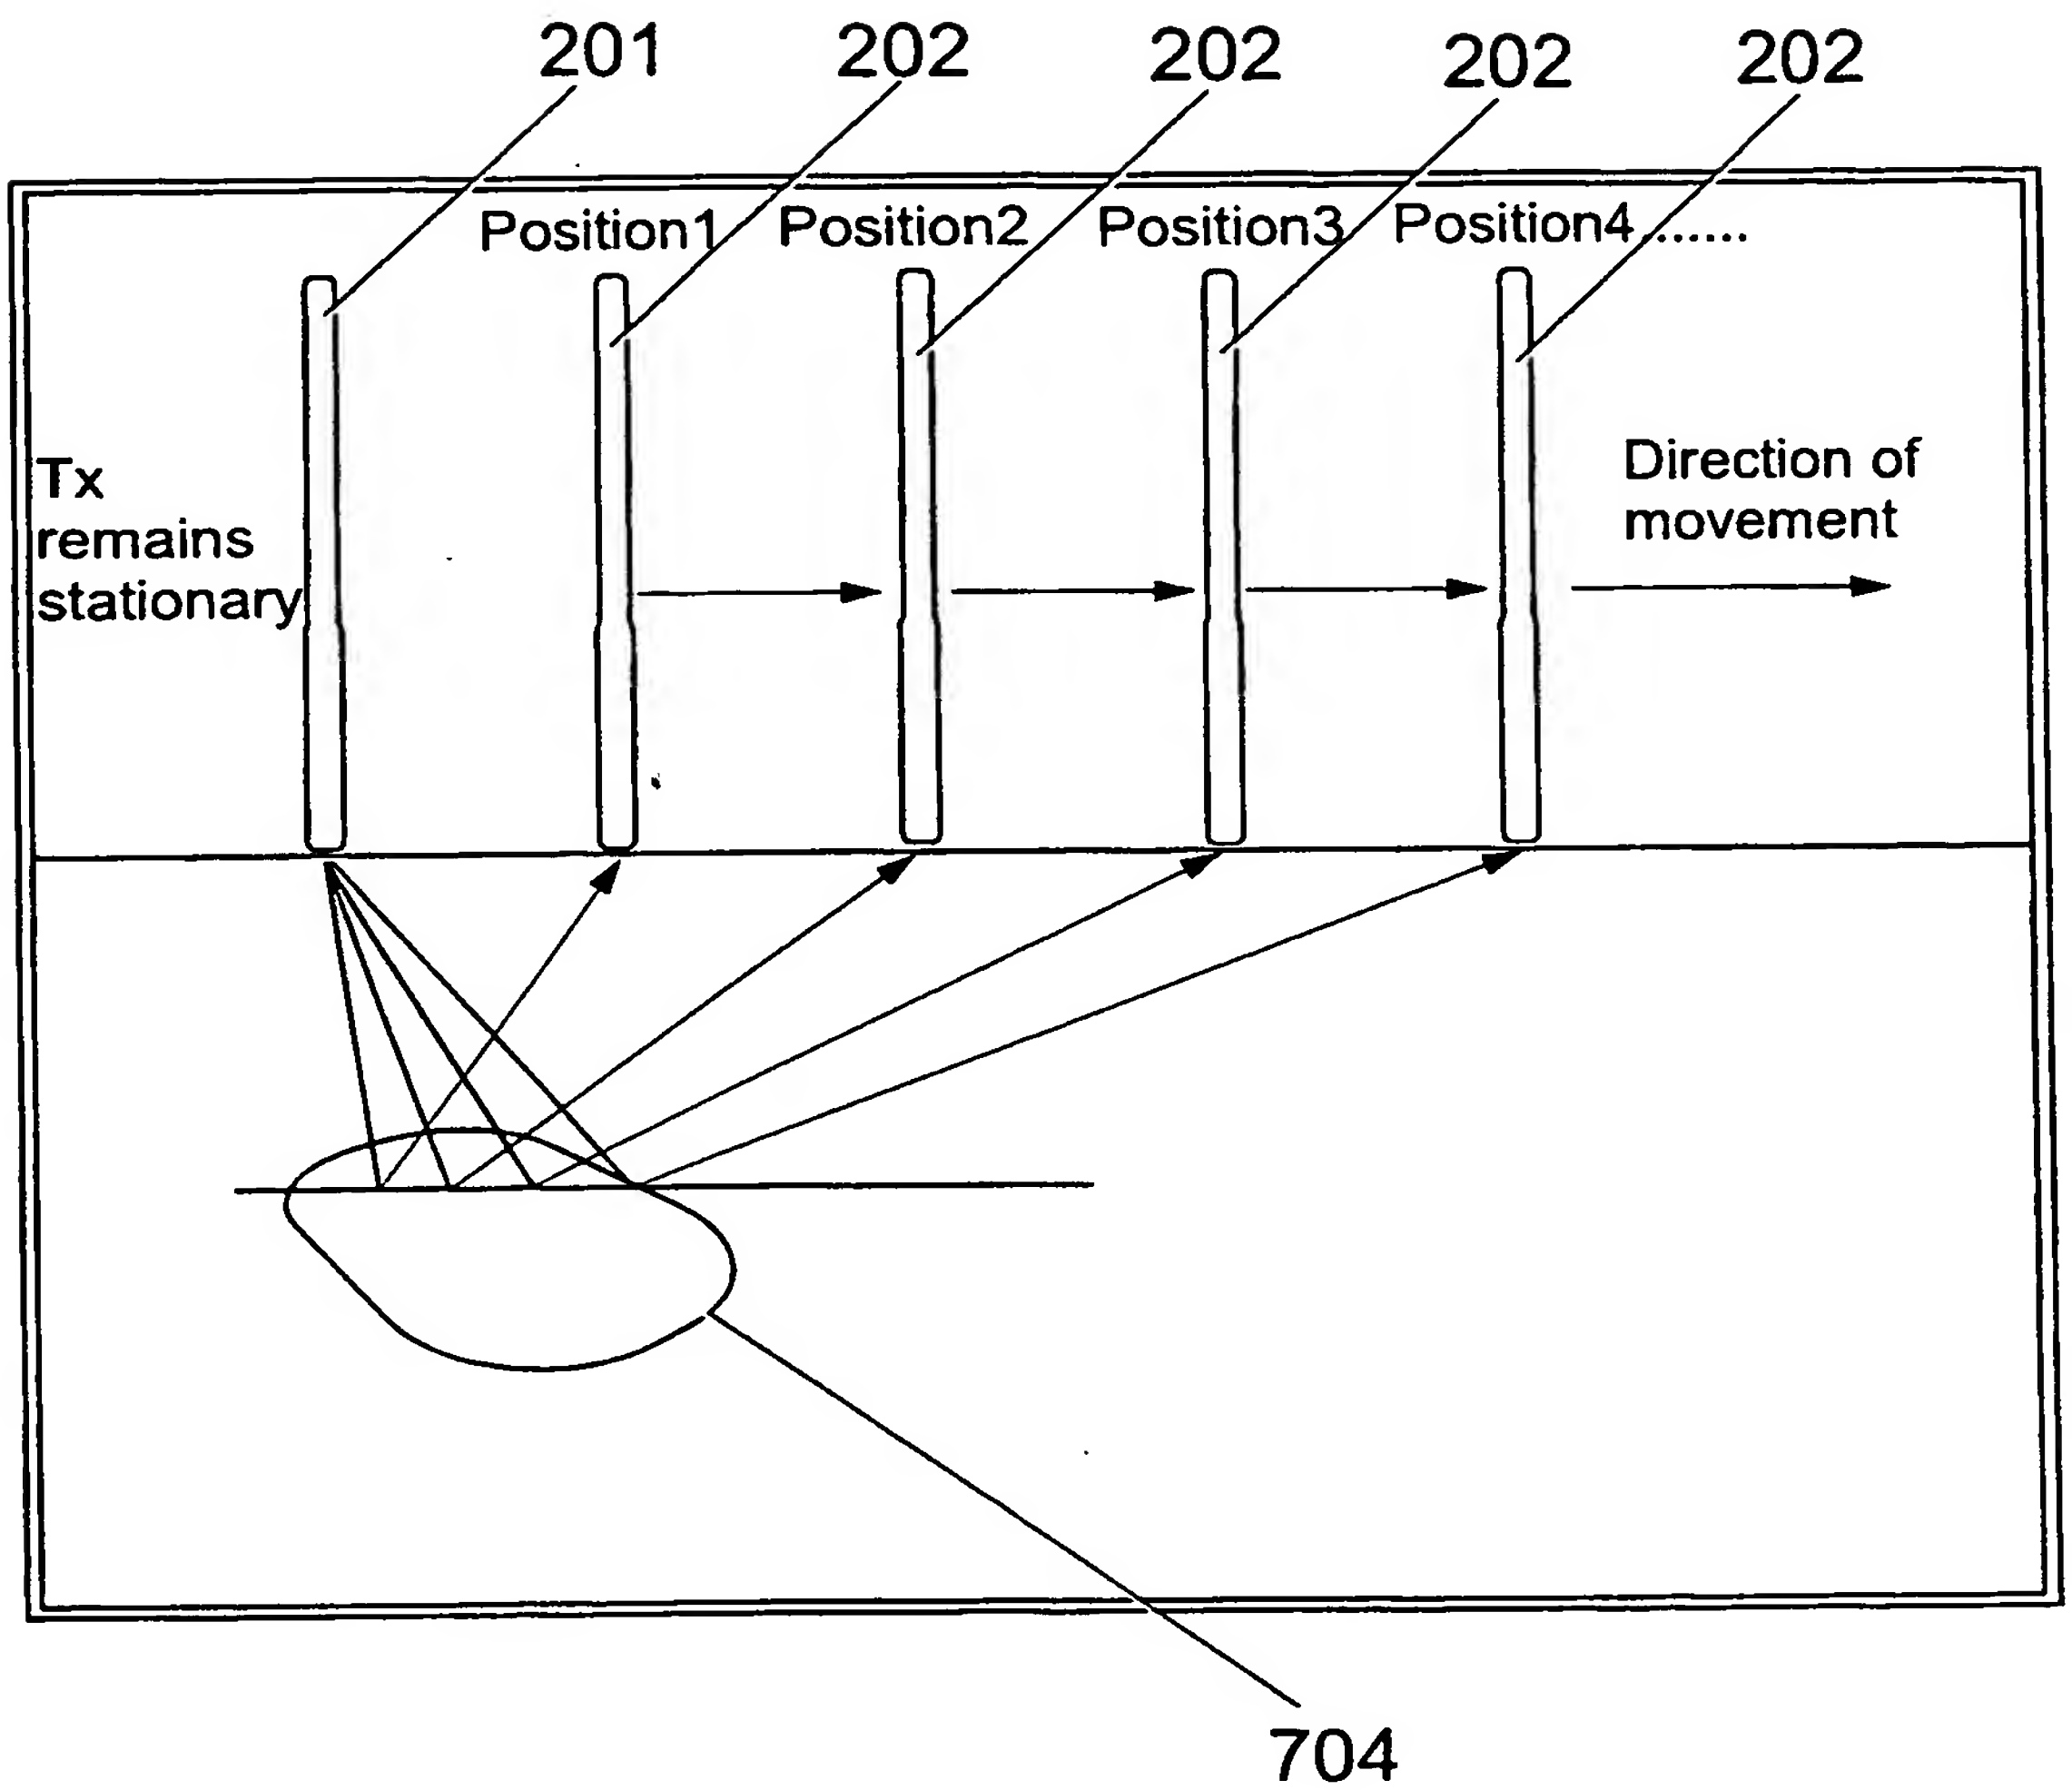
201
202
202
202
202
Position1
Position2
Position3
Position4 ......
Tx
remains
stationary
Direction of
movement
704

Fig. 11B

MODE	Resolution Time (ps)	Resolution Space (m) (in salt water)	PRF (kHz)	Pw (ns)	TR (ns)	Fmax (MHz)	Fmin (MHz)	Ptr	ScanRate (traces/s)	1/SR (Sdelay)	Ts (ns)
A1	50	0.00167	100	0.1	2	10000	1000	40	2500	0.0004	0.05
A2	50	0.00167	100	0.1	5	10000	1000	100	1000	0.001	0.05
A3	100	0.00167	100	0.1	10	5000	500	100	1000	0.001	0.1
A4	250	0.00167	100	0.1	15	2000	200	60	1667	0.0006	0.25
A5	500	0.00167	100	0.1	25	1000	100	50	2000	0.0005	0.5
B1	250	0.01667	100	1	2000	2000	125	8000	12.5	0.08	0.25
B2	500	0.01667	100	1	4000	1000	62.5	8000	12.5	0.08	0.5
B3	625	0.01667	100	1	6000	800	50	9600	10.4	0.096	0.625
B4	1250	0.01667	50	1	8000	400	25	6400	7.8125	0.128	1.25
B5	2500	0.01667	25	1	10000	200	12.5	4000	6.25	0.16	2.5
C1	2500	0.16667	50	10	20000	200	12.5	8000	0.625	1.6	2.5
C2	5000	0.16667	25	10	40000	100	6.25	8000	0.3125	3.2	5
C3	10000	0.16667	12.5	10	80000	50	2.25	8000	0.15625	6.4	10
C4	40000	0.16667	6.25	10	160000	12.5	1	4000	0.15625	6.4	40
C5	62500	0.16667	3.125	10	250000	12.5	1	4000	0.078125	12.8	40

Sampling Rate=Fs=2*Fmax
Range for all generic types=1/4Fmax-4 Fmax
Ptr=Time Range(TR)/Sampling Time (ts)
Sampling Time=Ts=1/2Fmax, time occupied
by 1 pixel in the y-direction going down the trace

Fig. 12

Ptr = number of pixels per trace
PRF = Pulse Repetition Frequency
Pw = Pulse Width
TR = Time Range
Fmax = Maximum Frequency
Fmin = Minimum Frequency
Resolution Time = time between pixels going down the trace
SR = Sampling Rate

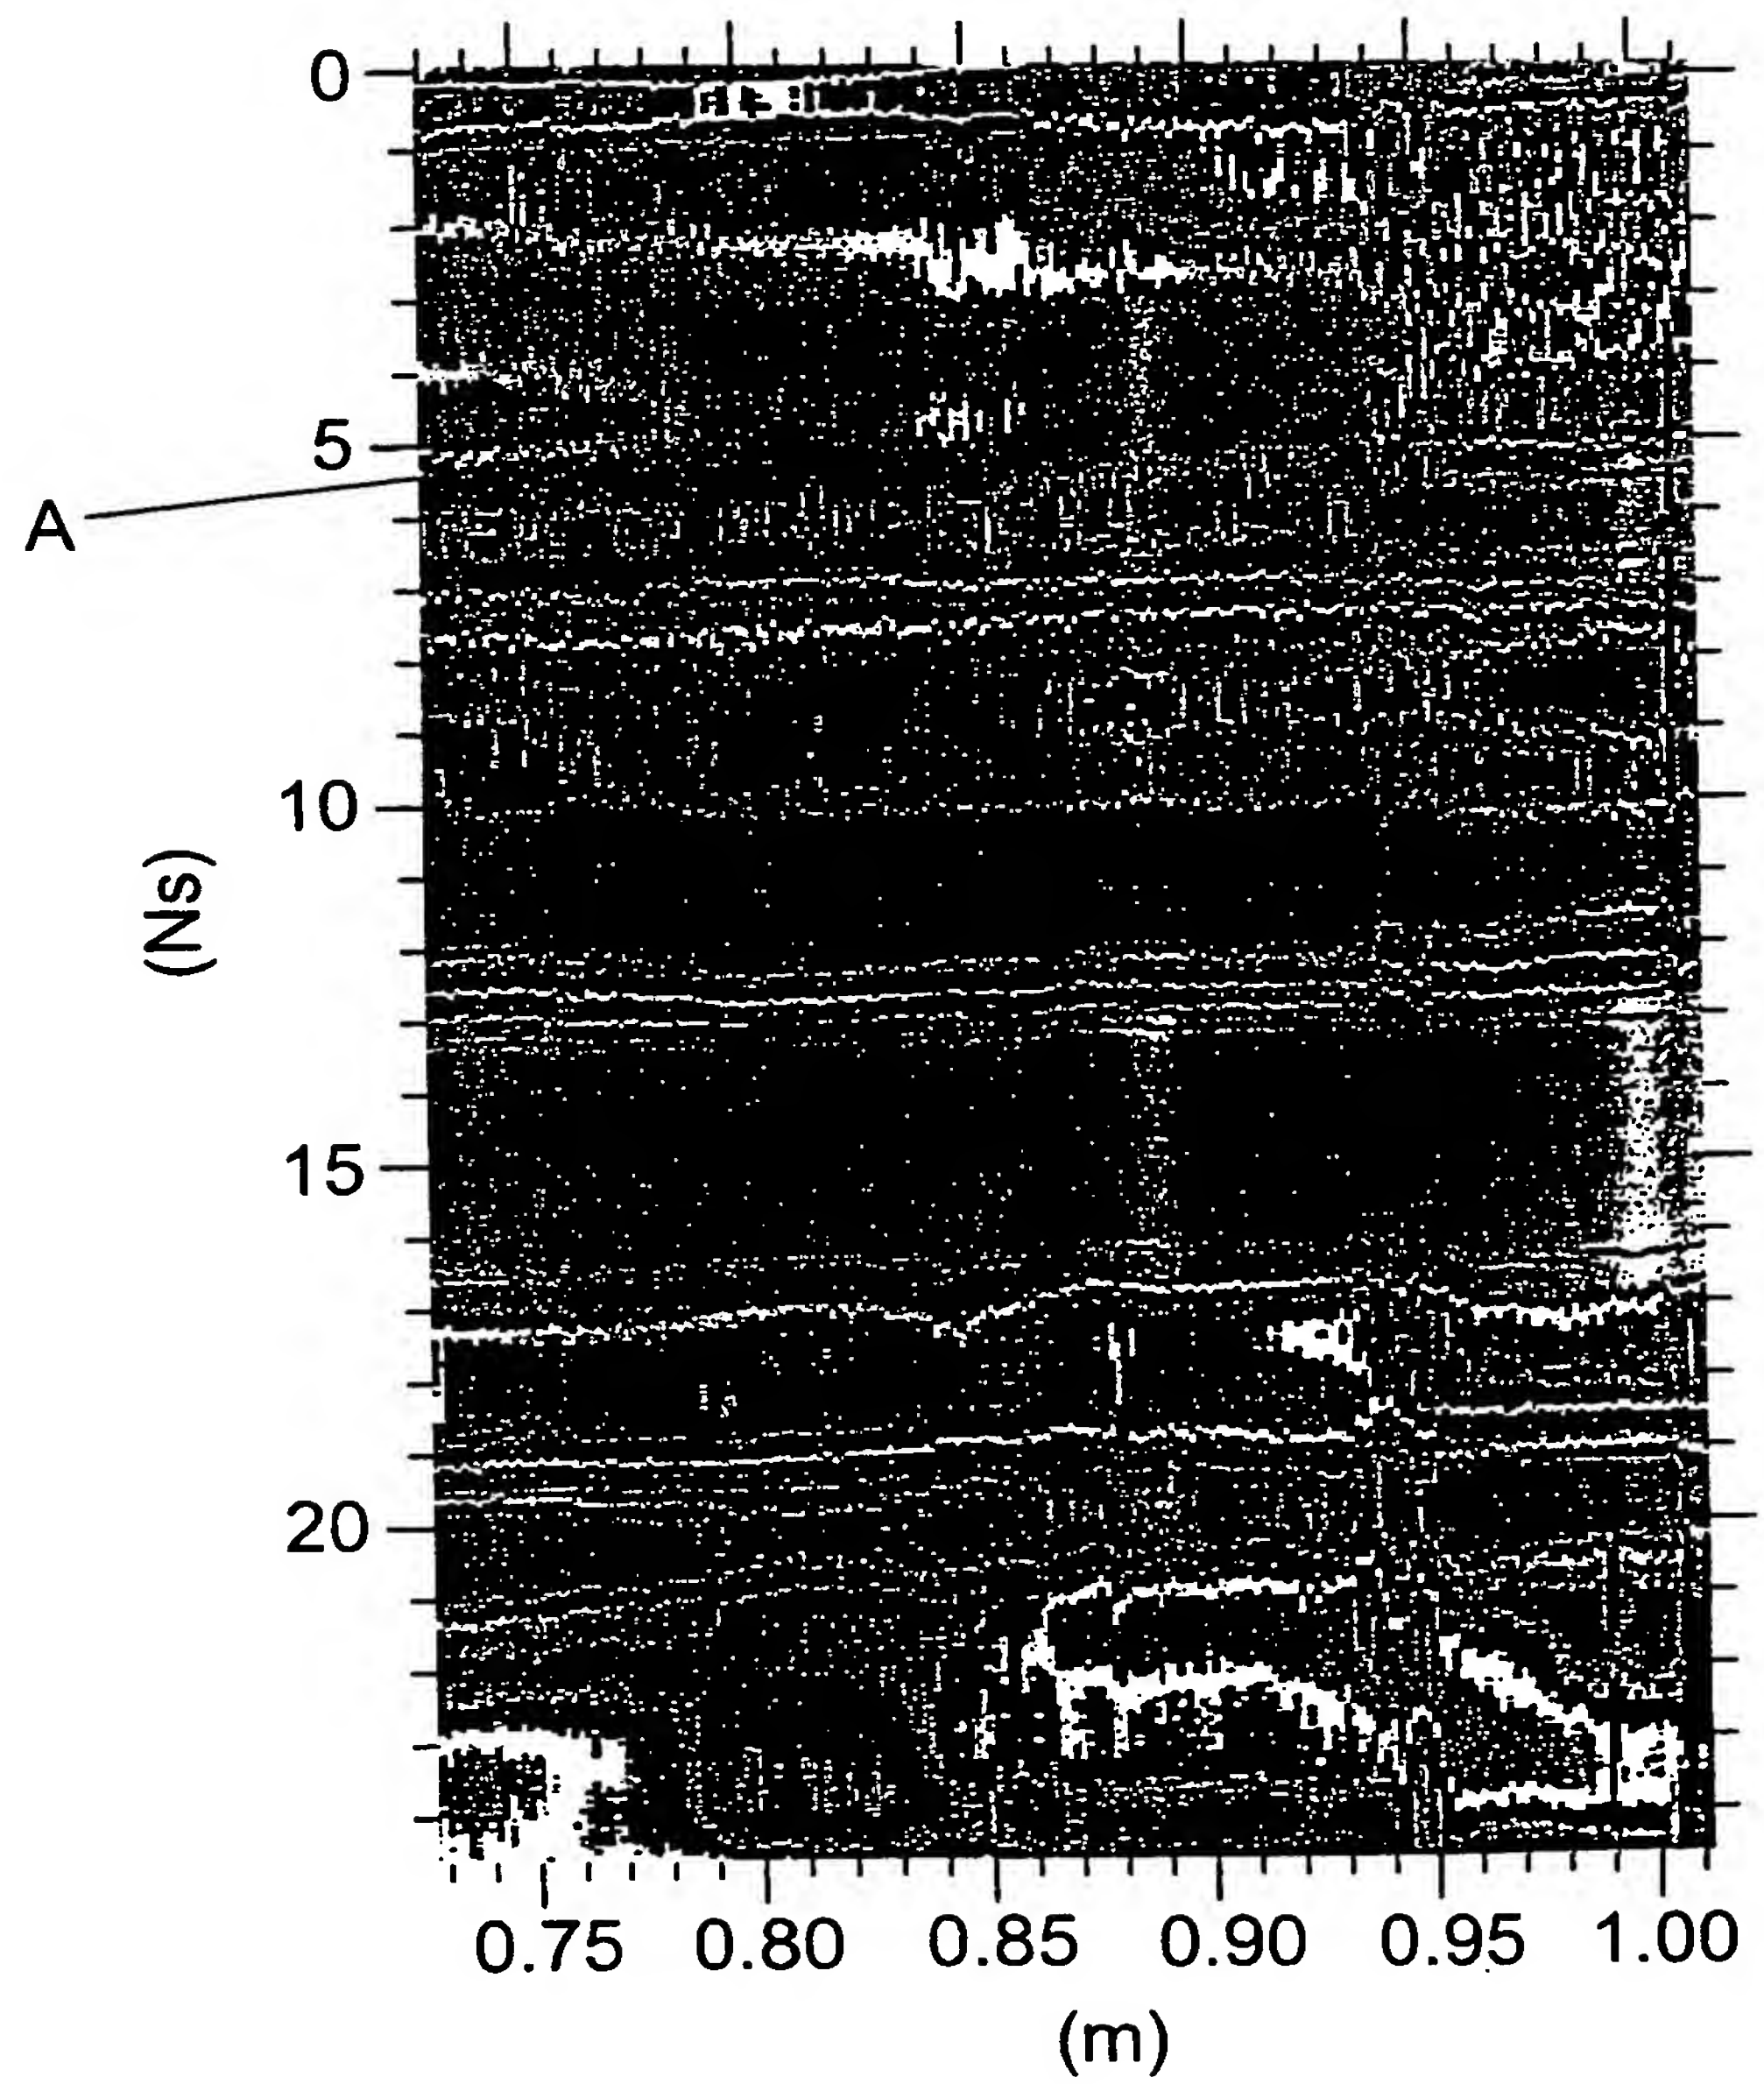

Fig. 13

INTERNATIONAL SEARCH REPORT

International Application No
PCT/GB 00/03431

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 G01N22/00
According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 G01N G01S H01Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, INSPEC, PAJ, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 592 170 A (DAVIS III HERBERT T ET AL) 7 January 1997 (1997-01-07) abstract column 2, line 13 - line 38 claims 1,4,5 ---	55,56,60
X	US 5 829 877 A (BAAAATH LARS B) 3 November 1998 (1998-11-03) abstract ---	55,60
A	US 5 774 091 A (MCEWAN THOMAS E) 30 June 1998 (1998-06-30) abstract figure 2 column 6, line 9 - line 17 column 6, line 35 - line 36 column 6, line 64 - line 67 claim 1 --- -/--	1-54

[X] Further documents are listed in the continuation of box C.

[X] Patent family members are listed in annex.

° Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
19 December 2000	11/01/2001

Name and mailing address of the ISA	Authorized officer
European Patent Office, P.B. 5818 Patentlaan 2 NL – 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016	Ó Donnabháin, C

4

Form PCT/ISA/210 (second sheet) (July 1992)

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication,where appropriate, of the relevant passages	Relevant to claim No.
A	MOSCHURING H ET AL: "The measurement of inhomogeneities and of the permittivity distribution in MIC substrates" CONFERENCE PROCEEDINGS. IEEE INSTRUMENTATION AND MEASUREMENT TECHNOLOGY CONFERENCE (CAT. NO.87CH2405-9), BOSTON, MA, USA, 27-29 APRIL 1987, pages 154-159, XP002155670 1987, New York, NY, USA, IEEE, USA the whole document ---	1
A	VLAHACOS C P ET AL: "QUANTITATIVE TOPOGRAPHIC IMAGING USING A NEAR-FIELD SCANNING MICROWAVE MICROSCOPE" APPLIED PHYSICS LETTERS,US,AMERICAN INSTITUTE OF PHYSICS. NEW YORK, vol. 72, no. 14, 6 April 1998 (1998-04-06), pages 1778-1780, XP000742929 ISSN: 0003-6951 the whole document ---	1
A	GB 2 316 233 A (DASSAULT ELECTRONIQUE) 18 February 1998 (1998-02-18) figure 2D -----	19

4

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB 00/03431

Patent document cited in search report		Publication date	Patent family member(s)			Publication date
US 5592170	A	07-01-1997	NONE			
US 5829877	A	03-11-1998	SE	501473	C	27-02-1995
			AU	688302	B	12-03-1998
			AU	6013094	A	29-08-1994
			CA	2155339	A	18-08-1994
			EP	0698205	A	28-02-1996
			JP	8508338	T	03-09-1996
			SE	9300347	A	04-08-1994
			WO	9418550	A	18-08-1994
			US	6084415	A	04-07-2000
US 5774091	A	30-06-1998	US	5510800	A	23-04-1996
			US	5457394	A	10-10-1995
			US	5345471	A	06-09-1994
			AU	4742296	A	10-07-1996
			CA	2208070	A	27-06-1996
			CN	1173226	A	11-02-1998
			EP	0799428	A	08-10-1997
			JP	10511182	T	27-10-1998
			WO	9619737	A	27-06-1996
			US	5805110	A	08-09-1998
			US	5767953	A	16-06-1998
			US	5519400	A	21-05-1996
			US	5757320	A	26-05-1998
			AU	3499995	A	27-03-1996
			CA	2199120	A	14-03-1996
			EP	0779990	A	25-06-1997
			JP	10505671	T	02-06-1998
			WO	9607928	A	14-03-1996
			US	5576627	A	19-11-1996
			US	5589838	A	31-12-1996
			US	5661490	A	26-08-1997
			AU	6905494	A	12-12-1994
			CA	2162257	A	24-11-1994
			DE	69425373	D	31-08-2000
			EP	0700528	A	13-03-1996
			JP	9500960	T	28-01-1997
			WO	9427168	A	24-11-1994
			US	5512834	A	30-04-1996
			CA	2160351	A	27-10-1994
			EP	0694235	A	31-01-1996
			JP	8509110	T	24-09-1996
			WO	9424788	A	27-10-1994
			US	5523760	A	04-06-1996
			US	5517198	A	14-05-1996
GB 2316233	A	18-02-1998	FR	2751471	A	23-01-1998
			IT	TO910927	A	15-06-1992

12

PATENT COOPERATION TREATY

RECD 06 DEC 2001
WIPO PCT

PCT

INTERNATIONAL PRELIMINARY EXAMINATION REPORT

(PCT Article 36 and Rule 70)

Applicant's or agent's file reference P22111A	**FOR FURTHER ACTION** See Notification of Transmittal of International Preliminary Examination Report (Form PCT/IPEA/416)	
International application No. PCT/GB00/03431	International filing date *(day/month/year)* 07/09/2000	Priority date *(day/month/year)* 07/09/1999
International Patent Classification (IPC) or national classification and IPC G01N22/00		
Applicant STOVE, George, Colin		

1. This international preliminary examination report has been prepared by this International Preliminary Examining Authority and is transmitted to the applicant according to Article 36.

2. This REPORT consists of a total of 7 sheets, including this cover sheet.

   ☐ This report is also accompanied by ANNEXES, i.e. sheets of the description, claims and/or drawings which have been amended and are the basis for this report and/or sheets containing rectifications made before this Authority (see Rule 70.16 and Section 607 of the Administrative Instructions under the PCT).

   These annexes consist of a total of sheets.

3. This report contains indications relating to the following items:

   I ☒ Basis of the report
   II ☐ Priority
   III ☐ Non-establishment of opinion with regard to novelty, inventive step and industrial applicability
   IV ☐ Lack of unity of invention
   V ☒ Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations suporting such statement
   VI ☐ Certain documents cited
   VII ☐ Certain defects in the international application
   VIII ☐ Certain observations on the international application

Date of submission of the demand	Date of completion of this report
27/03/2001	04.12.2001
Name and mailing address of the international preliminary examining authority: European Patent Office D-80298 Munich Tel. +49 89 2399 - 0 Tx: 523656 epmu d Fax: +49 89 2399 - 4465	Authorized officer Huenges, A Telephone No. +49 89 2399 2280

Form PCT/IPEA/409 (cover sheet) (January 1994)

INTERNATIONAL PRELIMINARY EXAMINATION REPORT

International application No. PCT/GB00/03431

I. Basis of the report

1. With regard to the **elements** of the international application *(Replacement sheets which have been furnished to the receiving Office in response to an invitation under Article 14 are referred to in this report as "originally filed" and are not annexed to this report since they do not contain amendments (Rules 70.16 and 70.17))*:

Description, pages:

1-58 as originally filed

Claims, No.:

1-62 as originally filed

Drawings, sheets:

1/21-21/21 as originally filed

2. With regard to the **language**, all the elements marked above were available or furnished to this Authority in the language in which the international application was filed, unless otherwise indicated under this item.

These elements were available or furnished to this Authority in the following language: , which is:

- ☐ the language of a translation furnished for the purposes of the international search (under Rule 23.1(b)).
- ☐ the language of publication of the international application (under Rule 48.3(b)).
- ☐ the language of a translation furnished for the purposes of international preliminary examination (under Rule 55.2 and/or 55.3).

3. With regard to any **nucleotide and/or amino acid sequence** disclosed in the international application, the international preliminary examination was carried out on the basis of the sequence listing:

- ☐ contained in the international application in written form.
- ☐ filed together with the international application in computer readable form.
- ☐ furnished subsequently to this Authority in written form.
- ☐ furnished subsequently to this Authority in computer readable form.
- ☐ The statement that the subsequently furnished written sequence listing does not go beyond the disclosure in the international application as filed has been furnished.
- ☐ The statement that the information recorded in computer readable form is identical to the written sequence listing has been furnished.

4. The amendments have resulted in the cancellation of:

- ☐ the description, pages:
- ☐ the claims, Nos.:

☐ the drawings, sheets:

5. ☐ This report has been established as if (some of) the amendments had not been made, since they have been considered to go beyond the disclosure as filed (Rule 70.2(c)):

   (Any replacement sheet containing such amendments must be referred to under item 1 and annexed to this report.)

6. Additional observations, if necessary:

V. Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement

1. Statement

Novelty (N)	Yes:	Claims	19-22
	No:	Claims	1, 23-24, 53-56, 60, 62
Inventive step (IS)	Yes:	Claims	19-22
	No:	Claims	1-18, 23-62
Industrial applicability (IA)	Yes:	Claims	1-62
	No:	Claims	

2. Citations and explanations
   see separate sheet

<u>**Re Item V**</u>

Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement

1. Reference is made to the following documents:

D1: US-A-5 592 170 (DAVIS III HERBERT T ET AL) 7 January 1997 (1997-01-07)
D2: US-A-5 774 091 (MCEWAN THOMAS E) 30 June 1998 (1998-06-30)
D3: MOSCHURING H ET AL: 'The measurement of inhomogeneities and of the permittivity distribution in MIC substrates' CONFERENCE PROCEEDINGS. IEEE INSTRUMENTATION AND MEASUREMENT TECHNOLOGY CONFERENCE (CAT. NO.87CH2405-9), BOSTON, MA, USA, 27-29 APRIL 1987, pages 154-159, XP002155670 1987, New York, NY, USA, IEEE, USA
D4: GB-A-2 316 233 (DASSAULT ELECTRONIQUE) 18 February 1998 (1998-02-18)

2. **Novelty and inventive step**

2.1. **Independent claim 19**

Independent **claim 19** appears to be new and inventive over the closest prior art (D4), Art. 33(2) and (3) PCT.

Regarding **claim 19**, document **D4** discloses a radar antenna assembly comprising a closed chamber (see fig. 2D), said chamber including four substantially triangular side walls (see fig. 2D) together defining a pyramidal structure, said assembly including transmitter antenna elements disposed on external surfaces of a first opposed pair of said triangular side walls and receiver antenna elements (page 11, second paragraph) disposed on external surfaces of a second opposed pair of said triangular side walls (see fig. 2D).
The subject-matter of claim 19 differs therefrom in that the chamber is not adapted to contain a sample of material (the assembly is made as small as possible, see page 8, third paragraph) and in that the transmitter and receiver antenna elements are disposed on <u>internal</u> surfaces of the triangular side walls.

The problem to be solved by the present invention may therefore be regarded as the improvement of sample irradiation and the elimination of radiation loss (see the description on page 19).
The positioning of antenna elements and of sample material inside the pyramidal structure is not known from any of the further prior art cited in the search report. These documents do not even disclose a radar antenna assembly with a sample positioned inside a measurement chamber.

2.2. **Dependent claims 20-22**

Claims 20-22 are dependent on claim 19 and as such also meet the requirements of the PCT with respect to novelty and inventive step.

3. **Lack of novelty and inventive step**

3.1. **Independent claims 1, 23, 55 and 60**

The subject-matter of **claims 1, 23, 55 and 60** is not novel (Article 33(2) PCT).

Regarding **claim 1**, document D3 discloses a radar antenna assembly for use as a transmitter, receiver or transceiver (see the abstract of D3) comprising:
- a tubular casing (see the coaxial line in fig. 1, D3) having a radar-reflective inner surface (implicitly disclosed with the TEM-wave propagating in the coaxial line, see page 155, right column, D3) and having a first end, a second end and a longitudinal axis (see fig. 1, D3);
- a radar reflective reflector closing said first end (see fig. 1 and the implicit disclosure of a reflecting end with a propagating TEM-wave, D3);
- an aperture disposed at said second end (see fig. 1, D3);
- an elongate antenna element (concentric line in fig. 1, D3); and
- dielectric material filling the volume of the tubular casing (the coaxial line is filled with air).

Hence, document D3 shows a device comprising all features of claim 1.

Regarding **claim 23**, document D3 shows a radar system (see the abstract of D3) comprising pulsed signal generating means (implicitly disclosed with thickness

measurements, see page 157, last paragraph, D3), transmitter antenna means (see fig. 1, D3), receiver antenna means (see fig. 1, D3) control means for controlling the pulse generator (implicitly disclosed with thickness measurements, page 157, last paragraph and fig. 8, D3), analog-digital converter means (see fig. 8, D3), and data storage means (desk computer in fig. 8, D3), wherein the transmitter and receiver antenna means comprise a radar antenna assembly as claimed in claim 1 (see the argumentation with respect to claim 1 above).

Regarding **claim 55**, document **D1** exposes a method of typecasting a subject (col. 1, second paragraph, D1), comprising the steps of:
- irradiating the subject with a pulsed, broad band radar frequency signal (col. 2, second paragraph, D1) transmitted by a transmitter antenna (14, fig. 1, D1);
- detecting a return signal following interaction of said transmitted signal with said subject (col. 4, third paragraph, D1) using a receiver antenna (24a, 24b, fig. 1, D1);
- calculating an energy-frequency spectrum of said return signal (col. 13, first paragraph, D1); and
- analysing said energy-frequency spectrum to obtain a characteristic energy-frequency signature of said subject (claim 5 of D1).

Regarding **claim 60**, document **D1** shows a method of identifying an unknown subject (col. 1, second paragraph, D1) comprising the steps of:
- obtaining an energy-frequency signature of said subject using the method of claim 55 (see the argumentation with respect to claim 55); and
- comparing said energy-frequency signature of the unknown subject to a database of energy-frequency signatures of known subjects previously obtained using the method of claim 55 (claim 5 of D1).

3.2. **Dependent claims 2-18, 24-54, 56-59 and 61-62**

Dependent **claims 2-18, 24-54, 56-59 and 61-62** do not contain any features which, in combination with the features of any claim to which they refer, meet the requirements of the PCT in respect of novelty or inventive step, the reasons being either the disclosure of the additional feature(s) in the novelty destroying document of the respective independent claim or the obviousness of the feature

with respect to the further prior art:

With respect to **claims 2-7**, see D2, col. 6, last paragraph.
With respect to **claims 8-15**, see D3, page 154 and fig. 1.
The additional features of **claims 16-18** are obvious alternatives to the air-filled assembly disclosed in D3, see page 157, left column.
With respect to **claim 24**, see D3, fig. 1.
The additional features of **claims 25-52** relate to constructional changes in the device of claim 23 which come within the scope of the customary practice followed by persons skilled in the art.
With respect to **claims 53 and 54**, see D3, fig. 8.
With respect to **claim 56**, see D1, col. 13, penultimate paragraph - col. 14, penultimate paragraph.
The subject-matter of **claims 57-59** relates to normal statistical analysis known to the person skilled in the art.
With respect to **claim 61**, see D3, figs. 1 and 8 and
With respect to **claim 62**, see D1, claim 5.

4. **Industrial applicability**

The industrial applicability of **claims 1-62** is beyond doubt, Art. 33(4) PCT.

5. It is to be noted that the subject-matter of **claim 19** clearly does not comprise the same general inventive concept as **claims 1, 23, 55 and 60** (Rule 13.1 PCT) because claim 19 defines a device having a certain geometry for improved illumination of an object which is not present or referred to in independent claims 1, 23, 55 and 60.

PATENT COOPERATION TREATY

From the
INTERNATIONAL PRELIMINARY EXAMINING AUTHORITY

To:

Murgitroyd & Company
373 Scotland Street
Glasgow G5 8QA
GRANDE BRETAGNE

PCT

NOTIFICATION OF TRANSMITTAL OF THE INTERNATIONAL PRELIMINARY EXAMINATION REPORT

(PCT Rule 71.1)

Date of mailing *(day/month/year)* 04.12.2001	
Applicant's or agent's file reference P22111A	**IMPORTANT NOTIFICATION**

International application No.	International filing date *(day/month/year)*	Priority date *(day/month/year)*
PCT/GB00/03431	07/09/2000	07/09/1999

Applicant
STOVE, George, Colin

1. The applicant is hereby notified that this International Preliminary Examining Authority transmits herewith the international preliminary examination report and its annexes, if any, established on the international application.

2. A copy of the report and its annexes, if any, is being transmitted to the International Bureau for communication to all the elected Offices.

3. Where required by any of the elected Offices, the International Bureau will prepare an English translation of the report (but not of any annexes) and will transmit such translation to those Offices.

4. **REMINDER**

The applicant must enter the national phase before each elected Office by performing certain acts (filing translations and paying national fees) within 30 months from the priority date (or later in some Offices) (Article 39(1)) (see also the reminder sent by the International Bureau with Form PCT/IB/301).

Where a translation of the international application must be furnished to an elected Office, that translation must contain a translation of any annexes to the international preliminary examination report. It is the applicant's responsibility to prepare and furnish such translation directly to each elected Office concerned.

For further details on the applicable time limits and requirements of the elected Offices, see Volume II of the PCT Applicant's Guide.

Name and mailing address of the IPEA/	Authorized officer
European Patent Office D-80298 Munich Tel. +49 89 2399 - 0 Tx: 523656 epmu d Fax: +49 89 2399 - 4465	Weber, R Tel.+49 89 2399-2382

Form PCT/IPEA/416 (July 1992)

PATENT COOPERATION TREATY

PCT

INTERNATIONAL PRELIMINARY EXAMINATION REPORT

(PCT Article 36 and Rule 70)

Applicant's or agent's file reference P22111A	**FOR FURTHER ACTION**	See Notification of Transmittal of International Preliminary Examination Report (Form PCT/IPEA/416)
International application No. PCT/GB00/03431	International filing date *(day/month/year)* 07/09/2000	Priority date *(day/month/year)* 07/09/1999
International Patent Classification (IPC) or national classification and IPC G01N22/00		
Applicant STOVE, George, Colin		

1. This international preliminary examination report has been prepared by this International Preliminary Examining Authority and is transmitted to the applicant according to Article 36.

2. This REPORT consists of a total of 7 sheets, including this cover sheet.

   ☐ This report is also accompanied by ANNEXES, i.e. sheets of the description, claims and/or drawings which have been amended and are the basis for this report and/or sheets containing rectifications made before this Authority (see Rule 70.16 and Section 607 of the Administrative Instructions under the PCT).

   These annexes consist of a total of sheets.

3. This report contains indications relating to the following items:

   I ☒ Basis of the report
   II ☐ Priority
   III ☐ Non-establishment of opinion with regard to novelty, inventive step and industrial applicability
   IV ☐ Lack of unity of invention
   V ☒ Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations suporting such statement
   VI ☐ Certain documents cited
   VII ☐ Certain defects in the international application
   VIII ☐ Certain observations on the international application

Date of submission of the demand	Date of completion of this report
27/03/2001	04.12.2001
Name and mailing address of the international preliminary examining authority: European Patent Office D-80298 Munich Tel. +49 89 2399 - 0 Tx: 523656 epmu d Fax: +49 89 2399 - 4465	Authorized officer Huenges, A Telephone No. +49 89 2399 2280

INTERNATIONAL PRELIMINARY EXAMINATION REPORT

International application No. PCT/GB00/03431

I. Basis of the report

1. With regard to the **elements** of the international application *(Replacement sheets which have been furnished to the receiving Office in response to an invitation under Article 14 are referred to in this report as "originally filed" and are not annexed to this report since they do not contain amendments (Rules 70.16 and 70.17))*:

Description, pages:

1-58 as originally filed

Claims, No.:

1-62 as originally filed

Drawings, sheets:

1/21-21/21 as originally filed

2. With regard to the **language**, all the elements marked above were available or furnished to this Authority in the language in which the international application was filed, unless otherwise indicated under this item.

These elements were available or furnished to this Authority in the following language: , which is:

- ☐ the language of a translation furnished for the purposes of the international search (under Rule 23.1(b)).
- ☐ the language of publication of the international application (under Rule 48.3(b)).
- ☐ the language of a translation furnished for the purposes of international preliminary examination (under Rule 55.2 and/or 55.3).

3. With regard to any **nucleotide and/or amino acid sequence** disclosed in the international application, the international preliminary examination was carried out on the basis of the sequence listing:

- ☐ contained in the international application in written form.
- ☐ filed together with the international application in computer readable form.
- ☐ furnished subsequently to this Authority in written form.
- ☐ furnished subsequently to this Authority in computer readable form.
- ☐ The statement that the subsequently furnished written sequence listing does not go beyond the disclosure in the international application as filed has been furnished.
- ☐ The statement that the information recorded in computer readable form is identical to the written sequence listing has been furnished.

4. The amendments have resulted in the cancellation of:

- ☐ the description, pages:
- ☐ the claims, Nos.:

INTERNATIONAL PRELIMINARY EXAMINATION REPORT

International application No. PCT/GB00/03431

☐ the drawings, sheets:

5. ☐ This report has been established as if (some of) the amendments had not been made, since they have been considered to go beyond the disclosure as filed (Rule 70.2(c)):

   (Any replacement sheet containing such amendments must be referred to under item 1 and annexed to this report.)

6. Additional observations, if necessary:

V. Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement

1. Statement

Novelty (N)	Yes:	Claims	19-22
	No:	Claims	1, 23-24, 53-56, 60, 62
Inventive step (IS)	Yes:	Claims	19-22
	No:	Claims	1-18, 23-62
Industrial applicability (IA)	Yes:	Claims	1-62
	No:	Claims	

2. Citations and explanations
   see separate sheet

Re Item V

Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement

1. Reference is made to the following documents:

   D1: US-A-5 592 170 (DAVIS III HERBERT T ET AL) 7 January 1997 (1997-01-07)

   D2: US-A-5 774 091 (MCEWAN THOMAS E) 30 June 1998 (1998-06-30)

   D3: MOSCHURING H ET AL: 'The measurement of inhomogeneities and of the permittivity distribution in MIC substrates' CONFERENCE PROCEEDINGS. IEEE INSTRUMENTATION AND MEASUREMENT TECHNOLOGY CONFERENCE (CAT. NO.87CH2405-9), BOSTON, MA, USA, 27-29 APRIL 1987, pages 154-159, XP002155670 1987, New York, NY, USA, IEEE, USA

   D4: GB-A-2 316 233 (DASSAULT ELECTRONIQUE) 18 February 1998 (1998-02-18)

2. **Novelty and inventive step**

2.1. **Independent claim 19**

Independent **claim 19** appears to be new and inventive over the closest prior art (D4), Art. 33(2) and (3) PCT.

Regarding **claim 19**, document **D4** discloses a radar antenna assembly comprising a closed chamber (see fig. 2D), said chamber including four substantially triangular side walls (see fig. 2D) together defining a pyramidal structure, said assembly including transmitter antenna elements disposed on external surfaces of a first opposed pair of said triangular side walls and receiver antenna elements (page 11, second paragraph) disposed on external surfaces of a second opposed pair of said triangular side walls (see fig. 2D).
The subject-matter of claim 19 differs therefrom in that the chamber is not adapted to contain a sample of material (the assembly is made as small as possible, see page 8, third paragraph) and in that the transmitter and receiver antenna elements are disposed on <u>internal</u> surfaces of the triangular side walls.

The problem to be solved by the present invention may therefore be regarded as the improvement of sample irradiation and the elimination of radiation loss (see the description on page 19).
The positioning of antenna elements and of sample material inside the pyramidal structure is not known from any of the further prior art cited in the search report. These documents do not even disclose a radar antenna assembly with a sample positioned inside a measurement chamber.

2.2. **Dependent claims 20-22**

Claims 20-22 are dependent on claim 19 and as such also meet the requirements of the PCT with respect to novelty and inventive step.

3. **Lack of novelty and inventive step**

3.1. **Independent claims 1, 23, 55 and 60**

The subject-matter of **claims 1, 23, 55 and 60** is not novel (Article 33(2) PCT).

Regarding **claim 1**, document D3 discloses a radar antenna assembly for use as a transmitter, receiver or transceiver (see the abstract of D3) comprising:
- a tubular casing (see the coaxial line in fig. 1, D3) having a radar-reflective inner surface (implicitly disclosed with the TEM-wave propagating in the coaxial line, see page 155, right column, D3) and having a first end, a second end and a longitudinal axis (see fig. 1, D3);
- a radar reflective reflector closing said first end (see fig. 1 and the implicit disclosure of a reflecting end with a propagating TEM-wave, D3);
- an aperture disposed at said second end (see fig. 1, D3);
- an elongate antenna element (concentric line in fig. 1, D3); and
- dielectric material filling the volume of the tubular casing (the coaxial line is filled with air).
Hence, document D3 shows a device comprising all features of claim 1.

Regarding **claim 23**, document D3 shows a radar system (see the abstract of D3) comprising pulsed signal generating means (implicitly disclosed with thickness

measurements, see page 157, last paragraph, D3), transmitter antenna means (see fig. 1, D3), receiver antenna means (see fig. 1, D3) control means for controlling the pulse generator (implicitly disclosed with thickness measurements, page 157, last paragraph and fig. 8, D3), analog-digital converter means (see fig. 8, D3), and data storage means (desk computer in fig. 8, D3), wherein the transmitter and receiver antenna means comprise a radar antenna assembly as claimed in claim 1 (see the argumentation with respect to claim 1 above).

Regarding **claim 55**, document **D1** exposes a method of typecasting a subject (col. 1, second paragraph, D1), comprising the steps of:
- irradiating the subject with a pulsed, broad band radar frequency signal (col. 2, second paragraph, D1) transmitted by a transmitter antenna (14, fig. 1, D1);
- detecting a return signal following interaction of said transmitted signal with said subject (col. 4, third paragraph, D1) using a receiver antenna (24a, 24b, fig. 1, D1);
- calculating an energy-frequency spectrum of said return signal (col. 13, first paragraph, D1); and
- analysing said energy-frequency spectrum to obtain a characteristic energy-frequency signature of said subject (claim 5 of D1).

Regarding **claim 60**, document **D1** shows a method of identifying an unknown subject (col. 1, second paragraph, D1) comprising the steps of:
- obtaining an energy-frequency signature of said subject using the method of claim 55 (see the argumentation with respect to claim 55); and
- comparing said energy-frequency signature of the unknown subject to a database of energy-frequency signatures of known subjects previously obtained using the method of claim 55 (claim 5 of D1).

3.2. **Dependent claims 2-18, 24-54, 56-59 and 61-62**

Dependent **claims 2-18, 24-54, 56-59 and 61-62** do not contain any features which, in combination with the features of any claim to which they refer, meet the requirements of the PCT in respect of novelty or inventive step, the reasons being either the disclosure of the additional feature(s) in the novelty destroying document of the respective independent claim or the obviousness of the feature

with respect to the further prior art:

With respect to **claims 2-7**, see D2, col. 6, last paragraph.
With respect to **claims 8-15**, see D3, page 154 and fig. 1.
The additional features of **claims 16-18** are obvious alternatives to the air-filled assembly disclosed in D3, see page 157, left column.
With respect to **claim 24**, see D3, fig. 1.
The additional features of **claims 25-52** relate to constructional changes in the device of claim 23 which come within the scope of the customary practice followed by persons skilled in the art.
With respect to **claims 53 and 54**, see D3, fig. 8.
With respect to **claim 56**, see D1, col. 13, penultimate paragraph - col. 14, penultimate paragraph.
The subject-matter of **claims 57-59** relates to normal statistical analysis known to the person skilled in the art.
With respect to **claim 61**, see D3, figs. 1 and 8 and
With respect to **claim 62**, see D1, claim 5.

4. **Industrial applicability**

The industrial applicability of **claims 1-62** is beyond doubt, Art. 33(4) PCT.

5. It is to be noted that the subject-matter of **claim 19** clearly does not comprise the same general inventive concept as **claims 1, 23, 55 and 60** (Rule 13.1 PCT) because claim 19 defines a device having a certain geometry for improved illumination of an object which is not present or referred to in independent claims 1, 23, 55 and 60.

P[illegible]ENT COOPERATION TREATY

From the INTERNATIONAL SEARCHING AUTHORITY

To:

Murgitroyd & Company
373 Scotland Street
Glasgow G5 8QA
UNITED KINGDOM

MURGITROYD & COMPANY
10 JAN 2001
COMP

PCT

NOTIFICATION OF TRANSMITTAL OF THE INTERNATIONAL SEARCH REPORT OR THE DECLARATION

(PCT Rule 44.1)

	Date of mailing (*day/month/year*) 11/01/2001
Applicant's or agent's file reference P22111A	**FOR FURTHER ACTION** See paragraphs 1 and 4 below
International application No. PCT/GB 00/03431	International filing date (*day/month/year*) 07/09/2000
Applicant STOVE, George, Colin	

1. [X] The applicant is hereby notified that the International Search Report has been established and is transmitted herewith.

Filing of amendments and statement under Article 19:
The applicant is entitled, if he so wishes, to amend the claims of the International Application (see Rule 46):

When? The time limit for filing such amendments is normally 2 months from the date of transmittal of the International Search Report; however, for more details, see the notes on the accompanying sheet.

Where? Directly to the International Bureau of WIPO
34, chemin des Colombettes
1211 Geneva 20, Switzerland
Fascimile No.: (41-22) 740.14.35

For more detailed instructions, see the notes on the accompanying sheet.

2. [ ] The applicant is hereby notified that no International Search Report will be established and that the declaration under Article 17(2)(a) to that effect is transmitted herewith.

3. [ ] **With regard to the protest** against payment of (an) additional fee(s) under Rule 40.2, the applicant is notified that:

[ ] the protest together with the decision thereon has been transmitted to the International Bureau together with the applicant's request to forward the texts of both the protest and the decision thereon to the designated Offices.

[ ] no decision has been made yet on the protest; the applicant will be notified as soon as a decision is made.

4. **Further action(s):** The applicant is reminded of the following:

Shortly after **18 months** from the priority date, the international application will be published by the International Bureau. If the applicant wishes to avoid or postpone publication, a notice of withdrawal of the international application, or of the priority claim, must reach the International Bureau as provided in Rules 90*bis*.1 and 90*bis*.3, respectively, before the completion of the technical preparations for international publication.

Within **19 months** from the priority date, a demand for international preliminary examination must be filed if the applicant wishes to postpone the entry into the national phase until 30 months from the priority date (in some Offices even later).

Within **20 months** from the priority date, the applicant must perform the prescribed acts for entry into the national phase before all designated Offices which have not been elected in the demand or in a later election within 19 months from the priority date or could not be elected because they are not bound by Chapter II.

Name and mailing address of the International Searching Authority	Authorized officer
European Patent Office, P.B. 5818 Patentlaan 2 NL-2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016	Mareike Zambuto

Form PCT/ISA/220 (July 1998)

NOTES TO FORM PCT/ISA/220

These Notes are intended to give the basic instructions concerning the filing of amendments under article 19. The Notes are based on the requirements of the Patent Cooperation Treaty, the Regulations and the Administrative Instructions under that Treaty. In case of discrepancy between these Notes and those requirements, the latter are applicable. For more detailed information, see also the PCT Applicant's Guide, a publication of WIPO.

In these Notes, "Article", "Rule", and "Section" refer to the provisions of the PCT, the PCT Regulations and the PCT Administrative Instructions respectively.

INSTRUCTIONS CONCERNING AMENDMENTS UNDER ARTICLE 19

The applicant has, after having received the international search report, one opportunity to amend the claims of the international application. It should however be emphasized that, since all parts of the international application (claims, description and drawings) may be amended during the international preliminary examination procedure, there is usually no need to file amendments of the claims under Article 19 except where, e.g. the applicant wants the latter to be published for the purposes of provisional protection or has another reason for amending the claims before international pbulication. Furthermore, it should be emphasized that provisional protection is available in some States only.

What parts of the international application may be amended?

Under Article 19, only the claims may be amended.

During the international phase, the claims may also be amended (or further amended) under Article 34 before the International Preliminary Examining Authority. The description and drawings may only be amended under Article 34 before the International Examining Authority.

Upon entry into the national phase, all parts of the international application may be amended under Article 28 or, where applicable, Article 41.

When? Within 2 months from the date of transmittal of the international search report or 16 months from the priority date, whichever time limit expires later. It should be noted, however, that the amendments will be considered as having been received on time if they are received by the International Bureau after the expiration of the applicable time limit but before the completion of the technical preparations for international publication (Rule 46.1).

Where not to file the amendments?

The amendments may only be filed with the International Bureau and not with the receiving Office or the International Searching Authority (Rule 46.2).

Where a demand for international preliminary examination has been/is filed, see below.

How? Either by cancelling one or more entire claims, by adding one or more new claims or by amending the text of one or more of the claims as filed.

A replacement sheet must be submitted for each sheet of the claims which, on account of an amendment or amendments, differs from the sheet originally filed.

All the claims appearing on a replacement sheet must be numbered in Arabic numerals. Where a claim is cancelled, no renumbering of the other claims is required. In all cases where claims are renumbered, they must be renumbered consecutively (Administrative Instructions, Section 205(b)).

The amendments must be made in the language in which the international application is to be published.

What documents must/may accompany the amendments?

Letter (Section 205(b)):

The amendments must be submitted with a letter.

The letter will not be published with the international application and the amended claims. It should not be confused with the "Statement under Article 19(1)" (see below, under "Statement under Article 19(1)").

The letter must be in English or French, at the choice of the applicant. However, if the language of the international application is English, the letter must be in English; if the language of the international application is French, the letter must be in French.

NOTES TO FORM PCT/ISA/220 (continued)

The letter must indicate the differences between the claims as filed and the claims as amended. It must, in particular, indicate, in connection with each claim appearing in the international application (it being understood that identical indications concerning several claims may be grouped),whether

(i) the claim is unchanged;

(ii) the claim is cancelled;

(iii) the claim is new;

(iv) the claim replaces one or more claims as filed;

(v) the claim is the result of the division of a claim as filed.

The following examples illustrate the manner in which amendments mustbe explained in the accompanying letter:

1. [Where originally there were 48 claims and after amendment of some claims there are 51]: "Claims 1 to 29, 31, 32, 34, 35, 37 to 48 replaced by amended claims bearing the same numbers; claims 30, 33 and 36 unchanged; new claims 49 to 51 added."
2. [Where originally there were 15 claims and after amendment of all claims there are 11]: "Claims 1 to 15 replaced by amended claims 1 to 11."
3. [Where originally there were 14 claims and the amendments consist in cancelling some claims and in adding new claims]: "Claims 1 to 6 and 14 unchanged; claims 7 to 13 cancelled; new claims 15, 16 and 17 added." or "Claims 7 to 13 cancelled; new claims 15, 16 and 17 added; all other claims unchanged."
4. [Where various kinds of amendments are made]: "Claims 1-10 unchanged; claims 11 to 13, 18 and 19 cancelled; claims 14, 15 and 16 replaced by amended claim 14; claim 17 subdivided into amended claims 15, 16 and 17; new claims 20 and 21 added."

"Statement under article 19(1)" (Rule 46.4)

The amendments may be accompanied by a statement explaining the amendments and indicating any impact that such amendments might have on the description and the drawings (which cannot be amended under Article 19(1)).

The statement will be published with the international application and the amended claims.

It must be in the language in which the international appplication is to be published.

It must be brief, not exceeding 500 words if in English or if translated into English.

It should not be confused with and does not replace the letter indicating the differences between the claims as filed and as amended. It must be filed on a separate sheet and must be identified as such by a heading, preferably by using the words "Statement under Article 19(1)."

It may not contain any disparaging comments on the international search report or the relevance of citations contained in that report. Reference to citations, relevant to a given claim, contained in the international search report may be made only in connection with an amendment of that claim.

Consequence if a demand for international preliminary examination has already been filed

If, at the time of filing any amendments under Article 19, a demand for international preliminary examination has already been submitted, the applicant must preferably, at the same time of filing the amendments with the International Bureau, also file a copy of such amendments with the International Preliminary Examining Authority (see Rule 62.2(a), first sentence).

Consequence with regard to translation of the international application for entry into the national phase

The applicant's attention is drawn to the fact that, where upon entry into the national phase, a translation of the claims as amended under Article 19 may have to be furnished to the designated/elected Offices, instead of, or in addition to, the translation of the claims as filed.

For further details on the requirements of each designated/elected Office, see Volume II of the PCT Applicant's Guide.

PATENT COOPERATION TREATY

PCT

INTERNATIONAL SEARCH REPORT

(PCT Article 18 and Rules 43 and 44)

Applicant's or agent's file reference P22111A	**FOR FURTHER ACTION** see Notification of Transmittal of International Search Report (Form PCT/ISA/220) as well as, where applicable, item 5 below.	
International application No. PCT/GB 00/03431	International filing date *(day/month/year)* 07/09/2000	(Earliest) Priority Date *(day/month/year)* 07/09/1999
Applicant STOVE, George, Colin		

This International Search Report has been prepared by this International Searching Authority and is transmitted to the applicant according to Article 18. A copy is being transmitted to the International Bureau.

This International Search Report consists of a total of 3 sheets.

[X] It is also accompanied by a copy of each prior art document cited in this report.

1. **Basis of the report**

   a. With regard to the **language**, the international search was carried out on the basis of the international application in the language in which it was filed, unless otherwise indicated under this item.

      [ ] the international search was carried out on the basis of a translation of the international application furnished to this Authority (Rule 23.1(b)).

   b. With regard to any **nucleotide and/or amino acid sequence** disclosed in the international application, the international search was carried out on the basis of the sequence listing :

      [ ] contained in the international application in written form.
      [ ] filed together with the international application in computer readable form.
      [ ] furnished subsequently to this Authority in written form.
      [ ] furnished subsequently to this Authority in computer readble form.
      [ ] the statement that the subsequently furnished written sequence listing does not go beyond the disclosure in the international application as filed has been furnished.
      [ ] the statement that the information recorded in computer readable form is identical to the written sequence listing has been furnished

2. [ ] **Certain claims were found unsearchable** (See Box I).

3. [ ] **Unity of invention is lacking** (see Box II).

4. With regard to the **title**,

   [X] the text is approved as submitted by the applicant.
   [ ] the text has been established by this Authority to read as follows:

5. With regard to the **abstract**,

   [X] the text is approved as submitted by the applicant.
   [ ] the text has been established, according to Rule 38.2(b), by this Authority as it appears in Box III. The applicant may, within one month from the date of mailing of this international search report, submit comments to this Authority.

6. The figure of the **drawings** to be published with the abstract is Figure No. 6A

   [ ] as suggested by the applicant.
   [X] because the applicant failed to suggest a figure.
   [ ] because this figure better characterizes the invention.

   [ ] None of the figures.

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No
PCT/GB 00/03431

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5592170 A	07-01-1997	NONE	
US 5829877 A	03-11-1998	SE 501473 C	27-02-1995
		AU 688302 B	12-03-1998
		AU 6013094 A	29-08-1994
		CA 2155339 A	18-08-1994
		EP 0698205 A	28-02-1996
		JP 8508338 T	03-09-1996
		SE 9300347 A	04-08-1994
		WO 9418550 A	18-08-1994
		US 6084415 A	04-07-2000
US 5774091 A	30-06-1998	US 5510800 A	23-04-1996
		US 5457394 A	10-10-1995
		US 5345471 A	06-09-1994
		AU 4742296 A	10-07-1996
		CA 2208070 A	27-06-1996
		CN 1173226 A	11-02-1998
		EP 0799428 A	08-10-1997
		JP 10511182 T	27-10-1998
		WO 9619737 A	27-06-1996
		US 5805110 A	08-09-1998
		US 5767953 A	16-06-1998
		US 5519400 A	21-05-1996
		US 5757320 A	26-05-1998
		AU 3499995 A	27-03-1996
		CA 2199120 A	14-03-1996
		EP 0779990 A	25-06-1997
		JP 10505671 T	02-06-1998
		WO 9607928 A	14-03-1996
		US 5576627 A	19-11-1996
		US 5589838 A	31-12-1996
		US 5661490 A	26-08-1997
		AU 6905494 A	12-12-1994
		CA 2162257 A	24-11-1994
		DE 69425373 D	31-08-2000
		EP 0700528 A	13-03-1996
		JP 9500960 T	28-01-1997
		WO 9427168 A	24-11-1994
		US 5512834 A	30-04-1996
		CA 2160351 A	27-10-1994
		EP 0694235 A	31-01-1996
		JP 8509110 T	24-09-1996
		WO 9424788 A	27-10-1994
		US 5523760 A	04-06-1996
		US 5517198 A	14-05-1996
GB 2316233 A	18-02-1998	FR 2751471 A	23-01-1998
		IT TO910927 A	15-06-1992

INTERNATIONAL SEARCH REPORT

International Application No
PCT/GB 00/03431

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 G01N22/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 G01N G01S H01Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, INSPEC, PAJ, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 592 170 A (DAVIS III HERBERT T ET AL) 7 January 1997 (1997-01-07) abstract column 2, line 13 - line 38 claims 1,4,5 ---	55,56,60
X	US 5 829 877 A (BAAAATH LARS B) 3 November 1998 (1998-11-03) abstract ---	55,60
A	US 5 774 091 A (MCEWAN THOMAS E) 30 June 1998 (1998-06-30) abstract figure 2 column 6, line 9 - line 17 column 6, line 35 - line 36 column 6, line 64 - line 67 claim 1 ---	1-54

-/--

[X] Further documents are listed in the continuation of box C.

[X] Patent family members are listed in annex.

° Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed
- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
19 December 2000	11/01/2001

Name and mailing address of the ISA	Authorized officer
European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016	Ó Donnabháin, C

4

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication,where appropriate, of the relevant passages	Relevant to claim No.
A	MOSCHURING H ET AL: "The measurement of inhomogeneities and of the permittivity distribution in MIC substrates" CONFERENCE PROCEEDINGS. IEEE INSTRUMENTATION AND MEASUREMENT TECHNOLOGY CONFERENCE (CAT. NO.87CH2405-9), BOSTON, MA, USA, 27-29 APRIL 1987, pages 154-159, XP002155670 1987, New York, NY, USA, IEEE, USA the whole document ---	1
A	VLAHACOS C P ET AL: "QUANTITATIVE TOPOGRAPHIC IMAGING USING A NEAR-FIELD SCANNING MICROWAVE MICROSCOPE" APPLIED PHYSICS LETTERS,US,AMERICAN INSTITUTE OF PHYSICS. NEW YORK, vol. 72, no. 14, 6 April 1998 (1998-04-06), pages 1778-1780, XP000742929 ISSN: 0003-6951 the whole document ---	1
A	GB 2 316 233 A (DASSAULT ELECTRONIQUE) 18 February 1998 (1998-02-18) figure 2D -----	19

4